

STU2FABCR2



Product Family	Dishwashers
Finishing	Glossy
Commercial width	60 cm
Commercial height	82 cm
Installation	Under counter built-in
N° baskets	3, FlexiDuo
Motor	Single phase
EAN code	8017709303624



Programs / Functions



N. of programmes	10	Delicate	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	Auto	Yes
Soak	Yes	Crystal & China	Yes
Express 27'	Yes	Eco express	Yes
Mix	Yes	Express 60'	Yes
Sterilise	Yes	Pots & Pans	Yes

Options



Dry Assist option	Yes	1/2 load FlexiZone option	Yes
Delay timer option	Up to 9 hours	Special programs option	Yes

Baskets



Basket components colour	Grey	Largest loadable dish in upper basket	23,5 inches
Upper Basket	With 1 foldable rack	Lower Basket	With 2 foldable racks
Glass holder	Yes	Lower basket with anti-drip inserts	Yes
Height adjustment of the upper basket	On three levels (5 cm)	Largest loadable dish in lower basket	30,0 inches

**Sliding Guides Extra
Glide** Yes

Cutlery basket Yes

Technical Features




Width (mm) 23 9/16 "
Depth (mm) 21 7/16 "
Display type LED display (1 digit)
Product Height (mm) 32 3/16 "
Display Delayed start
Programme graphics Symbols
On/off indicator Yes
Salt light indicator Light
Rinse aid indicator Light
End of cycle indicator Acoustic signal
Washing system Planetarium
Third spray arm Single
Water softener With electronic setting
Turbidity sensor Yes
Aquatest

Flood protection system Total Acquastop
Max water hardness 100°FH;58°dH
Drying system Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle
Tub material Stainless steel
Filter Stainless steel
Concealed heating element Yes
Hinges Self balancing with fixed hinges
Min. and max plinth height 98 - 168 mm
Adjustable feet 7cm, from 820 to 890 mm
Additional gaskets Yes
Back cover Yes
Depth of dishwasher with open door (mm) 1146
Top cover Metallic sheet

Electrical Connection

Plug (A) USA e Messico
Connected power 1800 W
Current 13 A
Voltage 115 V

Frequency (Hz) 60 Hz
Type of connection Single-phase
Power supply cable length 140 "

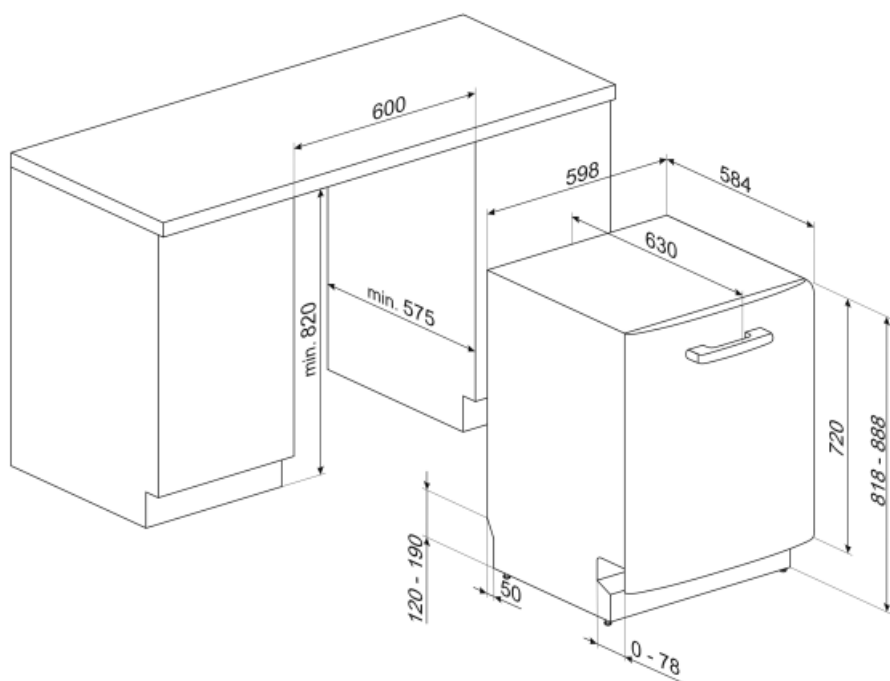

Not included accessories

KITPL60FABB




Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABX




















Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary (TT)

	The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.		To improve the drying of dishes without leaving stains.
	82 cm high		Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.
	The Dry Assist option ensures optimal drying of the dishes by automatically opening the door at the end of the wash cycle. Reducing the rinse temperature.		FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.
	FlexiZone: The 1/2 load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.		The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.
	Noise Level: Excellent insulation and special devices keep noise to a minimum.		The Planetarium washing system, with high rotations per minute, guarantees complete coverage of the tank, thanks to the simultaneous rotation of base and sprayers, and excellent washing results.
	Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.		Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.
	Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.		Soak programme: The soak programme provides a rinse to prevent dirt from drying.
	Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.		13 place settings: Number of place settings.
	Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.		Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (
	STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.		