


STU8612X



Product Family	Dishwashers
Finishing	Fingerproof
Commercial width	60 cm
Commercial height	86 cm
Installation	Under counter built-in
N° baskets	2
Motor	Single phase
EAN code	8017709303662



Programs / Functions



N. of programmes	5	Delicate	Yes
Washing temperatures	45, 50, 65, 70 °F	Normal	Yes
Soak	Yes	Pots & Pans	Yes
Mix	Yes		

Options



Delay timer option	Up to 9 hours	1/2 load FlexiZone option	Yes
Extra dry option	Yes		

Baskets

Basket colour	Grey	Lower Basket	With fixed racks
Upper Basket	With central fixed racks	Largest loadable dish in lower basket	35,0 inches
Glass holder	Yes	Colour Inner Components	Blue
Height adjustment of the upper basket	On two levels, by extraction	Cutlery basket	Yes
Largest loadable dish in upper basket	18,0 inches		


Technical Features



Width (mm)	23 9/16 "	Drying system	Natural condenser drying
Depth (mm)	21 5/8 "	Tube material	Stainless steel
Display type	LED display (1 digit)	Filter	Stainless steel
Product Height (mm)	33 3/4 "	Hinges	Self balancing with fixed hinges
Display	Delayed start	Min. and max. frontal panel weight	2 - 8 lbs
Programme graphics	Symbols	Min. and max plinth height	100 - 228 mm
Rinse aid indicator	Light	Adjustable feet	7cm, from 860 to 930 mm
End of cycle indicator	Acoustic signal	Additional gaskets	Yes
Washing system	Standard	Back cover	Yes
Third spray arm	Single	Depth of dishwasher with open door (mm)	1186
Flood protection system	Single Acquastop	Top cover	Metallic sheet
Max water hardness	100°FH;58°dH		

Electrical Connection

Plug	(A) USA e Messico	Frequency (Hz)	60 Hz
Connected power	1800 W	Type of connection	Single-phase
Current	13 A	Power supply cable length	140 "
Voltage	115 V		

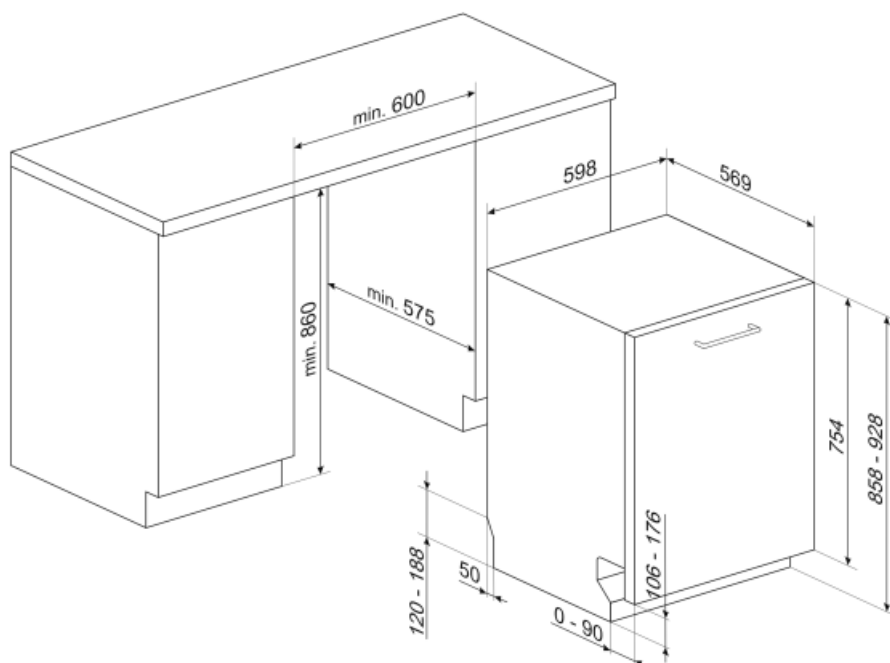

Not included accessories

KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX












Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary (TT)

	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.		86 cm high
	Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.		Fingerprint proof stainless steel: Fingerprint proof stainless steel keeps stainless steel looking as good as new.
	FlexiZone: The 1/2 load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.		Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.
	Soak programme: The soak programme provides a rinse to prevent dirt from drying.		13 place settings: Number of place settings.
	EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.		