

Operating Instructions Bottom-mount Unit



To prevent accidents and machine damage, read these instructions **before** installation or use.

en - US/CA M.-Nr. 12 033 280

Contents

IMPORTANT SAFETY INSTRUCTIONS				
Caring for the environment	17			
Installation Installation location Side-by-side combinations Climate class Ventilation Cabinet doors - Weight of the door panel Calculation of cabinet door size Installation dimensions Installation in a tall cabinet/side view Connections and ventilation Limiting the opening angle of the appliance doors Electrical connection	18 18 19 20 21 22 23 27 27 28 29 30			
Saving energy	31			
Guide to the appliance Control panel with status display Settings mode ② Selecting the desired function in Settings mode ② Adjusting the interior fittings Moving the door shelf/bottle shelf. Clipping the egg trays on Adjusting or removing the bottle holder Moving the adjustable shelves Space for a baking tray Moving the carbon filter Accessories supplied Optional accessories	32 34 34 36 37 37 37 37 38 38 39			
Switching on and off Before using for the first time	41 41 41 42 42 43			
The correct temperature Temperature display	44 45			

Contents

Setting the temperature in the refrigerator/freezer sections Possible temperature settings	45 45
Using Automatic SuperCool, SuperFrost, and DynaCool	46
Selecting additional settings Explanation of the different settings. Party mode \(\frac{1}{2} \) Vacation mode \(\frac{1}{2} \) Switching the safety-lock function \(\frac{1}{2} \) Sabbath mode \(\frac{1}{1} \) Information on Sabbath mode \(\frac{1}{1} \) Changing the time before the door alarm \(\frac{1}{2} \) is triggered Miele@home. Changing the volume of the alarms and audible signals \(\frac{1}{2} \))/\(\frac{1}{2} \) Adjusting the display brightness \(\frac{1}{2} \) Switching off Demo mode \(\frac{1}{2} \) Resetting the settings to their factory default settings \(\frac{1}{2} \) Information \(\frac{1}{2} \) Carbon-filter change indicator \(\frac{1}{2} \) Cleaning mode \(\frac{1}{2} \)	49 49 49 50 51 52 52 54 55 56 56 56
Temperature and door alarm	57 58
Storing food in the refrigerator section Different storage zones Food which is not suitable for storage in the fridge zone Notes on buying food Storing food correctly	59 60 61 61 61
Storing food in the DailyFresh drawer	62
Freezing and storing food. What happens when you freeze fresh food? Maximum freezing capacity Storing frozen food. Home freezing Storage time for frozen food. Cooling drinks quickly Using accessories Making ice cubes	64 64 64 65 66 67 67
Defrosting	68

Contents

Cleaning and care	69
Cleaning agents	69
Preparing the refrigeration appliance for cleaning	70
Cleaning the interior of the appliance	
Cleaning accessories by hand or in the dishwasher	
Removing, dismantling, and cleaning accessories	
Cleaning the door seal	
Cleaning the ventilation gaps	74
After cleaning	74
Frequently Asked Questions	75
The interior lighting is not working	84
Causes of noises	85
Customer Service	86
Contact in the event of a fault	86
Appliance warranty and product registration	

This refrigeration appliance complies with current safety requirements. Inappropriate use can, however, lead to personal injury and material damage.

Please read the operating and installation instructions carefully before using the refrigeration appliance for the first time. They contain important information on safety, installation, use, and maintenance. This is to protect yourself from injury, and from damaging your refrigeration appliance.

Miele expressly and strongly advises that you read and follow the instructions in the chapter on installing the refrigeration appliance as well as in the "IMPORTANT SAFETY INSTRUCTIONS".

Miele cannot be held liable for injury or damage caused by noncompliance with these instructions.

Keep these instructions in a safe place and pass them on to any future owner.

Appropriate use

- This appliance is intended for use in domestic households and similar residential environments such as
- staff kitchen areas in shops, offices and other working environments
- farm houses and by clients in hotels, motels and other residential type environments
- bed and breakfast type environments
- catering and similar non-retail applications.

This appliance is not intended for use outdoors, in damp environments or in places exposed to rain.

- ► This appliance is intended for domestic use only for cooling and storing food and drink as well as for storing deep frozen food, freezing fresh food and for making ice. Any other usage is not supported by the manufacturer and could be dangerous.
- This refrigeration appliance is not suitable for storing and keeping cool medicines, blood plasma, laboratory preparations, or other similar substances or products that are subject to the Medical Device Directive. Incorrect use of the refrigeration appliance for such purposes may cause deterioration of the items stored. The refrigeration appliance is also not suitable for use in areas where there is a risk of explosion.

Miele cannot be held liable for damage resulting from incorrect or improper use or operation.

► This refrigeration appliance may only be used by people (including children) with reduced physical, sensory, or mental capabilities or lack of experience and knowledge if they are supervised while using it.

The refrigeration appliance may only be used by these people without supervision if they have been shown how to use it in a safe way and recognize and understand the consequences of incorrect operation.

Safety with children

- Children should be supervised in the vicinity of the appliance.
- Children ages eight and up may only use the appliance even without supervision if they have been shown how to use it in a safe manner, and if they are able to recognize and understand the potential risks of improper use.
- Children must not clean or service the appliance unless they are under supervision.
- To reduce the risk of injury, do not allow children to play in, on or near the appliance.
- ► Ensure that any packing material is disposed of safely and kept out of the reach of children. DANGER of suffocation!

Technical safety

The coolant circuit has been checked for leaks. The refrigeration appliance complies with statutory and regulatory requirements.



► The symbol is located on the compressor and indicates the danger of inflammable materials. Do not remove the label.

WARNING! This refrigeration appliance contains the coolant Isobutane (R600a), a natural gas which is environmentally friendly, but flammable. Although it is combustible, it does not damage the ozone layer and does not contribute to the greenhouse effect.

The use of this coolant has, however, led to a slight increase in the noise level of the appliance. In addition to the noise of the compressor, you might be able to hear the coolant flowing around the cooling circuit. Unfortunately, this cannot be avoided, but it does not affect the performance of the refrigeration appliance.

WARNING! When transporting and installing the refrigeration appliance, ensure that no parts of the cooling circuit are damaged. Splashes of coolant can damage the eyes.

In the event of damage:

- Avoid open flames or anything which creates a spark.
- Disconnect the refrigeration appliance from the power supply.
- Ventilate the room where the refrigeration appliance is located for several minutes.
- Contact Miele Customer Service.
- The more coolant there is in a refrigeration appliance, the larger the room it should be installed in. In the event of a leakage, if the appliance is in a small room, there is the danger of a combustible gas/air mixture building up. For every 11 g of coolant, at least 1 m³ of room space is required. The amount of coolant in the refrigeration appliance is stated on the data plate inside the appliance.

- To avoid the risk of damage to the appliance, make sure that the connection data (fuse rating, frequency and voltage) on the data plate corresponds to the household supply.
- Check that this is the case before connecting the appliance. Consult a qualified electrician if in any doubt.
- ► The electrical safety of the appliance can only be guaranteed when correctly grounded. It is essential that this standard safety requirement is met. If in any doubt please have the electrical installation tested by a qualified electrician.
- Temporary or permanent operation on an autonomous power supply system or a power supply system that is not synchronized with the grid power supply (e.g., island networks, back-up systems) is possible. A prerequisite for operation is that the power supply system complies with national and local codes.

The function and operation of the protective measures provided in the domestic electrical installation and in this Miele product must also be maintained in isolated operation or in operation that is not synchronized with the grid power supply, or these measures must be replaced by equivalent measures in the installation.

- If the power cord supplied is damaged, it must only be replaced by an original part to prevent a hazard for the user. Miele can only guarantee the safety of the appliance when original Miele parts are used.
- ▶ Do not connect the appliance to the electrical supply with a power bar or extension cord. These are a fire hazard and do not guarantee the required safety of the appliance.
- If moisture gets into electrical components or into the power cord, it could cause a short circuit. Therefore, do not operate the machine in areas where there may be moisture or splashing water (e.g., garages, laundry rooms).
- This appliance must not be installed and operated in mobile installations (e.g. on a ship).

- ▶ Do not use a damaged appliance. It could be dangerous. Check the appliance for visible signs of damage.
- For safety reasons, this appliance may only be used after it has been built in.
- During installation, side-by-side heater installation, maintenance and repair work, the appliance must be disconnected from the electrical power supply. It is only completely isolated from the electricity supply when:
 - the circuit breaker has been tripped, or
 - the screw-type fuses on the electrical service panel have been removed or
 - the power cord has been unplugged. Pull on the plug and not on the cord when removing it from the outlet.
- ► Installation, repair, and maintenance work should only be performed by a Miele-authorized service technician.

 Work by unqualified persons could be dangerous and may void the warranty.
- Any manufacturer's warranty may be void if the appliance is not repaired by a Miele approved service technician.
- ► Faulty components must only be replaced by genuine Miele replacement parts. Miele can only guarantee the safety standards of the appliance when Miele replacement parts are used.
- This refrigeration appliance is supplied with a special bulb to cope with particular conditions (e.g., temperature, moisture, chemical resistance, abrasion resistance, and vibration). This bulb must only be used for the purpose for which it is intended. The bulb is not suitable for room lighting. Replacement bulbs may only be installed by an authorized technician or by Miele Customer Service.

Proper installation

- ► When installing the refrigeration appliance, it is a mandatory requirement to follow the installation instructions supplied with it.
- Two people are required to install the appliance.
- ► Change the door hinging (if necessary) as described in these installation instructions.
- Only install the refrigeration appliance in a solid, rectangular, and level housing unit, positioned on an even and level floor.

Correct use

- This refrigeration appliance is designed for use within specific ambient temperatures (climate range). Do not use in ambient temperatures for which it is not designed. The climate range is stated on the data plate in the interior cabinet of the refrigeration appliance. A lower ambient temperature will cause the compressor to switch off for longer periods, meaning that the refrigeration appliance is unable to maintain the required temperature.
- WARNING! DANGER of overheating! Do not cover or block the air vents. This can impair the efficiency of the appliance, increase the power consumption and cause damage to the appliance.
- If storing food which contains a lot of fat or oil in the appliance, make sure that it does not come into contact with plastic components as this could cause stress cracks or break the plastic.
- ▶ Risk of fire and explosion. Do not store any explosive materials or products containing flammable propellants (e.g., spray cans) in the appliance. Electrical components can cause flammable mixes of gases to ignite.
- ► WARNING! Risk of explosion. Do not operate any electrical equipment (e.g., an electric ice-cream maker) inside the refrigeration appliance. Risk of sparking and explosion.
- ▶ Risk of injury and damage. Do not store cans or bottles containing carbonated drinks or liquids which could freeze in the freezer section. Otherwise they could burst.
- ▶ Risk of injury and damage. When chilling drinks in the freezer section, make sure that bottles are not left in for more than one hour. Otherwise they could burst.
- ▶ Risk of injury. Never handle frozen food or the metal parts of the appliance with wet hands. Your hands may freeze to the frozen food or to the metal.

- ▶ Risk of injury. Do not take ice cubes out with your bare hands and never place ice cubes or ice pops in your mouth straight from the freezer section. The very low temperature of the frozen food can cause frost burn to the lips and tongue.
- ▶ Do not refreeze partially or fully defrosted food. Consume defrosted food as soon as possible, as it will lose its nutritional value and spoil if left for too long. Defrosted food may only be refrozen after it has been cooked.
- ▶ When eating stored food, there is a danger of food poisoning. Storage times will depend on several factors, including the freshness and quality of the food, as well as the temperature at which it is stored. Observe the manufacturer's "use-by" dates and storage instructions.

Accessories and parts

- Use only genuine original Miele parts. If parts or accessories from other manufacturers are used, the warranty may become invalid.
- ▶ Miele will guarantee to supply functional spare parts for a minimum of 10 years and up to 15 years following the discontinuation of your refrigeration appliance.

Cleaning and maintenance

- ▶ Do not use any oil or grease on the door seals. They can cause the seals to deteriorate over time.
- ➤ WARNING! DANGER of injury and damage! Do not use any mechanical or other types of aids which are not recommended by the manufacturer to accelerate the defrosting process.
- Never use a steam cleaner to clean the appliance. The steam can reach the electrical components and cause a short circuit.
- Sharp edged or pointed objects will damage the evaporator, causing irreversible damage to the appliance. Do not use sharp edged or pointed objects to
 - remove frost or ice,
 - separate frozen foods or remove ice trays.
- Never place electric heaters or candles in the appliance to defrost it. These can damage the plastic parts.
- ▶ Do not use defrosting sprays or de-icers, as they could contain substances which could damage the plastic parts or which might cause the build-up of gases and pose a danger to health.

Transport

- To avoid damage to the appliance, always transport it upright and in its packaging.
- ► Risk of injury and damage. The refrigeration appliance is very heavy and must be transported by two people.

Disposal of your old appliance

- ▶ DANGER. Risk of child entrapment!
 Children could become trapped in the machine and could suffocate.
 - Remove the machine doors.
 - Remove the drawers.
 - Leave the adjustable shelves in the machine so children cannot easily climb inside.
- DANGER of electric shock!
 - Cut the plug off the power cord.
 - Cut the power cord off the old appliance.
- Dispose of them separately from the appliance.
- Ensure that the appliance is not stored in the vicinity of gasoline or inflammable gases and liquids during and after disposal.
- WARNING! Make sure that the coolant pipework is not damaged during disposal to avoid uncontrolled leakage of oil and coolant (see data plate for coolant type).
- ▶ If your old refrigeration appliance has a door lock, destroy it. This will prevent the risk of children playing accidentally locking themselves in and endangering their lives.
- ► Splashes of coolant can cause damage to the eyes. Be careful not to damage any part of the pipework while awaiting disposal, e.g. by
 - puncturing the coolant channels in the evaporator,
 - kinking any pipework,

- scratching the surface coating.

Symbol on the compressor (depending on model)

This information is only relevant for recycling. There is no risk during normal operation.



The oil in the compressor can be fatal if swallowed or if it penetrates the airways.

Symbol on the rear of the appliance (depending on model)

This label or a similar one is only relevant for recycling. Do not remove the lable.



This information refers to the foamed-in panels in the door and/or the housing.

Caring for the environment

Disposal of packaging material

The packaging is designed to protect the appliance from damage during transportation. The packaging materials used are selected from materials which are environmentally friendly for disposal and should be recycled.

Ensure that any plastic wrappings, bags, etc. are disposed of safely and kept out of the reach of children. Return the packaging to your dealer.

Disposing of your old appliance

Electrical and electronic appliances contain many valuable materials. They also contain certain materials, compounds, and components which were essential for their correct functioning and safety. These could be hazardous to your health and to the environment if disposed of with household trash or if handled incorrectly. Please do not, therefore, dispose of your old appliance with household trash.



Follow the local regulations or the disposal of appliances. Instead, please make use of officially designated collection and disposal points to dispose of and recycle electrical and electronic appliances. By law, you are solely responsible for deleting any personal data from the appliance prior to disposal.

Take care not to damage your refrigeration appliance's pipework before or during transportation to an authorized collection depot.

This is to ensure that coolant in the cooling circuit and oil in the compressor is contained, and will not leak into the environment.

Installation

Installation location

MARNING! Risk of damage and injury due to the refrigeration appliance tipping over.

This refrigeration appliance is very heavy and can tip forward when the door is open.

Keep the appliance door(s) closed until the refrigeration appliance has been built in. The refrigeration appliance must be secured in its building-in niche in accordance with the operating and installation instructions.

Fire hazard and risk of damage from appliances that give off heat.

Appliances that give off heat can catch fire and set fire to the refrigeration appliance.

This refrigeration appliance must not be installed underneath a cooktop.

Tire hazard and risk of damage from open flames.

Open flames can set fire to the refrigeration appliance.

Keep open flames (such as a candle) away from the refrigeration appliance.

This appliance should be installed in a dry, well-ventilated room.

When deciding where to install your refrigeration appliance, please bear in mind that it will use more energy if installed near to a heater, a range, or another appliance that gives off heat. Avoid direct sunlight.

The higher the ambient temperature, the longer the compressor runs and the higher the energy consumption is.

When installing the appliance, please note:

- IMPORTANT! The power plug must be easily accessible so that the appliance can be disconnected from the mains quickly in an emergency. It must not be behind the back of the appliance.
- The plug and power cord must not touch the back of the appliance as they could be damaged by vibrations from the appliance.
- Do not plug other appliances into electrical outlets behind this appliance.

Risk of damage due to high humidity.

In environments with high humidity, condensation can build up on external refrigeration-appliance panels. This condensate can cause corrosion on external appliance panels.

Install the refrigeration appliance in a dry and/or air-conditioned room with sufficient ventilation.

After installation please make sure that the appliance door(s) closes (close) properly and the refrigeration appliance is installed in accordance with these installation instructions. The specified ventilation specifications must be observed.

Side-by-side combinations

Aisk of damage due to condensation on external appliance panels. In environments with high humidity, condensation can build up on external appliance panels, which can cause corrosion.

Do not place different refrigeration appliances directly next to or on top of one other.

Exception: your refrigeration appliance can be installed next to another refrigeration appliance with an integrated heating unit if each appliance is built into a separate niche. Please contact your dealer for specific information about which combinations will work with your refrigeration appliance.

Installation

Climate class

This refrigeration appliance is designed for use within specific ambient temperatures (climate range). Do not use in ambient temperatures for which it is not designed. The climate range is stated on the data plate in the interior cabinet of the refrigeration appliance.

Climate class	Ambient temper- ature
SN	50 to 90°F/ +10 to +32°C
N	60 to 90°F/ +16 to +32°C
ST	60 to 100°F/ +16 to +38°C
Т	60 to 109°F/ +16 to +43°C

A lower ambient temperature leads to the compressor switching off for longer periods. This can cause the internal temperature in the refrigeration appliance to rise with the risk of food deteriorating and going off.

Ventilation

MARNING! Fire hazard and risk of damage due to insufficient ventilation.

If the refrigeration appliance is not ventilated sufficiently, the compressor will run more frequently and for longer periods. This causes increased energy consumption and an increased compressor operating temperature, which can result in damage to the compressor.

Please ensure that there is adequate ventilation around the refrigeration appliance.

It is essential to observe the required ventilation gaps.

The ventilation gaps must never be obstructed.

They must also be cleaned on a regular basis to remove dust.

There must be a gap of at least ½ inch (13 mm) between the back of the appliance and the rear wall. If this gap is not maintained, this will result in increased energy consumption.

Air at the back of the refrigeration appliance gets warm. The appliance housing unit must therefore be constructed to allow sufficient space for ventilation (see "Installation dimensions" and the installation instructions provided).


- To ensure ventilation an air channel of a minimum 1 1/2" (40 mm) depth must be provided at the back of the appliance.
- The ventilation slits in the toe-kick, in the cabinet and under the top of the cabinet must provide a total

- passage volume of at least 31"² (200 cm²) to allow the warm air to dissipate unimpeded.
- If you wish to fit a grille in the ventilation openings, the ventilation openings must be larger than 31"² (200 cm²). The passage volume of 31"² (200 cm²) is the total area of the opening slits in the grille.
- Important! The larger the ventilation slits, the more economically the appliance will work.

Installation

Lower ventilation slit

The appliance can be ventilated via the cabinet plinth with the ventilation grille supplied or with a minimum ventilation opening of 31 in² cross-section area. When using the grille supplied, please proceed as follows:



- Cut an opening in plinth ② as shown in the diagram.
- Place ventilation grille ① in the opening.
- Push snap fasteners ③ into the ventilation grille from behind until the hooks touch the plinth.
- Reinstall the plinth with the ventilation grille.

Cabinet doors

An upper cabinet door for the refrigerator section and a lower cabinet door for the freezer section are required.

The cabinet doors must be at least 5/8" (16 mm) / 3/4" (19 mm) thick.

- Weight of the door panel

If the door panel is too heavy damage can occur.

Installing a door panel which is heavier than the maximum permitted weight could damage the hinges. This can cause subsequent functional problems.

Before installing the door panel, ensure that the weight of the door panel does not exceed the maximum permitted weight.

The maximum permissible weights of the door panels in lb (kg) are:

Appliance	Upper door panel	Lower door panel
KFN 7734 F, KFN 7734 D	39.7 (18)	26.5 (12)

Calculation of cabinet door size

The width of the cabinet door depends on the style of the kitchen and the gap between the unit door panels.

When calculating the **height of the cabinet door**, remember that the top edge of the door must be at the same height as that of the doors of the adjacent units

The cabinet door must be fitted correctly and not under tension.

Horizontal and vertical gaps

Depending on the style of kitchen cabinetry, the thickness and edge radius of the custom door panel and the gap that runs around the door, vertically and horizontally, are specified.

It is essential to pay attention to the following:

- Horizontal gap

The gap between the door panel and the housing-unit door above or below it must be at least 1/8" (3 mm).


- Vertical gap

If the gap between the refrigerationappliance door panel and the adjoining housing-unit door or wall on the hinged side is too small, the appliance door could collide with the adjoining housing-unit door or wall when opened.

It may be necessary to adjust the size of this gap to suit the thickness and edge radius of the door panel.

This must be taken into consideration when planning your kitchen and when replacing an old refrigeration appliance with a new one to ensure the installation conditions required are met.

Door panel thickness A [in (mm)]	Gap X [in (mm)] for different edge radii B			
	R0	R1.2	R2	R3
≥5/8"- 3/4" (16–19)		min. 1	/8" (3)	
13/16"	3/16"	3/16"	3/16"	1/8"
(20)	(5)	(4)	(4)	(3.5)
13/16"	3/16"	3/16"	3/16"	3/16"
(21)	(5.5)	(5)	(4.5)	(4)
7/8" (22)	1/4"	1/4"	3/16"	3/16"
	(6.5)	(6)	(5.5)	(5)




Adjoining housing-unit door

A = Door-panel thickness

B = Edge radius

X = Gap

Installation



Adjoining side wall

A = Door-panel thickness


B = Edge radius

X = Gap

Tip: Fit a spacer between the housingunit body and the side wall. This way you will get a sufficiently wide gap.

Tip: Please also see the diagram and information on the following pages on calculating the cabinet door height.

Cabinet door dimensions

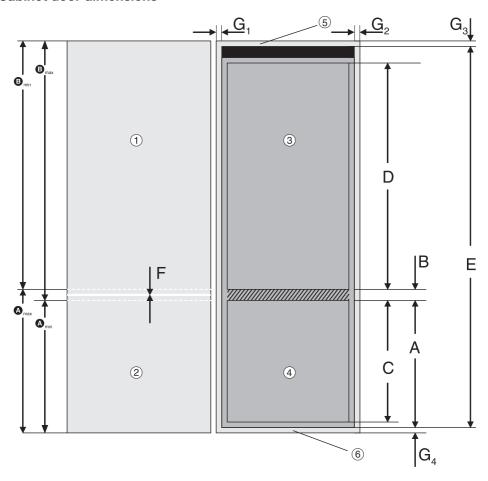

- $oldsymbol{\Delta}_{\min}$ / $oldsymbol{\Delta}_{\max}$ height of freezer section cabinet door $oldsymbol{B}_{\min}$ / $oldsymbol{B}_{\max}$ height of refrigerator section cabinet door
- 1 Refrigerator section cabinet door
- 2 Freezer section cabinet door
- 3 Refrigerator section appliance door
- 4 Freezer section appliance door
- 5 Fitted unit cover panel
- 6 Fitted unit cabinet base

Installation

Α	27 3/8" (695 mm)
В	9/16" (15 mm)
С	24 3/4" (629 mm)
D	38 15/16" (989 mm)
Е	70 3/8" (1788 mm)
F	approx. 1/8" (3 mm)
G ₁₋₄	3/4" (19 mm)

Calculating the height of the cabinet doors

These examples are based on the following measurements, which may vary depending on the design of the kitchen:

- The horizontal gap between cabinet doors ① and ② is F = approx.
 1/8" (3 mm). This gap must be within the hatched area (see drawing).
- The thickness of the cover panel (5) and the base (6) of the fitted unit is usually 3/4" (19 mm).

Height of freezer section cabinet door ⁽²⁾

- The freezer section cabinet door must be at least A = 27 3/8" (695 mm) to cover the bottom section of the appliance.
- To cover the front of the cabinet floor panel ⑥, add the height of the cabinet base to height A:

$$A_{min} = A + G_4 = 28 \frac{1}{8}$$
" (714 mm).

3. The height of the cabinet door may need to be altered depending on the adjacent kitchen units:

- Height of refrigerator section cabinet door ①

This height is calculated on the basis of the freezer section cabinet door ② height:

1. Height of freezer section cabinet door = \mathbf{A}_{max} :

$$\mathbf{B}_{min} = A + G_3 + G_4 - \mathbf{A}_{max} - 1/8" (3 mm) = 43 3/16" (1097 mm)$$


2. Height of freezer section cabinet door = \mathbf{A}_{min} :

$$\mathbf{B}_{\text{max}} = A + G_3 + G_4 - \mathbf{A}_{\text{min}} - 1/8$$
" (3 mm)
= 43 11/16" (1109 mm)

Installation dimensions

Installation in a tall cabinet/side view

All dimensions are given in inches (mm).

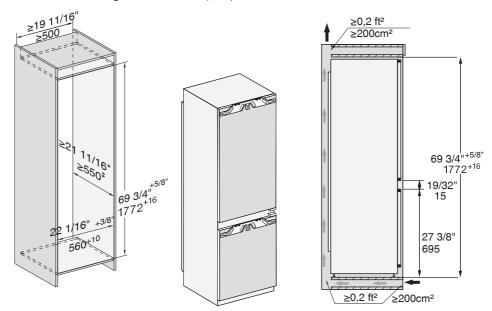

^{*} The declared energy consumption was achieved with a niche depth of 22 1/16" (560 mm). The refrigeration appliance is fully capable of functioning at a niche depth of 21 5/8" (550 mm) but will consume slightly more energy.


Before installation, ensure the housing-unit dimensions are the correct size.


Installation

Connections and ventilation

All dimensions are given in inches (mm).

The specified ventilation cross-sections must be adhered to in order to ensure the correct functioning of the refrigeration appliance.





- 1 Front view
- ② Power cord, length = 7' 2" (2,200 mm)
 A longer power cord is available to order from Miele Customer Service.
- 3 Ventilation cut-out min. 31"2 (200 cm²)
- 4 Ventilation
- 5 No connections permitted in the rear panel


Limiting the opening angle of the appliance doors

The door hinges are set to enable the appliance doors to be opened wide.

If the opening angle of the doors needs to be limited to approx. 90°, the hinge can be adjusted to accommodate this.

The locking pins for limiting the door opening must be installed before the appliance is installed.

The refrigerator-section door must be taken off in order to insert the pins into the upper hinge of the freezer-section door (see the installation instructions provided).



Insert the locking pins supplied for limiting the door opening into the hinges from above.

This will limit the opening angles of the appliance doors to approx. 90°.

Installation

Electrical connection

The refrigeration appliance must only be connected to a grounded outlet using the power cord supplied.

The outlet must be easily accessible after the refrigeration appliance has been installed. If the outlet is not easily accessible, ensure that a suitable means of disconnection is provided on the installation side for each pole.

Risk of fire from overheating.
Connecting the refrigeration appliance to a power bar or to an extension cord can overload the cord.
For safety reasons, do not use a power bar or an extension cord.

The electrical installation must comply with VDE 0100.

For safety reasons, we recommend using a type $\[\bigcirc \]$ residual current device (RCD) in the assigned electrical installation for connecting the refrigeration appliance.


If the power cord is damaged, it must only be replaced with a specific cord of the same type (available from Miele Customer Service). For safety reasons, such replacement may only be carried out by a qualified technician or Miele Customer Service.

These operating instructions and the data plate indicate the nominal power consumption and the appropriate fuse rating. Compare this information with the data of the on-site electrical connection.

If in any doubt, consult a qualified electrician.

Temporary or permanent operation on an autonomous power supply system or a power supply system that is not synchronized with the grid power supply (e.g., island networks, back-up systems) is possible. A prerequisite for operation is that the power supply system complies with the specifications of EN 50160 or an equivalent standard. The function and operation of the protective measures provided in the domestic electrical installation and in this Miele product must also be maintained in isolated operation or in operation that is not synchronized with the grid power supply, or these measures must be replaced by equivalent measures in the installation. As described, for example, in the current version of VDE-AR-E 2510-2

Connecting the appliance



Insert the electrical plug into the back of the refrigeration appliance.

Make sure that the electrical plug has clicked into position correctly.

■ Insert the electrical plug of the refrigeration appliance into the socket.

The refrigeration appliance is now connected to the electricity supply.

How to save energy:

Installation location

The refrigeration appliance has to cool more often at higher ambient temperatures and consumes more energy in the process. Therefore, you should:

- Install the refrigeration appliance in a well-ventilated room.
- Do not install the refrigeration appliance near to a heat source (heater element, range).
- Protect the refrigeration appliance from direct sunlight.
- Ensure an ideal ambient temperature of 68°F (20°C).
- Clean the ventilation gaps on a regular basis to remove any dust.

Temperature setting


The colder the temperature, the higher the energy consumption. The following settings are recommended:

- 39 to 41°F (4 to 5°C) in the refrigerator section.
- 0°F (-18°C) in the freezer section.

Use


Energy consumption is increased by heat input and impeded air circulation. Therefore, you should:

- Only open the appliance door(s) when necessary and for as short a time as possible. Arrange the food in such a way that makes it easy to find in the appliance.
- Always close the appliance door(s) properly after opening them.
- Allow hot food and drinks to cool down before placing them in the refrigeration appliance.
- Store food well packaged or covered.
- Do not overfill the compartments to allow air to circulate.
- Place frozen food in the refrigerator section to defrost.
- Keep drawers and shelves arranged as they were when the appliance was delivered.

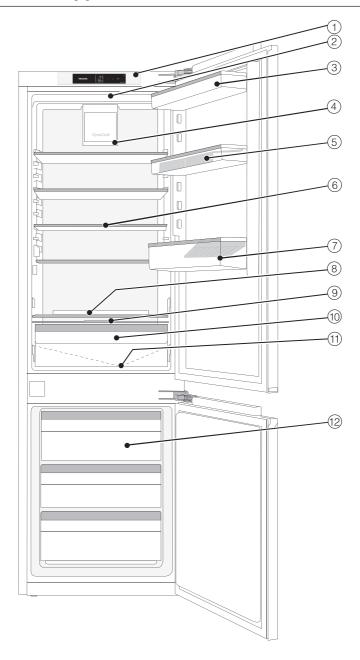

- 1 Display
- 2 Interior lighting
- 3 Door shelves in the appliance door
- 4 Fan
- ⑤ Egg tray
- 6 Adjustable shelf
- 7 Bottle shelf with bottle holder
- ® Space for a baking tray (ComfortSize)
- 9 Compartment lid for setting the humidity level in the DailyFresh drawer
- 10 DailyFresh drawer for fruit and vegetables (humidity-controlled)
- (1) Condensate channel and drain hole
- 12 Freezer drawers

Control panel with status display



- 1 Temperature display for the refrigerator section
- 2 Temperature display for freezer section
- 3 Sensor controls for selecting a setting
- 4 OK sensor control for confirming a selection
- ⑤ Display for Miele@home connection status (only visible when the Miele@home function has been set up)

Settings mode ۞

In Settings mode, you can select the following appliance functions and alter their settings to some extent:

Symbol	Function	Factory default
À	Switching the Party-mode function on or off (see "Selecting additional settings")	Off
<u>-Ö</u> -	Switching the Vacation-mode function on or off (see "Selecting additional settings")	Off
⊕/ਜ਼	Switching the system lock on or off (see "Selecting additional settings")	டி (Off)
Ф	Switching the refrigeration appliance off (see "Switching on and off")	
ÖÖ	Switching the Sabbath-mode function on or off (see "Selecting additional settings")	Off

i	Calling up information on the Sabbath-mode function (see "Selecting additional settings")	
$\mathbb{J}_{\scriptscriptstyle{\oplus}}$	Changing the time before the door alarm is triggered (see "Selecting additional settings")	1:00
@	Setting up the Miele@home function for the first time, activating and deactivating WiFi, or resetting the network configuration (see "Selecting additional settings")	APP
山) / 以	Switching the keypad tone on or off	On
q)) / q/j	Changing the volume of the alarms and audible signals or switch them off entirely (see "Selecting additional settings")	On /level 5
- Ö -	Changing the display brightness (see "Selecting additional settings")	Level 4
°C/°F	Changing the temperature unit (°Celsius or °Fahrenheit)	°C
	Switching the Demo-mode function off (only visible when switched on) (see "Selecting additional settings")	Off
ling	Resetting to default settings (see "Selecting additional settings")	_
i	Calling up information (model identifier and serial number) about your refrigeration appliance (see "Selecting additional settings")	_
	Switching on the reminder to change the carbon filter (see "Optional accessories") (see "Selecting additional settings")	Off
(E)	Switching Cleaning mode on or off (see "Cleaning and care")	Off

Selecting the desired function in Settings mode <a>\$\partial\$\$

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Use the \langle or \rangle sensor control to scroll to the \diamondsuit symbol.
- Touch OK.
- Select the function you want using the < or > sensor control.
- Touch *OK* to select the function you want.

When the function is **switched on**, a dot appears in the upper corner of the display $^{\bullet}$.

■ Touch OK to deselect a selected function.

When the function is **switched off**, the dot in the upper corner of the display goes out.

Exiting Settings mode ③

- Use the < or > sensor control to scroll to the \hookrightarrow symbol.
- Touch OK.
- Use the \langle or \rangle sensor control to scroll to the \hookrightarrow symbol and touch OK.

■ Alternatively:

Wait approx. 15 seconds after the last press of a button. Settings mode is then exited automatically.

Adjusting the interior fittings

Moving the door shelf/bottle shelf

Only move the door/bottle shelves in the appliance door when they are empty.


- Push the door/bottle shelves upward, then remove them by pulling them forward.
- Replace the door/bottle shelves at the required height.

Clipping the egg trays on

■ Clip the egg trays onto the rear edge of the door shelf.

Adjusting or removing the bottle holder

The non-slip fins of the bottle holder make bottles more secure when you open and close the appliance door.




The bottle holder can be moved left or right to create more room for drink cartons.

The bottle holder can be removed completely, e.g., for cleaning:

■ Pull the bottle holder up to remove it.

Moving the adjustable shelves

The shelves can be adjusted according to the height of the food.



- Raise the shelf slightly at the front and pull it forward a little.
- Lift it until the notches at the side are in line with the shelf supports. The shelf can then be raised or lowered to the required level.
- Push the shelf in.


Stops prevent the shelves from being dislodged by mistake.

The raised edge on the protective strip at the back must face upward to prevent food from touching the back of the appliance and freezing to it.

Space for a baking tray

A baking tray can be placed above the drawers. The baking tray can be no more than 18 1/2" wide, 14 1/2" deep, and 2" high (466 mm wide, 386 mm deep, and 50 mm high).

Open the appliance door as far as it will go.



■ Place the baking tray on the dividing plate.

Tip: Let the baking tray cool down to room temperature before putting it in the refrigerator section.

Moving the carbon filter


KKF-FS carbon filters with holder (Active AirClean) are available as optional accessories (see "Optional accessories").

When you are storing very strongsmelling food (e.g., cheese):

- Place the holder with the carbon filters on the adjustable shelf where this food is being kept.
- Change the carbon filters sooner if necessary.
- Use more carbon filters (with holders) in the appliance (see "Optional accessories").

The holder for the carbon filters sits on a protective strip at the back of the adjustable shelf.

- To move the carbon filter, pull the holder up and off the protective strip.
- Then pull the protective strip off the shelf.
- Reinstall it on the shelf you wish to use it on.



■ Reinstall the holder on the protective strip.

Accessories supplied

Egg tray

Bottle holder

Ice cube tray

Optional accessories

A range of useful Miele accessories and care products are available for your appliance.


KKF-FS carbon filter with holder (Active AirClean)

Carbon filters neutralize unpleasant odors in the refrigerator section for improved air quality.

KKF-RF replacement filters (Active AirClean)

Replacement filters to fit the holder are available. We recommend replacing the carbon filters every 6 months.

Bottle rack




Bottles can be stored horizontally using the bottle rack to save space.

The bottle rack can be placed at different positions in the appliance.

Adjustable shelf with pivotable glass shelf (FlexiTray)

The pivotable glass shelf can be turned 180° clockwise, improving access to the food placed at the back.



Organization box

The organization box makes it easier to sort the food in the refrigerator section drawer in a clear manner.

Depending on the model, you may need to remove the entire drawer to insert and remove the organization box.

SoftClose hinges

The SoftClose hinges ensure that your appliance doors close very softly and quietly.

Furthermore, they close the appliance door automatically if the angle of the open door is less than 30°.

Optional accessories can be ordered from the Miele webshop. These products can also be ordered from Miele (see the end of these operating instructions) or your Miele dealer.

Switching on and off

Before using for the first time

- Remove all packaging material and protective film.
- Clean the inside of the appliance and the accessories (see "Cleaning and care").

Connecting the appliance

Connect the refrigeration appliance to the electricity supply as described in "Electrical connection".

Miele will then appear on the appliance display, followed by \bigcirc .

Switching on the appliance

- Open the appliance door.
- Touch the *OK* sensor control on the control panel.

The refrigeration appliance will start to cool and the interior lighting will come on when the appliance door is opened.

When the set freezer temperature is reached, the \P_{\triangle} symbol disappears, the temperature display of the freezer section lights up constantly and the alarm stops.

■ If the alarm annoys you, tap *OK*.

The alarm will stop.

The refrigeration appliance will gradually reach the preset temperatures.

To enable the temperature to get sufficiently cold inside the refrigeration appliance, allow the appliance to run for a few hours. Do not place food in the refrigeration appliance until it has reached the preset temperature.

Do not place food in the freezer section until it has reached the preset temperature (min. 0°F/-18°C).

Switching on and off

Switching off the appliance

You can only switch the entire refrigeration appliance off in Settings mode .

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Use the < or > sensor control to scroll to the ﴿ symbol.
- Touch OK.
- Use the < or > sensor control to scroll to the 🖰 symbol.
- Touch OK.

The cooling and interior lighting are switched off.

(b) will appear on the display.

Please note: the refrigeration appliance is not disconnected from the power supply when it is switched off.

Turning off the refrigerator section separately

The refrigerator section can be switched off without having to switch off the freezer section. This is useful, e.g., while on vacation.

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Touch OK.
- Use the < sensor control to scroll to the () symbol.
- Touch OK.

The temperature display for the refrigerator section will go out. \bigcirc will appear in the display.

The refrigerator section will be turned off.

The temperature display for the freezer section remains lit up.

Switching the refrigerator section back on again separately

- Touch OK.
- will appear in the display (refrigerator section is selected).
- Touch OK.
- Use the > sensor control to scroll to the temperature you want and touch OK.

The refrigerator section switches back on.

Switching off for longer periods of time

If, during a long absence, the refrigeration appliance is switched off but not cleaned and the door is left shut, there is a danger of bacteria building up inside the appliance.

It is essential to clean the refrigeration appliance.

If the refrigeration appliance is not going to be used for a longer period of time, observe the following:

- Turn the appliance off.
- Unplug the appliance's electrical plug or switch off the breaker.
- Clean the refrigeration appliance and leave the door open to air the appliance and avoid odors building up inside.

It is also advisable to carry out the last two instructions if you are switching the refrigerator section off for a longer period of time.

The correct temperature

It is very important to set the correct temperature to ensure the shelf life of food. Reducing the temperature reduces the growth rate of microorganisms. Food does not spoil as quickly.

The temperature in the appliance will rise:

- the more often the appliance door is opened and the longer it is kept open
- the more food that is stored in it
- the warmer the food is that is being put into it
- the higher the ambient temperature surrounding the refrigeration appliance is. This refrigeration appliance is designed for use within specific ambient temperatures (climate range).
 Do not use in ambient temperatures for which it is not designed.

... in the refrigerator section

A temperature of **39°F (4°C)** is recommended in the refrigerator section.

... in the freezer section

To freeze fresh food, a temperature of 0°F (-18°C) is required. This will prolong the storage life of your food and retain its quality.

As soon as the temperature rises above 14°F (-10°C), the bacteria become active in the food again so it cannot be kept as long. For this reason, partially defrosted or defrosted food must not be re-frozen. Food may be re-frozen once it has been cooked (boiled or roasted), as the high temperatures achieved when cooking destroy most bacteria.

The correct temperature

Temperature display

In normal operation, the temperature display shows the current average refrigerator section temperature and the maximum freezer section temperature.

Depending on the ambient temperature and the temperature setting, it can take the appliance a few hours to reach the temperature required and for this temperature to then be shown as a constant temperature on the display.

Setting the temperature in the refrigerator/freezer sections

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Use the < and > sensor controls to change the selected temperature zone if required.
- Touch OK.
- Use the < and > sensor controls to change the temperature.
- Touch OK.

The temperature display will then change back to the current temperature in the relevant temperature zone.

Possible temperature settings

- Refrigerator section: 36 to 48°F (2 to 9°C)
- Freezer section: 5 to 15°F (-15 to -26°C)

If you change the temperature setting:

- Check the temperature display after a few hours. It will take this long for an accurate reading to be given.
- Wait for approx. 6 hours if the refrigeration appliance is not very full.
- Wait for approx. 24 hours if the refrigeration appliance is full.

If, after this time, the temperature is still too high or too low:

Adjust the temperature again.

Using Automatic SuperCool, SuperFrost, and DynaCool

Automatic SuperCool *

When switched on, the Automatic SuperCool function & can be used to rapidly reduce the temperature in the **refrigerator section** to its lowest setting (depending on the ambient temperature). The refrigeration appliance will work at full power and lower the temperature. Select this function for the rapid chilling of large amounts of fresh food or drink.

When the Automatic SuperCool function $\space*$ is switched on, the appliance may make more noise than usual.

The Automatic SuperCool function should be switched on **4 hours before** placing food or drinks in the refrigerator section.

The Automatic SuperCool function www. will switch itself off automatically after approx. 12 hours. The appliance will then run at normal power again.

Tip: To save energy, you can switch the Automatic SuperCool function ❖ off yourself once food and drinks are sufficiently chilled.

Switching Automatic SuperCool * on and off

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Touch OK.
- Use the < sensor control to scroll to the ❖ symbol.
- Touch OK.

When the Automatic SuperCool function $\stackrel{*}{\otimes}$ is **switched on**, a dot appears in the upper corner of the display •.

Use the > sensor control to scroll to the temperature you want and touch OK.

Using Automatic SuperCool, SuperFrost, and DynaCool

SuperFreeze *

When switched on, the SuperFreeze function & can be used to rapidly reduce the temperature in the freezer section to its lowest setting (depending on the ambient temperature). The refrigeration appliance will work at full power and lower the temperature. Select this function before freezing fresh food. Fresh food will be frozen quickly, so that the nutritional value, vitamin content, appearance, and taste are maintained.

When the SuperFreeze function $\mbox{\ensuremath{\belowdex}}$ is switched on, the appliance may make more noise than usual.

SuperFreeze should be switched on approx. **6 hours before** placing food in the freezer section.

When freezing the maximum amount of food, the SuperFreeze function should be switched on 24 hours beforehand.

The SuperFreeze function wwill switch itself off automatically after a maximum of 72 hours. The appliance will then run at normal power again. The exact amount of time will vary according to how much fresh food is placed in the freezer.

Tip: To save energy, you can switch the SuperFreeze function off yourself once food and drinks are sufficiently chilled.

You do not need to switch on the SuperFreeze function:

- When you place food that is already frozen in the freezer.
- If you are only freezing up to 4.4 lb (2 kg) of fresh food daily.

Switching SuperFrost * on and off

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Use the > sensor control to scroll to the □ symbol.
- Touch OK.
- Use the < sensor control to scroll to the ⇔ symbol.
- Touch OK.

When the SuperFrost function \$\pi\$ is **switched on**, a dot appears in the upper right-hand corner of the display •.

■ Use the < and > sensor controls to scroll to the temperature you want and touch OK.

Using Automatic SuperCool, SuperFrost, and DynaCool

DynaCool 🙏

When the DynaCool function & is not switched on, the natural circulation of air in the appliance will cause different temperature zones in the refrigerator section, as the cold, heavy air will sink to the lowest section of the appliance. You should keep this in mind when placing food in the appliance (see "Storing food in the refrigerator section").

However, if you are storing a large amount of similar food in the refrigerator at any one time, e.g., after your weekly shop, it is a good idea to turn on DynaCool. This way you can distribute the temperature more evenly across all the shelves so that all the food in the refrigerator section will be chilled to about the same degree. The temperature can still be set.

Also switch on the DynaCool function & when:

- The ambient temperature is high (above approx. 85°F/30°C)
- The humidity levels are high (e.g., in the summer)

The fan will always switch on automatically when the compressor switches on.

Tip: As the energy consumption increases when DynaCool & is switched on, you should turn the DynaCool function & off again under normal conditions.

To save energy, the fan turns off automatically while the door is open.

- Touch the *OK* sensor control on the control panel.
- will appear in the display (refrigerator section is selected).
- Touch OK.
- Use the < sensor control to scroll to the 👃 symbol.
- Touch OK.

When the DynaCool function & is **switched on**, a dot appears in the upper corner of the display $^{\bullet}$.

■ Use the > sensor control to scroll to the temperature you want and touch *OK*.

Explanation of the different settings

Only the settings that require further explanation are described below.

The door alarm and other warnings are automatically suppressed when you are in Settings mode \ô.

Party mode 9

The Party-mode function \P is recommended if you wish to chill or freeze large amounts of fresh food or drink quickly.

Tip: Switch on the Party-mode function \P approx. 4 hours before placing food and drinks in the appliance.

When Party mode

is switched on, the DynaCool

A, Automatic SuperCool, and SuperFrost

in functions are switched on automatically.

Party mode \P cannot be switched on if the refrigerator section is switched off or if Vacation mode \circlearrowleft is switched on.

The Party-mode function \P will switch itself off automatically after approx. 24 hours. However, you can switch the Party-mode function \P off early at any time.

Vacation mode 🌣

The Vacation-mode function is is useful when you go on vacation, for example, if you do not wish to switch off the refrigerator section completely or do not need a high degree of cooling.

If Vacation mode 🔅 is switched on, this will be indicated on the status display.

The refrigerator section is regulated to a temperature of 60°F (15°C), thus remaining in operation while saving energy.

The freezer section remains switched on at the previously set temperature.

Food which does not spoil quickly can be stored in the refrigeration appliance for some time at this moderate refrigerator temperature. Energy consumption is lower than in normal operation. This also prevents the build-up of odors and bacteria which can occur if the refrigerator section is switched off and the appliance door is closed.

Health risk caused by decomposing food.

The usability and quality of food in the refrigerator section may deteriorate if the temperature remains above 37°F (4°C) for an extended period. Only ever switch on the Vacation-mode function of for a limited period.

Do not store any temperature-sensitive food which spoils easily, such as fruit, vegetables, fish, meat, and dairy products, during this time.

When the safety-lock function $\widehat{\Box}$ is switched on, it protects the refrigeration appliance from being switched off unintentionally and being adjusted unintentionally by unauthorized persons, e.g., children

- In Settings mode ۞, use the < or > sensor control to scroll to the ☐ symbol.
- Touch OK.

When the safety-lock function $\widehat{\Box}$ is switched on, a dot appears in the upper corner of the display \bullet .

■ Close the appliance door. The safety-lock function will now be activated.

Deactivating the safety-lock function ⊕/⊕ temporarily

If you want to adjust the temperature, for example, you can deactivate the safety-lock function temporarily:

■ Touch OK.

multiple will appear in the display.

- Touch the OK sensor control for approx. 6 seconds.
- will appear in the display (refrigerator section is selected).
- Use the < and > sensor controls to change the selected temperature zone if required.
- Touch OK.
- Now select the required settings.
- Touch OK.

Closing the appliance door will reactivate the safety-lock function \bigcirc .

Switching the safety-lock function ⊕/ ⊕ off completely

■ Touch OK.

display.

- Touch the OK sensor control for approx. 6 seconds.
- will appear in the display (refrigerator section is selected).
- Use the < or > sensor control to scroll to the ﴿ symbol.
- Touch OK.
- Use the < or > sensor control to scroll to the ⊕ symbol.
- Touch OK.

When the safety-lock function is switched off, \Box appears in the display.

Sabbath mode iii

The appliance features a Sabbath mode for the purposes of religious observance.

If Sabbath mode iii is switched on, this will be indicated on the status display.

The display switches off after 3 seconds.

When Sabbath mode ii is switched on, you cannot make any settings on your refrigeration appliance.

Ensure that the appliance doors are properly closed, as audible and visual alarms are turned off.

The Sabbath-mode function in will switch off automatically after approx. 120 hours.

When Sabbath mode iii is switched on, the following are deactivated:

- the interior lighting when the appliance door is opened
- all audible and visual signals
- temperature display

All other functions switched on previously remain activated.

Health risk caused by decomposing food.

As power failures are not indicated while Sabbath mode iii is active, food may be exposed to increased temperatures for a certain period of time. This will reduce the storage life of the food.

If there is a power failure during Sabbath mode iii, check the quality of the food.

Switching Sabbath mode iii on

- In Settings mode ô, use the < or > sensor control to scroll to the ii symbol.
- Touch OK.

When the Sabbath-mode function iii is switched on, a dot appears in the upper corner of the display •.

The display switches off after 3 seconds.

■ Close the appliance door.

Switching Sabbath mode iii off

■ Touch the *OK* sensor control.

ii will appear in the display.

■ Touch OK.

When the Sabbath-mode function iii is switched on, a dot appears in the upper corner of the display •.

■ Touch OK.

When the Sabbath-mode function ii is switched off, the dot in the upper corner of the display goes out.

Information on Sabbath mode i

This product is certified by Star-K, an international institute for kosher certification.

You can find the Star-K certification version here.

Changing the time before the door alarm $\mathbb{Q}_{\mathbb{Q}}$ is triggered

You can set how quickly the door alarm should sound after an appliance door has been opened.

- Touch OK.
- Use the < and > sensor controls to set the time you want between 30 seconds and 3 minutes: 30 seconds.
- Touch OK.

Miele@home

Your refrigeration appliance is equipped with an integrated WiFi module.

Networking is deactivated at the factory.

To use this feature, you will need:

- a WiFi network
- the Miele app
- a Miele user account You can create a user account via the Miele app.

The Miele app will guide you as you connect your refrigeration appliance to your home WiFi network.

Once the refrigeration appliance is connected to your WiFi network, you can use the app to carry out the following activities, for example:

- Call up information on the operating status of your refrigeration appliance.
- Change the settings on your refrigeration appliance.

Connecting your refrigeration appliance to your WiFi network will increase energy consumption, even when the appliance is switched off.

Make sure that the signal of your WiFi network is sufficiently strong in the place where you want to set up your refrigeration appliance.

Availability of the WiFi connection

The WiFi connection shares a frequency range with other appliances (including microwave ovens and remote control toys). This can cause sporadic or even complete connection failures. Therefore, the availability of featured functions cannot be guaranteed.

Miele@home availability

The ability to use the Miele app depends on the availability of the Miele@home service in your country.

The Miele@home service is not available in every country.

For information about availability, please visit www.miele.com.

Miele App

The Miele App is available to download free of charge from the Apple App Store[®] or from the Google Play Store[™].



Setting up Miele@home for the first time

- In Settings mode ۞, use the < or > sensor control to scroll to the @ symbol.
- Touch OK.
- Use the < and > sensor controls to select the connection method you wish to use (app or WPS).
- Touch OK.

After you have successfully logged in, will appear on the status display.

If a connection could not be created, \otimes will appear.

Start the process again.

Deactivating or activating the WiFi connection

- In Settings mode ۞, use the < or > sensor control to scroll to the @ symbol.
- Touch OK.

If the WiFi is deactivated, the ** symbol will appear in the display.

■ To reactivate the WiFi connection, touch *OK*.

If the WiFi is activated, the \Re symbol and a dot appear in the upper corner of the display $^{\bullet}$.

When the WiFi connection is active, the symbol appears in the status display.

Resetting the network configuration

- In Settings mode ô, use the < or > sensor control to scroll to the ② symbol.
- Touch OK.
- Use the > sensor control to scroll to the ② symbol.
- Touch OK.
- Use the > sensor control to scroll to the × symbol.
- Touch OK.

All entered settings and values for Miele@home are reset to the default settings.

Reset the network configuration if you are disposing of or selling your refrigeration appliance, or if you are putting a used refrigeration appliance into operation. All personal data is removed from the refrigeration appliance. This will also ensure that a previous owner is no longer able to access the refrigeration appliance.

Changing the volume of the alarms and audible signals ◁》/烎》

You can change the volume of the alarms and audible signals (e.g., in the event of a door alarm or a fault message). Alternatively, you can switch the alarms and audible signals off if you find them annoying.

- In Settings mode ۞, use the < or > sensor control to scroll to the ◁) symbol.
- Touch OK.
- Use the < and > sensor controls to select the volume you want for alarms and audible signals.
- Touch OK.

When the alarms and audible signals are switched off, (4) will appear.

Adjusting the display brightness 🌣

You can adjust the display brightness to the lighting conditions in the room.

- In Settings mode ۞, use the < or > sensor control to scroll to the ᠅ symbol.
- Touch OK.
- Use the < and > sensor controls to select the display brightness you want.
- Touch OK.

Switching off Demo mode

Demo mode allows the refrigeration appliance to be presented in the dealer showroom without the cooling system being switched on. Do not activate this setting for domestic use.

If Demo mode has been switched on as a default setting, | will show on the display when the refrigeration appliance is switched on.

■ Touch the *OK* sensor control on the control panel.

Miele will appear initially in the display, followed by the start screen.

- Touch OK.
- In Settings mode ∅, use the < or
 > sensor control to scroll to the
 I symbol.
- Touch OK.

Resetting the settings to their factory default settings [147]

All settings made on the refrigeration appliance will be reset to the factory default settings (for settings, see "Guide to the appliance").

- In Settings mode ۞, use the < or</p> > sensor control to scroll to the Symbol.
- Touch OK.
- Use the > sensor control to scroll to the symbol.
- Touch OK.

The refrigeration appliance shuts down and must be switched on again.

Information i

Appliance data (model identifier and serial number) is shown on the display.

Tip: This data is important when reporting an appliance fault to Miele Customer Service (see "Customer Service").

Carbon-filter change indicator



After inserting the carbon filter (optional accessory), you must activate the carbon-filter change indicator (in Settinas mode 3.

The carbon-filter change indicator 🏶 on the status display will remind you to replace the carbon filter approx. every 6 months (see "Cleaning and care Replacing the carbon filters").

Cleaning mode &

Cleaning mode @ makes it easier to clean the refrigerator section (see "Cleaning and care"). The interior lighting remains switched on, even though the refrigerator section is switched off. The audible signal will stop and the symbols on the display will also go out.

If Cleaning mode (is switched on, this will be indicated on the status display.

After cleaning, Cleaning mode @ must be switched off. If the appliance door is closed for more than 10 minutes, Cleaning mode (switches itself off automatically.

Temperature and door alarm

Health risk caused by decomposing food.

If the temperature in the freezer remains above 0°F (-18°C) for a long time, the frozen food may start to defrost. This will reduce the storage life of the food.

Check whether the frozen food has started to defrost. If it has, use the food as soon as possible or cook it before freezing it again.

Temperature alarm

The refrigeration appliance has been equipped with a warning system so that the temperature in the freezer section cannot rise unnoticed.

If the temperature in the freezer section becomes too warm, \P_{\triangle} will light up red in the freezer-section temperature display.

An alarm will also sound until the cause of the alarm is rectified or the alarm is switched off.

The temperature the appliance is set at determines the temperature the appliance recognizes as being too warm.

A temperature alarm is displayed before an existing door alarm.

The audible and visual signals may be activated in the following situations:

- You switch on the refrigeration appliance and the temperature in a temperature zone differs greatly from the set temperature.
- A lot of warm room air enters the freezer section when you are rearranging or taking out frozen food.
- You are freezing large amounts of food at once.
- You are freezing warm food.
- There was a power failure.
- The refrigeration appliance has a fault.

Before you switch the temperature alarm off, you must determine the cause and rectify it.

If the alarm disturbs you, it can be turned off early.

■ Touch OK.

The start screen appears in the display: the warmest temperature recorded in the freezer section will flash for about 1 minute in the display. Then the temperature display will change to the current temperature in the freezer section.

The alarm will stop. The \P_{\triangle} symbol will go out when the temperature reaches the correct level again.

Temperature and door alarm

Door alarm

The refrigeration appliance is equipped with a warning system to avoid increased energy consumption and food becoming warm if the appliance door is left open.

If an appliance door is left open for a longer period of time, \mathbb{I}_{\triangle} will appear on the relevant temperature display. An alarm will also sound.

You can change the time before the door alarm is triggered. However, the door alarm can also be turned off (see "Selecting additional settings").

The alarm will stop and \square_{\triangle} will go out on the display as soon as the door is closed.

Turning the door alarm off early

If the alarm disturbs you, it can be turned off early.

■ Touch OK.

The alarm tone will stop and the $\mathbb{I}_{\mathbb{A}}$ symbol will go out.

If the appliance door is not closed, the alarm will sound again after 3 minutes.

Storing food in the refrigerator section

Do not load more than a maximum of 35 lb (16 kg) of food in the appliance door.

A Risk of fire from electrical appliances.

Operating electrical devices in the appliance can cause sparks to form. Do not operate any electrical devices inside the appliance.

Pisk of explosion due to flammable mixes of gases.

Electrical components can cause

flammable mixes of gases to ignite. Do not store any explosive materials or products containing flammable propellants (e.g., spray cans) in the appliance. The spray cans in question can be identified by the contents printed on the can or by a flame symbol. Electrical components can cause escaping gases to ignite.

A Risk of damage due to greasy or oily foods.

If storing food which contains a lot of fat or oil in the refrigeration appliance or the appliance door, make sure that it does not come into contact with plastic components as this could cause stress cracks or break the plastic.

Make sure that no fat or oil leaks onto the plastic parts of the refrigeration appliance. If there is insufficient air circulation, the cooling performance will decrease and energy consumption will increase.

To allow air to circulate efficiently, do not pack food too closely together in the appliance.

Do not cover the fan in the rear wall of the appliance.

Storing food in the refrigerator section

Different storage zones

Due to natural air circulation, there are different temperature zones in the refrigerator section.

Cold, heavy air sinks to the lowest section of the refrigeration section. Make use of the different zones when placing food in the appliance.

This machine has DynaCool, which helps to keep an even temperature when the fan is running. The difference between the various temperature zones is therefore less pronounced.

Warmest area

The warmest area in the refrigerator section is in the top section of the door. Use this for storing butter so that it remains spreadable and cheese so that it retains its flavor.

Coldest area

The coldest area in the refrigerator section is directly above the DailyFresh drawer and at the back of the appliance.

Use these areas to store all delicate and highly perishable food, such as:

- fish, meat, poultry
- cold cuts, ready-made meals
- dishes or baked goods containing eggs or cream
- fresh dough, cake mixtures, pizza dough, or pie dough
- raw-milk cheese and other raw-milk products
- pre-packed vegetables
- other fresh food (with a label stating it should be kept at a temperature of approx. 39°F/4°C)

Tip: Store food in such a way that it does not touch the rear wall of the refrigerator section. Otherwise it could freeze to the rear wall.

Storing food in the refrigerator section

Food which is not suitable for storage in the fridge zone

Not all food is suitable for refrigeration at temperatures below 40°F (5°C) because it is sensitive to cold.

Foods which are sensitive to cold include:

- pineapples, avocados, bananas, pomegranates, mangoes, melons, papayas, passion fruit, citrus fruits such as lemons, oranges, mandarins, grapefruits
- fruit (which is not yet ripe)
- eggplant, cucumbers, potatoes, peppers, tomatoes, zucchini
- hard cheeses (e.g., Parmesan)

Notes on buying food

The freshness of the food when it is first placed in the appliance is the most important factor for how long it stays fresh.

Take into account the use-by date and the correct storage temperature.

Time out of the fridge, e.g., transporting food in a warm car, should be kept to a minimum

Storing food correctly

Ensure that food stored in the refrigerator section is in packaging or covered properly (some exceptions apply in the DailyFresh drawer). This will prevent food odors from affecting other food, stop food from drying out, and also prevent any cross-contamination of bacteria. This is particularly important when storing meat products. Make sure that food such as raw meat and fish in particular does not come into contact with other food.

By ensuring that the temperature settings are correct and by taking appropriate hygiene measures, you can prolong the storage life of your food considerably. This prevents food waste.

Protein-rich food

Please note that foods rich in protein deteriorate faster than others. Shellfish, for example, deteriorates faster than fish, and fish deteriorates faster than meat.

Storing food in the DailyFresh drawer

The DailyFresh drawer provides good storage conditions for fruit and vegetables.

The humidity level in the DailyFresh drawer can also be regulated to suit the food being stored. Food retains its own moisture if stored at a higher humidity and so does not dry out as quickly. The temperature is approximately equivalent to the temperature in the conventional refrigerator section.

Remember that the fresher the food when it is placed in the appliance, the longer it will stay fresh.

Adjusting the humidity level in the DailyFresh drawer for fruit and vegetables


The moisture level greatly depends on the type and quantity of food being stored, if stored unwrapped. If the quantity of food being stored in this compartment is small, the humidity level may be too low.

Tip: If you are only storing a small amount of food, wrap it in airtight packaging.

Selecting low humidity δ

By default, the humidity is increased and the compartment cover pushed backwards ۵۵۵.


Only change this default setting if the humidity level in the DailyFresh drawer is too high:



■ Pull the compartment lid forward as far as it will go.

The compartment lid is open and the humidity drops δ .

Selecting increased humidity ১১১



■ Slide the compartment lid backward as far as it will go.

The compartment lid is closed and the humidity remains in the compartment $\delta\delta\delta$.

Storing food in the DailyFresh drawer

Observe the following tips if you find that food you have stored does not keep well (e.g., food becomes limp or wilts after only being stored for a short time):

- Only place fresh food in the appliance as the initial condition of the food is crucial to maintaining freshness.
- Clean the DailyFresh drawer before storing food in it.
- Very wet food should be dried off before storing it.
- Do not store food which is sensitive to cold in the DailyFresh drawer (see "Storing food in the refrigerator section Food which is not suitable for storage in the refrigerator section").
- Set the compartment cover to the correct position for the food being stored (humidity not increased ۵ or humidity increased ۵۵۵).
- An increased humidity level ۵۵۵ in the humidity-controlled compartment is achieved with the moisture present in the food being stored if it is stored unwrapped. The more food stored in the compartment, the higher the humidity.
- If too much moisture collects in the compartment at the δδδ setting and the food is affected, dry the floor and place a rack or similar item in the compartment so that excess moisture can drip down. Alternatively, reduce the humidity δ by pulling the compartment cover forwards.
- If the humidity level is too low despite the ১১১ setting, wrap the food in airtight packaging.

Freezing and storing food

Always observe USDA food safety guidelines.

A Risk of fire from electrical appliances.

Operating electrical devices in the appliance can cause sparks to form. Do not operate any electrical devices inside the appliance.

What happens when you freeze fresh food?

Health risk caused by decomposing food.

If the temperature in the freezer remains above 0°F (-18°C) for a long time, the frozen food may start to defrost. This will reduce the storage life of the food.

Check whether the frozen food has started to defrost. If it has, use the food as soon as possible or cook it before freezing it again.

Fresh food should be frozen as quickly as possible so that the nutritional value of the food, its vitamin content, appearance, and flavor are maintained.

If food is frozen quickly, the cells have less time to lose moisture, so they shrink significantly less. As there is not so much moisture loss, it is easier for the food to reabsorb it during the defrosting process, and very little water collects around the defrosted food.

Maximum freezing capacity

To ensure that fresh food placed in the freezer freezes through to the core as quickly as possible,

the maximum freezing capacity must not be exceeded. The maximum freezing capacity for freezing within a 24hour period is given on the data plate: "Freezing capacity ... lbs/24 hrs".

Storing frozen food

When buying frozen food to store in your freezer, make sure to check:

- that the packaging is not damaged
- the expiration date
- that the temperature at which the frozen food is being stored in the shop is 0°F (-18°C) or colder
- Where possible, transport frozen food in an insulated bag and then store it quickly in the refrigeration appliance.

Freezing and storing food

Home freezing

Before placing food in the freezer

- When freezing more than 4.4 lb (2 kg) of fresh food, switch on the Super-Freeze function ☆ for 6 hours before placing the food in the freezer.
- When freezing even larger amounts of food, switch on the SuperFreeze function ☆ for 24 hours before placing the food in the freezer.

This helps frozen food which is already stored in the freezer to stay frozen.

Only freeze food that is fresh and in good condition.

Please note that some food is not suitable for freezing. These include, for example, vegetables that are usually eaten raw, such as lettuce or radishes.

Tip: To retain color, taste, aroma, and vitamin C, vegetables should be blanched before they are frozen. To do so, place them portion by portion into boiling water for 2–3 minutes. Then, remove and plunge the vegetables into ice-cold water to cool quickly. Leave the vegetables to drain.

Packaging food for freezing

■ Freeze food in portions.

Tip: Use suitable packaging to avoid freezer burn (such as freezer containers).

- Expel as much air as possible from the packaging and close it tightly.
- Label the packaging with the contents and the date of freezing.

Placing food in the freezer

Risk of damage due to heavy loads.

Loading food which is too heavy can cause damage to the freezer drawers/glass shelves.

Do not exceed the relevant maximum load:

Freezer drawer = 26 lb (12 kg) Glass shelf = 77 lb (35 kg)

Unfrozen food should not touch frozen food as this will cause the frozen food to begin to thaw.

■ To prevent food sticking together when frozen, make sure that the packaging and containers are dry.

To ensure that food freezes through to the core quickly, do not exceed the following packaging and container sizes:

- fruit and vegetables: max. 2.2 lb (1 kg)
- meat: max. 5.5 lb (2.5 kg)

- Freezing small amounts of food

Place the food in the upper freezer drawers.

Freezing and storing food

Place the food flat in the bottom of the upper freezer drawers so that it freezes through to the core as quickly as possible.

- Freezing the maximum amount of food (see data plate)

If the ventilation slots are obstructed, the cooling performance will decrease and energy consumption will increase.

When placing food in the freezer, make sure that the ventilation slots are not blocked.

Tip: You can expand the space available in the freezer section. If you wish to freeze large items, such as turkey or game, you can remove the glass plates between the freezer drawers.

- Remove the upper freezer drawers.
- Place the food flat on the upper glass plates so that it freezes through to the middle as quickly as possible.

Once the food has frozen:

- Switch the SuperFreeze function ft.
- Place the frozen food in the freezer drawers and push them back in.

Storage time for frozen food

Food group	Storage time (Months)
Ice cream	2 to 6
Bread, baked goods	2 to 6
Cheese	2 to 4
Fish, oily	1 to 2
Fish, lean	1 to 5
Sausage, ham	1 to 3
Game, pork	1 to 12
Poultry, beef	2 to 10
Vegetables, fruit	6 to 18
Herbs	6 to 10

The storage times given are guidelines only.

Where the storage time given on the packaging differs, follow the advice on the packaging.

By keeping the freezer section at a constant temperature of 0°F (-18°C) and taking appropriate hygiene measures you can maximize the storage life of your food and avoid food waste.

Cooling drinks quickly

To cool drinks quickly in the refrigerator section, switch on the Automatic SuperCool function ஓ.

If you want to cool a large amount of drinks, or if you want to cool drinks in the freezer section, select Party mode \S in Settings mode \S .

When cooling drinks quickly in the freezer, make sure bottles are not left in for **more than one hour**. Otherwise they could burst.

Using accessories

Making ice cubes

- Fill the ice cube tray 3/4 full with water and place it on the bottom of one of the freezer drawers.
- Once frozen, use a blunt instrument such as a spoon handle to remove the ice cube tray from the freezer if it is stuck.

Tip: Ice cubes can be removed easily from the tray by holding it under running water for a short time.

Defrosting

Do not use any mechanical or other types of aids which are not recommended by the manufacturer to accelerate the defrosting process.

Refrigerator section and DailyFresh drawer

The refrigerator section and the DailyFresh drawer defrost automatically.

Condensate and frost can build up on the back wall of the refrigerator section when the compressor is running. You do not need to remove this.

The condensate drains through a channel and drain hole into an evaporation system at the back of the refrigeration appliance. The warmth generated by the compressor causes the condensate to evaporate automatically.

Keep the condensate channel and drain hole clean to enable this. The condensate must always be able to drain properly.

Freezer section

The appliance is equipped with a "NoFrost" system. The freezer defrosts automatically.

The moisture generated in the appliance collects on the condenser and is automatically defrosted and evaporates periodically.

This automatic defrosting system enables the Freezer Zone to remain permanently ice-free. However, the food stored in the freezer will not defrost.

Cleaning and care

Unplug the appliance or trip the circuit breaker.

MARNING! Fire hazard! Do not damage the coolant pipework.

The data plate located inside the interior cabinet of the refrigeration appliance must not be removed. It contains information which is required in the event of a service call.

Do not let water get into the electronic or the lighting.

A Risk of damage due to moisture penetration.

The steam from a steam cleaner can damage plastic and electrical components.

Do not use a steam cleaner to clean the refrigeration appliance.

Cleaning water must not get into the drain hole.

Cleaning agents

Cleaning and care products used in the interior cabinet of the refrigeration appliance must be food safe.

To avoid damaging the surfaces of your appliance, **do not** use the following:

- cleaning agents containing soda, ammonia, acids, or chloride
- cleaning agents containing limescale remover
- abrasive cleaning agents, such as scouring powder, scouring liquid, or pumice stones
- cleaning agents containing solvents
- stainless steel cleaners
- dishwasher cleaning agents
- oven sprays
- glass cleaners
- hard, abrasive sponges and brushes, such as pot scrubbers
- eraser sponges
- sharp metal scrapers

We recommend using a clean sponge, lukewarm water with a little liquid dish soap to clean the surfaces of the appliance.

Cleaning and care

Preparing the refrigeration appliance for cleaning

Cleaning the refrigerator section only:

Switch Cleaning mode (on. The cooling system in the refrigerator section is switched off, but the interior lighting remains switched on.

- Touch OK.

When Cleaning mode (is switched on, a dot appears in the upper corner of the display .

If Cleaning mode & is switched on, this will be indicated on the status display.

- Take any food out of the refrigerator section and store it in a cool place.
- Take out any removable accessories for cleaning (see "Removing, dismantling, and cleaning accessories").

Cleaning the freezer section/the entire refrigeration appliance:

■ Turn the appliance off.

(b) appears in the display and the cooling system is switched off.

- Take any food out of the freezer section/refrigeration appliance and store it in a cool place.
- Take out any removable accessories for cleaning (see "Removing, dismantling, and cleaning accessories").

Cleaning the interior of the appliance

Clean the appliance regularly, or at least once a month.

If soiling is left on for any length of time, it may become impossible to remove under certain circumstances. Surfaces may become discolored or damaged.

It is therefore best to remove any soiling immediately.

- Clean the interior with a clean sponge, lukewarm water, and a little liquid dish soap.
- After cleaning, wipe with clean water and dry with a soft cloth.
- Clean the condensate channel and drain hole frequently using a cotton swab or similar item to ensure that condensate can drain away freely.
- Leave the door open to air the refrigeration appliance sufficiently for a short while and to prevent odor buildup.

Cleaning accessories by hand or in the dishwasher

The following components must be cleaned **by hand** only:

- the stainless-steel trim
- adjustable shelf with printing
- the flexible bottle rack (available as an optional accessory)
- all drawers and compartment lids (these vary depending on model)
- the plastic parts of the adjustable shelf with pivotable glass shelf (available as optional accessory)
- organization box (available as an optional accessory)

The following components are **dish-washer-safe**:

Risk of damage due to high dishwasher temperatures.

Parts of the refrigeration appliance may become unusable, e.g., deform, if they are washed in the dishwasher at more than 130°F (55°C).

For dishwasher-safe components, always select dishwasher programs with a maximum temperature of 130°F (55°C).

Contact with natural dyes from carrots, tomatoes, and ketchup, etc., may discolor the plastic parts in the dishwasher. This discoloration does not affect the stability of the parts.

the bottle holder, egg tray, ice cube tray

Cleaning and care

- the door and bottle shelves in the appliance door (without stainless-steel trim)
- the adjustable shelves (without the strips or printing)
- the glass shelves (without trim)
- the holder for the carbon filter (available as an optional accessory)

Removing, dismantling, and cleaning accessories

Dismantling the door shelf/bottle shelf

Remove the stainless-steel trim before cleaning the door shelf/bottle shelf in the dishwasher.


To remove the stainless-steel trim, proceed as follows:

- Place the door shelf/bottle shelf on the countertop.
- Pull the trim off the shelf beginning at one side.
- After cleaning the door shelf/bottle shelf, reattach the trim.

Dismantling an adjustable shelf


Remove the trim before cleaning the adjustable shelf. Proceed as follows:

Place the shelf on a countertop covered with a soft material (e.g., a dish towel).




- Pull the trim off the shelf beginning at one side.
- After cleaning the shelf, reattach the trim.

Removing a drawer



■ Lift the drawer at the front and pull it out.

Removing the compartment lid



- Lift the lid at the front and pull it out.
- After cleaning, slide the compartment lid back in again.

Cleaning and care

Removing the drawers and glass shelves from the freezer section

Removing a drawer

Lift the drawer at the front and pull it out.

Removing a glass shelf

Pull the glass shelf out.


Replacing the carbon filters (optional accessories)

Replace the carbon filters in the holder around every 6 months.


The symbol on the status display reminds you that the carbon filter needs to be changed.

Replacement KKF-RF carbon filters can be obtained from Miele Customer Service, from your dealer, or from Miele's website.

Pull the carbon filter holder upward to remove it from the adjustable shelf.



Remove both carbon filters and place the new filters with the surrounding edge pointing downward in the holder.



- Place the holder in the middle of the protective strip at the back of the adjustable shelf so that it clicks into position.
- Touch the OK sensor control to confirm that the filters have been replaced.

The "Replace carbon filter" reminder will go out on the display and the counter will be reset.

The symbol will go out on the status display.

Cleaning and care

Cleaning the door seal

Risk of damage as a result of incorrect cleaning.

If you treat the door seal with oil or grease, it can become porous.

Do not use oil or grease on the door seal.

The door seals should be cleaned regularly with clean water, and then wiped dry with a soft cloth.

Cleaning the ventilation gaps

A build-up of dust will increase the energy consumption of the appliance.

■ The ventilation gaps should be cleaned on a regular basis with a brush or vacuum cleaner (you could use a Miele Vacuum Cleaner dust brush, for example).

After cleaning

- Replace all shelves and accessories in the appliance.
- Switch the refrigeration appliance back on, if necessary.
- If you have activated the refrigerator section's Cleaning mode ②:

 Touch the OK sensor control on the control panel.

will appear in the display.

■ Touch OK.

When Cleaning mode & is switched off, the dot in the upper corner of the display disappears.

■ Use the < and > sensor controls to scroll to the Symbol and touch OK.

The refrigerator section will start cooling again.

- Switch the SuperFrost ☆ function on for a while so that the freezer section can cool down quickly.
- Switch on the Automatic SuperCool function ☆ for a while so that the refrigerator section can cool down quickly.
- Place food in the refrigerator section.
- Once the temperature in the freezer section is cold enough, you can place the food in the freezer drawers and return the drawers to the freezer.
- Switch off the SuperFrost ※ function as soon as the temperature in the freezer section is a constant 0°F (-18°C) or colder.
- Close the appliance doors.

With the help of the following guide minor faults in the performance of the machine, some of which may result from incorrect operation, can be remedied without contacting the Service Department.

This guide may help you to find the reason for the fault, and how to correct it.

To prevent cold from escaping, open the appliance doors as little as possible until the fault has been corrected.

Problem	Possible cause and solution
The refrigeration appliance is not getting cold and the interior lighting does not come on when the appliance door is opened.	The refrigeration appliance is not switched on and the ⊕ symbol is lit up on the display. ■ Turn the refrigeration appliance on.
	The electrical plug is not properly plugged into the socket. ■ Insert the electrical plug into the socket. If the refrigeration appliance is switched off, () will appear on the display.
	The fuse has tripped. There could be a fault with the appliance, the household electrical wiring, or another appliance. Contact a qualified electrician or Miele Customer Service.
The compressor runs continuously.	Not a fault. To save energy, the compressor runs at a lower speed when less cooling is required. This increases the compressor run time.
The compressor is turning on more frequently and for longer periods of time; the temperature in the refrigeration appliance is too low.	 The ventilation gaps are obstructed or dusty. Do not block the ventilation gaps. Clean the ventilation gaps on a regular basis to remove any dust.
	The appliance doors have been opened too frequently or a large amount of fresh food has been put in all at once for storage or freezing. Only open the appliance doors when necessary and for as short a time as possible.
	After a while, the temperature will return to normal by itself.
	The appliance doors are not closed properly. A thick layer of ice may have already formed in the freezer section.

Problem	Possible cause and solution
	■ Close the appliance doors.
	After a while, the temperature will return to normal by itself.
	If a thick layer of ice has already formed, this will affect cooling and increase energy consumption. Defrost the appliance and clean it.
	The ambient temperature is too high. The higher the ambient temperature, the longer the compressor runs. See the information in the section on "Installation –
	Installation location".
	The appliance was not properly installed in the niche. ■ Install the refrigeration appliance in the niche as described in the installation instructions supplied with it.
	The temperature setting in the refrigeration appliance is too low. Correct the temperature setting.
	A large amount of food was put in for freezing all at once.
	See the information in the section on "Freezing and storing food".
	The Automatic SuperCool ☆ function is still turned on.
	■ Switch off the Automatic SuperCool function ❖ earlier to save energy.
	The SuperFreeze function ❖ is still switched on. ■ Switch off the SuperFreeze function ❖ earlier to save energy.

Problem	Possible cause and solution
The compressor comes on less and less often and for shorter periods of time. The temperature in the appliance rises.	This is not a fault. The temperature setting is too high. ■ Correct the temperature setting. ■ Check the temperature again after 24 hours. The food begins to thaw. The ambient temperature is too low for this appliance. If the ambient temperature is too low, the compressor will run less frequently. This may cause the freezer to become too warm. ■ See the information in the section on "Installation – Installation location". ■ Increase the ambient temperature.
Ice or condensation has built up inside the re- frigeration appliance. The appliance door may not close correctly.	 The door seal has come out of its groove. Check that the door seal is correctly positioned in the groove. The door seal is damaged. Check whether the door seal is damaged.
The door seal is damaged or needs to be replaced.	No tools are required to change the door seal. Change the door seal. A replacement is available from Technical Service.

Other problems

Problem	Possible cause and solution
The floor of the refrigerator section is wet.	The drain hole is blocked. Clean the condensate channel and the drain hole.
Food has frozen to- gether or to the wall.	The food packaging was not dry when loaded in the freezer. Use a blunt instrument (such as a spoon handle) to carefully pry them apart.
An alarm does not sound even though the appliance door has been open for a long time.	This is not a fault. The alarm has been switched off in Settings mode. If you want to switch the acoustic alarm back on again: ■ In Settings mode ②, use the < or > sensor control to scroll to the ④) symbol. ■ Touch OK. ■ Use the < and > sensor controls to select the volume you want for alarms and audible signals. ■ Touch OK. When the alarms and audible signals are switched on, ④) will appear.

Messages in the display

Message	Possible cause and solution
lights up on the display, the refrigeration appliance does not get cold even though the controls and the interior lighting are working.	Demo mode has been activated. ■ Touch OK. Miele will appear initially in the display, followed by the start screen. ■ Touch OK. ■ In Settings mode ②, use the < or > sensor control to scroll to the I symbol. ■ Touch OK. After Demo mode I has been switched off, the refrigeration appliance shuts down and must be switched on again.
is lit up on the display and the appliance cannot be used.	Cleaning mode is still switched on. ■ Touch the <i>OK</i> sensor control on the control panel to switch off Cleaning mode. © will appear in the display. ■ Touch <i>OK</i> . When Cleaning mode © is switched off, the dot in the upper corner of the display goes out. ■ Use the < and > sensor controls to scroll to the ⇒ symbol and touch <i>OK</i> . The refrigeration appliance will start cooling again.
Nothing is visible on the display. The display is completely blank.	Sabbath mode ii is switched on: the interior lighting is switched off and the appliance is cooling. Touch <i>OK</i> . iii will appear in the display. Touch <i>OK</i> . When the Sabbath-mode function ii is switched on, a dot appears in the upper corner of the display •. Touch <i>OK</i> . When the Sabbath-mode function ii is switched off, the dot in the upper corner of the display goes out.

Message	Possible cause and solution
is lit up on the display and the appliance cannot be used.	The safety lock function has been activated. ■ Unlock the refrigeration appliance temporarily or switch the safety lock function off completely (see "Selecting additional settings – Deactivating the safety lock function 分分 temporarily/switching off completely").
The symbol lights up on the status display and an audible signal also sounds.	The carbon-filter change indicator ② reminds you that the carbon filter needs to be changed. ■ Replace the carbon filter in the holder (see "Cleaning and care – Replacing the carbon filters (optional accessory)") and confirm that the carbon filter has been replaced by touching the <i>OK</i> sensor control. The ③ symbol will go out on the status display.
☐ _△ lights up yellow in one of the temperature displays and an alarm also sounds.	The door alarm has been activated. ■ Touch <i>OK</i> . The alarm tone will stop and the □ _△ symbol will go out. ■ Close the relevant appliance door.

Massaga	Possible cause and solution
Message	
lights up in the freezer-section temperature display and an alarm also sounds.	The temperature alarm has been activated; the temperature in the freezer section has risen higher or fallen lower than the temperature set. Possible reasons for this include: - The appliance door was opened too frequently. - A large quantity of fresh food has been placed in the freezer without switching on the Super-Frost function.
	 A prolonged power failure has occurred. The refrigeration appliance has a fault. Touch OK.
	The alarm message is confirmed: ▮ goes out and the alarm stops.
	The warmest temperature recorded in the freezer section will flash for about 1 minute in the display. Then the temperature display will change to the current temperature in the freezer section.
	You can exit from the flashing temperature display early: Touch OK.
	The warmest temperature display will disappear. The display will then revert to showing the current temperature in the freezer section. Rectify the cause of the alarm. Depending on the temperature displayed, you should check whether food in the freezer has
	started to thaw or has defrosted. If it has, cook it before freezing it again.

Message	Possible cause and solution
□ Lights up in the display and an alarm also sounds.	Indication of a power failure: the temperature in the freezer section over the last few days or hours has risen too high because of a power failure. Touch OK.
	The fault message is confirmed: -□ ⚠ goes out and the alarm will stop.
	The warmest temperature recorded in the freezer section will flash for about 1 minute on the temperature display for the freezer section. Then the temperature display will change to the current temperature in the freezer section.
	You can exit from the flashing temperature display early: ■ Touch OK.
	The warmest temperature display will disappear. The display will then revert to showing the current temperature in the freezer section. The appliance will go back to the last temperature setting when the power is restored.
	 Rectify the cause of the alarm. Depending on the temperature displayed, you should check whether food in the freezer has started to thaw or has defrosted. If it has, cook it before freezing it again.

Message	Possible cause and solution
lights up in the display and a fault code F with numbers may ap-	There is a fault. Switch the alarm off by touching OK. Contact Miele Customer Service.
pear. An alarm will also sound.	To report the fault, you need the fault code and also the model identifier and serial number of your refrigeration appliance. You can access this information in the display: Touch OK.
	The appliance data required will be shown on the display. Touch OK.
	 To switch off the refrigeration appliance, use the < or > sensor control to scroll to the ⊕ symbol. To exit the information display, use the < or > sensor control to scroll to the ⊕ symbol. Touch OK.
	There is an appliance fault: this display always has priority over any settings which have just been selected.
	An appliance fault has priority over any current door and/or temperature alarms displayed.

The interior lighting is not working

Risk of electric shock due to exposed, live electrical components.

When removing the lighting cover, there is a risk of coming into contact with live electrical components.

Do not remove the lighting cover. The LED lighting may only be repaired or replaced by Customer Service.

Risk of injury from LED lighting.

This lighting corresponds to risk group RG 2. If the cover is defective, there is a risk of eye injury.

If the lighting cover is defective, do not look from a close range directly into the lighting with optical instruments (e.g., magnifying glass or similar).

Problem	Possible cause and solution
The interior lighting is not working.	The refrigeration appliance has not been turned on. Turn the refrigeration appliance on.
	Sabbath mode ii is switched on: the display is dark and the refrigeration appliance is cooling. Touch OK.
	iii will appear in the display. ■ Touch <i>OK</i> .
	When the Sabbath-mode function ii is switched on, a dot appears in the upper corner of the display •. ■ Touch <i>OK</i> .
	When the Sabbath-mode function iii is switched off, the dot in the upper corner of the display goes out.
	To avoid overheating, the interior lighting switches itself off automatically after approximately 15 minutes if the appliance door is left open. If this is not the cause, there is a fault. Contact Miele Customer Service.

Causes of noises

Normal noises	Cause
Brrrr	A humming noise is made by the motor (compressor). This noise can get louder for brief periods when the motor switches on.
Blub, blub	A gurgling noise can be heard when the coolant circulates through the pipes.
Click	Clicking sounds occur whenever the thermostat switches the motor on or off.
Sssrrrrr	You can sometimes just hear the sound of the fan inside the appliance.
Crack	A cracking sound can be heard when materials expand inside the appliance.
Please hear in mind that a cortain amount of noise is unavoidable (from the com-	

Please bear in mind that a certain amount of noise is unavoidable (from the compressor and the coolant circulating through the system).

Noises	Cause and solution
Rattling, clinking	The appliance is uneven. Realign the appliance using a level by raising or lowering the adjustable feet underneath the refrigeration appliance.
	For niches of 55" (140 cm) and more: place the stabilizing rods supplied underneath the appliance base.
	Drawers, baskets, or shelves are jiggling or are stuck. Check all removable parts and reinsert them correctly if required.
	Bottles or containers are touching each other. Separate them a little.

Customer Service

Contact in the event of a fault

In the event of a fault which you cannot remedy yourself, please contact your Miele dealer or Miele Customer Service.

You can book a Miele Service Call online at www.miele.com/service.

Contact information for Miele Customer Service can be found at the end of this document.

Please quote the model identifier and serial number of your appliance (SN) when contacting Miele Customer Service. Both pieces of information can be found on the data plate.

You will find the data plate inside your appliance.

Displaying appliance information

This can be found in Settings mode under Information **i** (see "Selecting additional settings") or on the data plate inside the refrigeration appliance.

Appliance warranty and product registration

You can register your product and/or view the manufacturer's warranty terms and conditions for Miele appliances and vacuum cleaners at www.mieleusa.com.

Please have the model and serial number of your appliance available when contacting Customer Service.

U.S.A.

Miele, Inc.

National Headquarters

9 Independence Way Princeton, NJ 08540 www.mieleusa.com

Customer Support

Phone: 888-99-MIELE (64353) info@mieleusa.com

International Headquarters

Miele & Cie. KG Carl-Miele-Straße 29 33332 Gütersloh Germany

Canada

Importer
Miele Limited

Headquarters and Miele Centre

161 Four Valley Drive Vaughan, ON L4K 4V8 www.miele.ca

Customer Care Centre

Phone: 1-800-565-6435 905-532-2272 customercare@miele.ca



KFN 7734 F