

FISHER & PAYKEL

SPECIFICATION GUIDE

INTEGRATED DOUBLE DISHDRAWER™ DISHWASHER, TALL, SANITIZE



OVERVIEW

Introducing our new Series 11 DishDrawer™ Dishwasher with stainless steel tub. Designed to blend seamlessly with kitchen cabinetry, this dishwasher is panel ready. Flexible racking allows for adjustments to fit in a variety of dishes. A combination of clever technology and simple mechanics means greater reliability and better wash performance.

MODELS

Integrated Double DishDrawer™ Dishwasher, Tall, Sanitize
DD24DTX6I1

Integrated Double DishDrawer™ Dishwasher, Tall, Sanitize
DD24DTX6HI1

SERIES & STYLE

Series 11
Integrated style

FEATURES

- ① Ergonomic kitchen drawer design with soft-close mechanism and knock-to-pause function
- ② Each drawer operates independently allowing for true half load washes
- ③ Seven place settings per drawer with adjustable racking to fit taller dishes up to 12 1/4" (310mm) plate size in top drawer
- ④ Built to withstand your wash requirements with easy-to-clean stainless steel interior
- ⑤ Eight wash programs from heavy to light, including auto, 60 minute wash and glassware programs
- ⑥ Quiet, Extra Dry and Sanitize wash modifiers provide extra wash options
- ⑦ Spray arm sensing for a reliable wash
- ⑧ Fan-assisted drying removes moisture from the final rinse leaving your dishes with a dry finish
- ⑨ With Energy Star Most Efficient rating, this DishDrawer dishwasher delivers a powerful wash with optimal results*
- ⑩ Wi-Fi capability and a SmartHQ™ app for remote control and notifications

* DD24DTX6I1 only

ACCESSORIES

- ① Cutlery basket included

FISHER & PAYKEL


SPECIFICATION GUIDE

INTEGRATED DOUBLE DISHDRAWER™ DISHWASHER, TALL, SANITIZE

SPECIFICATIONS

| | |
|-------------------|---|
| Model No. | DD24DTX6II, DD24DTX6HII |
| Dimensions | H 34-36 3/8" (864-924mm) W 23 9/16" (599mm) D 21 3/4" (553mm) |
| Weight | 134lb (61kg) |
| Electrical | |
| Supply | 120V, 60Hz |
| Service | 9.6A |
| Receptacle | 3-prong grounding type |
| Plumbing | |
| Supply | Supplied hose to suit 3/8" (9mm) male compression fitting |
| Pressure | Min. 0.1 MPa (14.5 psi) Max. 1 MPa (145 psi) |

PRODUCT DIMENSIONS

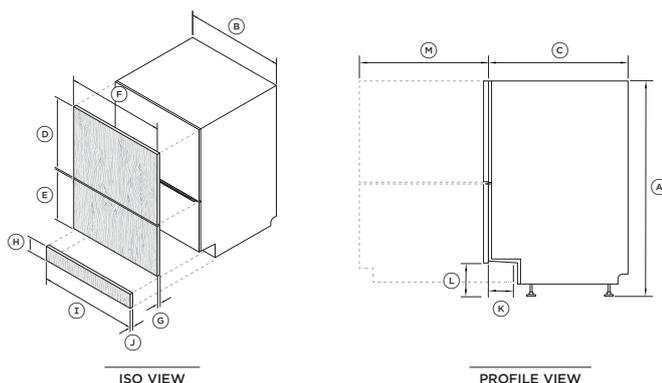


| | in | mm |
|--|-------------------|-----------|
| (A) Overall height* | 34 - 36 3/8 | 864-924 |
| (B) Width of chassis** | 23 9/16 | 599 |
| (C) Depth of chassis*** | 21 3/4 | 553 |
| (D) Height of custom upper front panel | min. 17 3/8 | min. 442 |
| (E) Height of custom lower front panel | 12 1/4 - 14 3/16 | 311 - 360 |
| (F) Width of custom front panels | 23 7/16 - 24 3/16 | 596 - 615 |
| (G) Depth of custom front panels | 5/8 - 13/16 | 16 - 20 |
| (H) Height of custom toe kick panel | 1 3/4 - 4 13/16 | 45 - 123 |
| (I) Width of custom toe kick panel** | 23 7/16 - 24 3/16 | 596 - 615 |
| (J) Depth of custom toe kick panel | max. 3/8 | max. 9 |
| (K) Depth of toe kick recess | 1 9/16 - 3 15/16 | 40 - 100 |
| (L) Height from floor to custom front panel base* | 4 - 6 3/8 | 100 - 160 |
| (M) Depth of drawer opening*** | 20 3/4 | 527 |

*Depending on adjustment of levelling feet

**Depending on cavity width

***Excluding custom panels and handles


PLUMBING AND ELECTRICAL

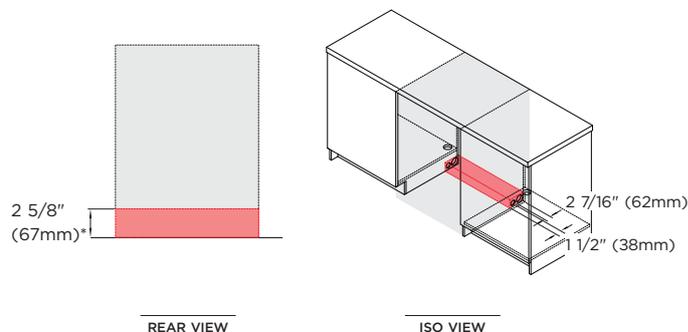

Service outlet at rear extends both sides, hoses and cords can be routed to either or both sides.

*Depending on adjustment of leveling feet

CAVITY DIMENSIONS: STANDARD INSTALLATION

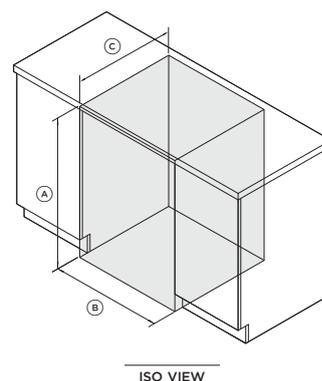

| | in | mm |
|-----------------------------------|--------|-----|
| (A) Minimum inside height* | 34 | 864 |
| (B) Minimum inside width | 23 5/8 | 600 |
| (C) Minimum inside depth** | 22 3/4 | 579 |

*Depending on adjustment of levelling feet

**Including front panels