

24" 8KG WaveActive Front Load Washing Machine



WaveActive drum



ChildLock



Inverter PowerDrive motor



SoftSound



AutoWash



Four depths



Simple interface



DownWear



AllergyCare



StopAddGo



StableTech



Sleek Door



SterilTub



Washing Modes



AquaStop

GENERAL PROPERTIES

Front/Top Load	Front Load
Colour	White
FEATURES	
Motor	Inverter PowerDrive motor
WaveActive	I
Spin Speed	1,400 RPM
Washing Capacity	8KG
Drum Volume	64L
Controls	Button/Selector Knob
Type of Display	LED Display
Delayed Start	Up to 24hrs
Stop/Add/Go/Pause Cycle	I
Pre-Wash & Personal Settings	For all programs
Load Capacity (place settings)	14
Audio Signal	Soft Sound
Self Cleaning Program	Sterile Tub
Stable Tech Side Panel	I
Sleek Door	I
Partial AquaStop	I
Lockable Control Panel	I

PROGRAMS & MODES

Auto Wash	Sports Wear
Cotton	Wool/Hand Program
Mix/Synthetics	Speed
Sterile Tub	Allergy Care
Rinse & Soft	NormalCare (Mode)
Spin	EcoCare (Mode)
Down Wear	TimeCare (Mode)

TECHNICAL SPECIFICATIONS

Noise Level Washing	54 dB(A)re 1 pW
Noise Level Spinning	75 dB(A)re 1 pW
Electrical Connection	208/230 V / 15 Amp / 60Hz
Connected Load	2,300 W
Consumption in Standby Mode	0.3 W


DIMENSIONS & WEIGHT

Unit (WxHxD) inch	23 ^{5/8"} x 33 ^{7/16"} x 24 ^{5/8"}
Unit (WxHxD) mm	600 mm x 850 mm x 625 mm
Net Weight (KG)	78.4 KG
Gross Weight (KG)	82.9 KG

ENVIRONMENTAL STANDARDS

ENERGYSTAR®	I
-------------	---

SPECIFICATIONS

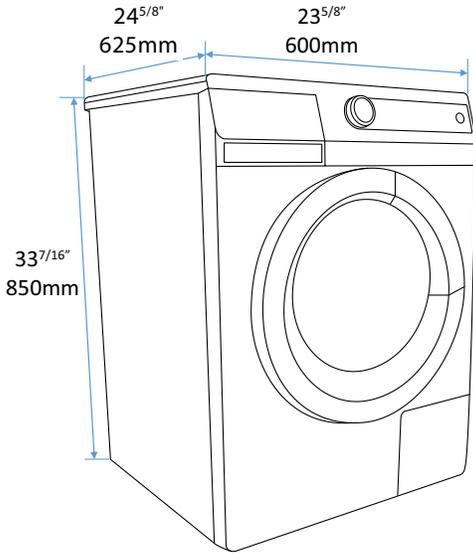

TECHNICAL SPECIFICATIONS

Noise Level Washing	54 dB(A)re 1 pW
Noise Level Spinning	75 dB(A)re 1 pW
Electrical Connection	208/230 V / 15 Amp / 60Hz
Connected Load	2,300 W
Consumption in Standby Mode	0.3 W


DIMENSIONS & WEIGHT

Unit (WxHxD) inch	23 ^{5/8} x 33 ^{7/16} x 24"
Unit (WxHxD) mm	600 mm x 850 mm x 610 mm
Net Weight (KG)	78.4 KG
Gross Weight (KG)	82.9 KG


ENVIRONMENTAL STANDARDS

ENERGYSTAR®	1
-------------	---

CONNECTION LENGTHS – LEFT SIDE

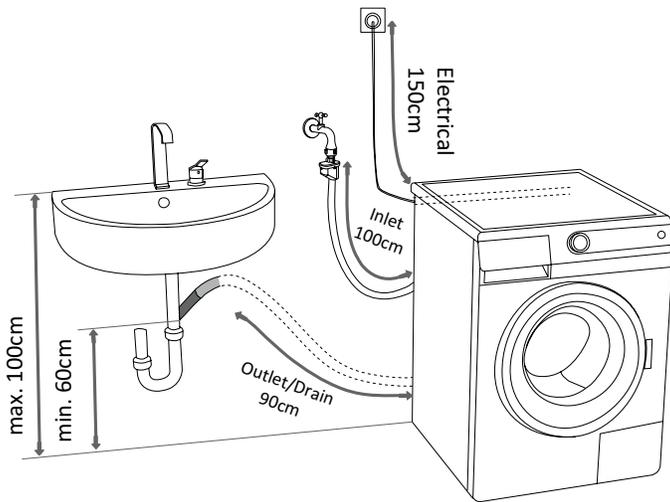


CONNECTION LENGTHS – RIGHT SIDE

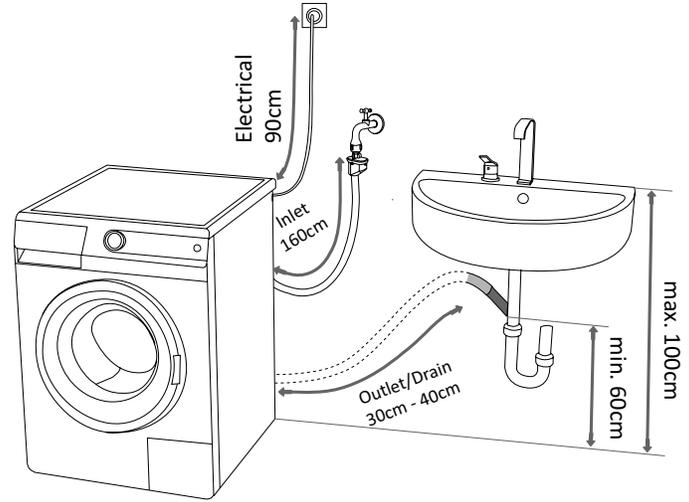

- Please note that the connection lengths will vary depending on the location of water/electrical hookups.
- Outlet drain MUST BE between 60cm – 100cm above floor level
- Gorenje washers come with an AQUASTOP drain hose, allow a min. of 2" to the back of the wall

WASHER CLEARANCES

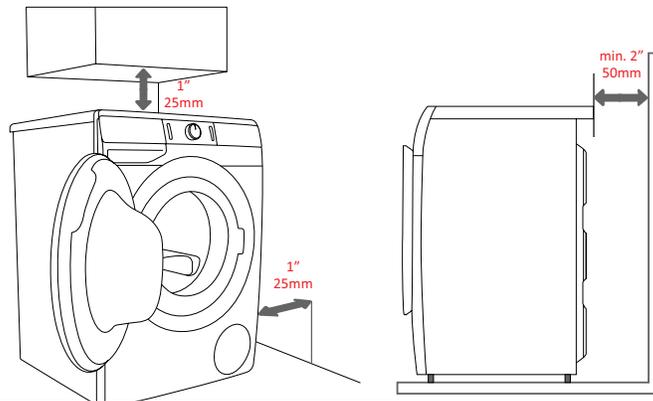

- Please note that the connection lengths will vary depending on the location of water/electrical hookups.
- Outlet drain MUST BE between 60cm – 100cm above floor level
- Gorenje washers come with an AQUASTOP drain hose, allow a min. of 2" to the back of the wall.

gorenje

Life Simplified

WARRANTY INFORMATION

GORENJE Appliances are designed and manufactured to the highest standards. Each appliance is covered by a comprehensive 2-year parts and labour warranty.

Refer to product warranty policy for complete terms and conditions.

FOR PARTS & SERVICE

Euro-Parts & Service

39822 Belgrave Road, Belgrave, ON. N0G 1E0 1 866 722 2262

www.euro-parts.ca • parts@euro-parts.ca • service@euro-parts.ca

Gorenje appliances are imported and distributed in North America by Euro-Line Appliances Inc. For more information, please visit one of our showrooms or www.ela.ca / www.elawest.ca

EURO-LINE APPLIANCES INC.

871 Cranberry Court, Oakville, ON L6L
6J7 Canada
905 829 3980
1 800 421 6332
info@ela.ca

EURO-LINE APPLIANCES INC.

101-1014 Homer Street, Vancouver, BC
V6B 2W9 Canada
604 235 3980
1 855 ELA WEST (352 9378)
info@elawest.ca