



48" PRO-STYLE® GAS RANGE

JGRP548WP – 47<sup>7</sup>/<sub>8</sub>" x 38<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"

PRODUCT DIMENSIONS

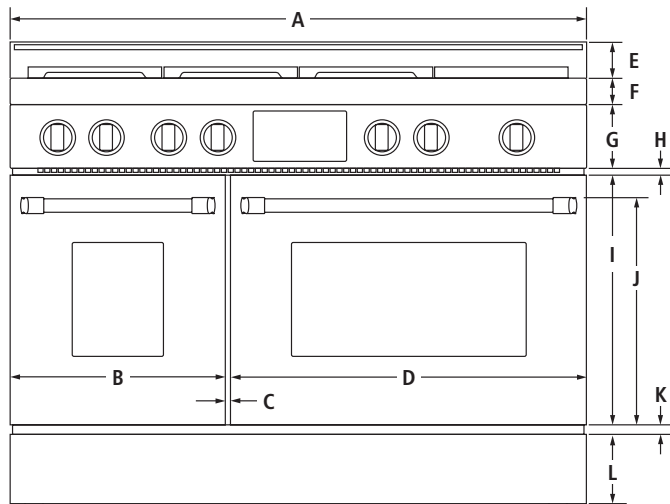

FRONT VIEW

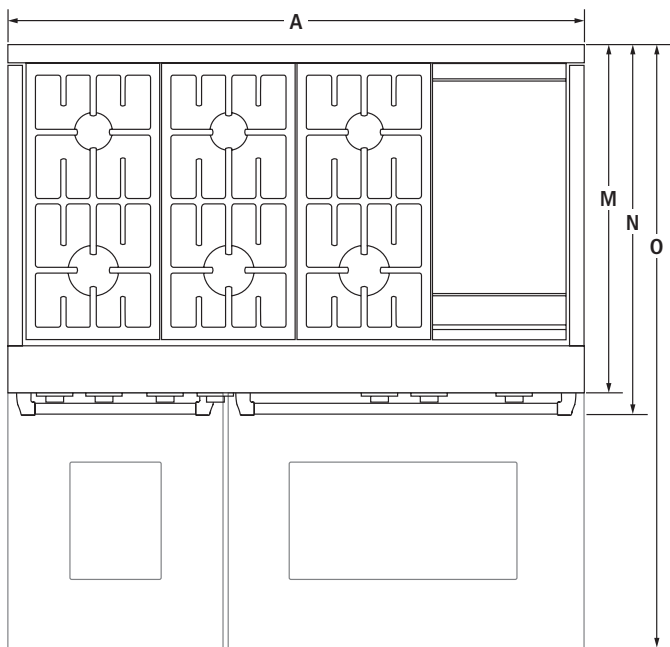


TOP VIEW

MODEL #		JGRP548WP	
		in	cm
<b>A</b>	Overall width	47 <sup>7</sup> / <sub>8</sub>	121.6
<b>B</b>	Width of secondary oven door	17 <sup>5</sup> / <sub>8</sub>	44.6
<b>C</b>	Space between doors	<sup>3</sup> / <sub>4</sub>	1.8
<b>D</b>	Width of main oven door	29 <sup>5</sup> / <sub>8</sub>	75.2
<b>E</b>	Height of island trim backsplash	3	7.6
<b>F</b>	Height of bullnose	2 <sup>1</sup> / <sub>4</sub>	5.5
<b>G</b>	Height of control panel	5 <sup>3</sup> / <sub>8</sub>	13.5
<b>H</b>	Space between doors and control panel	<sup>7</sup> / <sub>8</sub>	2.0
<b>I</b>	Height of doors	20 <sup>3</sup> / <sub>4</sub>	52.5
<b>J</b>	Height to top of handles	19 <sup>3</sup> / <sub>8</sub>	49.0
<b>K</b>	Space between doors and lower panel	1	2.5
<b>L</b>	Height of lower panel	5 <sup>1</sup> / <sub>2</sub>	14.0
<b>M</b>	Depth with control panel overhang	27 <sup>3</sup> / <sub>8</sub>	69.5
<b>N</b>	Depth with handles	29 <sup>1</sup> / <sub>4</sub>	74.2
<b>O</b>	Depth with doors fully open	45 <sup>3</sup> / <sub>4</sub>	116.2

48" PRO-STYLE® GAS RANGE

JGRP548WP – 47<sup>7</sup>/<sub>8</sub>" x 38<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"

DIMENSIONS AS INSTALLED

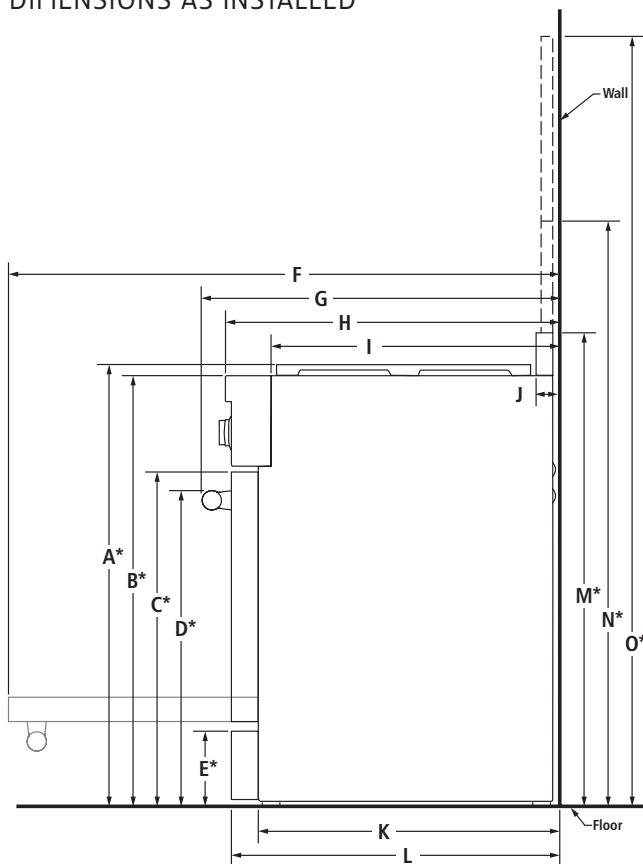

SIDE VIEW


MODEL #		JGRP548WP	
		in	cm
A*	Height to top of grates (min.)	36 <sup>3</sup> / <sub>4</sub>	93.3
B*	Height to top of cooking surface (min.)	35 <sup>3</sup> / <sub>4</sub>	90.8
C*	Height to top of doors (min.)	27 <sup>3</sup> / <sub>8</sub>	69.5
D*	Height to top of handles (min.)	25 <sup>7</sup> / <sub>8</sub>	65.7
E*	Height to top of lower panel (min.)	5 <sup>7</sup> / <sub>8</sub>	14.9
F	Depth with doors fully open	45 <sup>3</sup> / <sub>4</sub>	116.2
G	Depth with handles	29 <sup>1</sup> / <sub>4</sub>	74.2
H	Depth with control panel overhang	27 <sup>3</sup> / <sub>8</sub>	69.5
I	Depth without control panel	23 <sup>1</sup> / <sub>2</sub>	59.5
J	Depth of island trim backsplash	2 <sup>1</sup> / <sub>4</sub>	5.7
K	Depth without doors	24 <sup>5</sup> / <sub>8</sub>	62.5
L	Depth with doors	26 <sup>3</sup> / <sub>4</sub>	68.0
M*	Height to top of island trim backsplash (min.)	38 <sup>3</sup> / <sub>4</sub>	98.4
<b>OPTIONAL ACCESSORIES</b>			
N*	Height to top of adjustable stainless steel backsplash (min.)	55 <sup>1</sup> / <sub>2</sub>	141.0
O*	Height to top of adjustable stainless steel backsplash (max.)	74 <sup>3</sup> / <sub>4</sub>	189.9

\*Add 1<sup>3</sup>/<sub>4</sub>" (4.4 cm) to the height dimension when leveling legs are fully extended.


48" PRO-STYLE® GAS RANGE

JGRP548WP – 47<sup>7</sup>/<sub>8</sub>" x 38<sup>3</sup>/<sub>4</sub>" x 29<sup>1</sup>/<sub>4</sub>"


OPENING/CLEARANCE DIMENSIONS

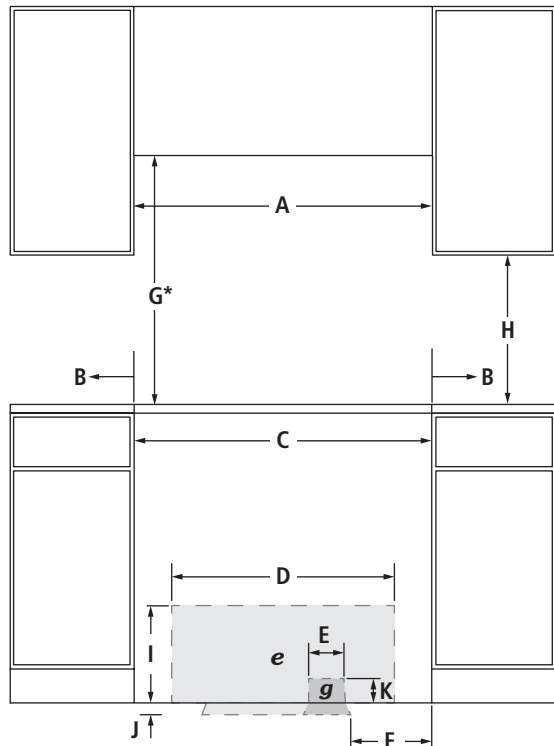

FRONT VIEW

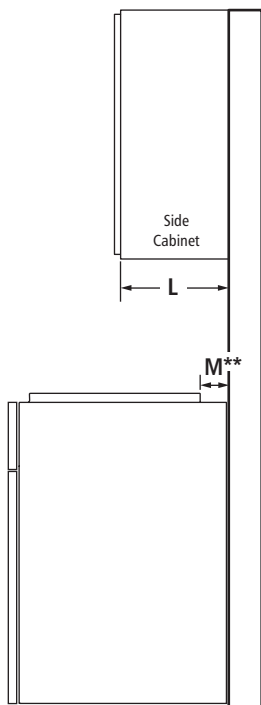

SIDE VIEW

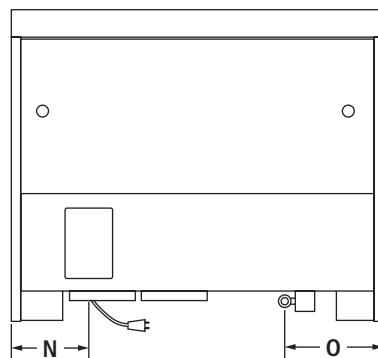

BACK VIEW

MODEL #		JGRP548WP	
		in	cm
<b>A</b>	Width of combustable area above cooking surface (min.)	48	121.9
<b>B</b>	Width from range to fixed wall or other combustable material (min.)	6	15.2
<b>C</b>	Width of opening (min.)	48 <sup>1</sup> / <sub>4</sub>	122.6
<b>D</b>	Width of electrical installation area	40	101.6
<b>E</b>	Width of gas installation area	24	61.0
<b>F</b>	Width from side cabinet to gas installation area	6	15.2
<b>G*</b>	Height to bottom of uncovered wood or metal cabinet above cooking surface (min.)	42	106.7
<b>H</b>	Height to bottom of uncovered wood or metal cabinet (min.)	18	45.7
<b>I</b>	Height of electrical installation area	15	38.1
<b>J</b>	Depth of electrical and gas installation area	5	12.7
<b>K</b>	Height of gas installation area	3	7.6
<b>L</b>	Depth of upper cabinet (max.)	13	33.0
<b>M**</b>	Depth to wall (min.)	6	15.2
<b>N</b>	Width to electrical conduit	9 <sup>1</sup> / <sub>8</sub>	23.0
<b>O</b>	Width to gas inlet	14 <sup>3</sup> / <sub>8</sub>	36.5
<b>e</b>	Recommended electrical access location		
<b>g</b>	Recommended gas supply line location		

\*Dimension can be reduced by 6" (15.2 cm) when bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet metal, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

If installing a hood or hood liner above the range, follow the hood or hood liner instructions for dimensional clearances above the cooking surface.

\*\*If back wall is constructed of a combustable material and a backsplash is not installed, a 6" (15.2 cm) minimum clearance is required.

**ELECTRICAL REQUIREMENTS**

120 volt, 60 Hz, AC only, 15-amp fused, grounded circuit is required. A dedicated circuit is recommended.

# JENN-AIR® DETAILED PLANNING DIMENSIONS

## VENTILATION SELECTION CHART – RANGETOPS AND RANGES

MODEL #	PRO-STYLE™ HOODS			EURO-STYLE ISLAND-MOUNT HOODS		EURO-STYLE WALL-MOUNT HOODS		GLASS COLLECTION ISLAND-MOUNT HOOD	GLASS COLLECTION WALL-MOUNT HOODS		PERIMETRIC HOOD	OILED BRONZE WALL-MOUNT HOODS		EURO-STYLE TELESCOPING DOWNDRAFT SYSTEMS	CUSTOM HOOD LINERS		OVER-THE-RANGE MICROWAVE OVENS	
	JXW9048WP	JXW9036WP JXU9136WP	JXW9030WP JXU9130WP	JXI8042WS	JXI8036WS	JXW8036WS JXW8836WS	JXW8030WS	JXI5036WS	JXW5036WS	JXW5030WS	JXP5032WS	JXW6036WR	JXW6030WR	JXD7036YS JXD7030YS	1200 or 600 CFMA	600 CFMB	JMV9186W JMV8208W	
<b>PRO-STYLE® RANGETOPS</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JGCP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>36-INCH (less than 60,000 BTU total)</b>																		
JGCP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	—	★	★	—
<b>36-INCH (more than 60,000 BTU total)</b>																		
JGCP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>30-INCH (less than 60,000 BTU total)</b>																		
JGCP430WP – 4 Burners	■	★	★	■	■	■	■	■	■	■	■	■	■	—	—	★	★	—
<b>48-INCH (less than 60,000 BTU total)</b>																		
JGD8348CDP – 4 Burners & Grill Assembly	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>PRO-STYLE® DUAL-FUEL AND GAS RANGES</b>																		
<b>48-INCH (more than 60,000 BTU total)</b>																		
JDRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
JGRP548WP – 6 Burners & Griddle	★	—	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>36-INCH (less than 60,000 BTU total)</b>																		
JDRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	—	★	★	—
JGRP536WP – 4 Burners & Griddle	★	★	—	■	■	■	—	■	■	—	■	■	—	—	—	★	★	—
<b>36-INCH (more than 60,000 BTU total)</b>																		
JDRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
JGRP436WP – 6 Burners	★	★	—	—	—	—	—	—	—	—	—	—	—	—	—	★	—	—
<b>30-INCH (less than 60,000 BTU total)</b>																		
JDRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	—	★	★	—
JGRP430WP – 4 Burners	—	★	★	—	■	■	■	■	■	■	■	■	■	—	—	★	★	—
<b>SLIDE-IN RANGES</b>																		
<b>Dual-Fuel and Gas Conventional (less than 60,000 BTU total)</b>																		
JDS886BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JDS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8860BDP – 4 Burners	■	★	★	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■
JGS8850CD – 4 Burners	■	■	■	■	★	★	★	★	★	★	★	★	★	★	—	★	★	■
<b>ELECTRIC CONVENTIONAL</b>																		
JES8850CA – 5 Elements	■	■	■	■	★	★	★	★	★	★	★	★	■	■	—	★	★	■

A. Custom hood liners can be used with any of the following blower motors: UXB1200DYS, UXB0600DYS, UXI1200DYS or UXI0600DYS.  
 B. Blower motor UXB0600DYS is rated for up to 65,000 BTUs and can be used with the rangetops and ranges indicated.

KEY	
★	Style and Performance Pair
■	Performance Pair
—	Not Recommended

