

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature of up to nine minutes, a 550 CFM fan, two bright front-mounted LED lights, and a digital three-speed push button control panel.

Cyclone™

Green Features



3 Speed Push
Button Control



Long- lasting
LED lights



Grease Cup



Time- Delay
OFF Feature



Features



- Wall mount range hood
- 6" round duct adapter
- Non- stick Aluminium fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release Aluminium Mesh/ Stainless Steel Baffle filters
- Standard chimney flue fits upto 9 ft. ceiling
- Plug in connection

Specifications

• Air Flow Volume: 550 CFM	• Fan Type: Centrifugal Blower
• Electrical Connection: 120 V/60 Hz	• Finishes: Stainless Steel
• Power Consumption: 300 Watts	• Ducting: 6" Round
• Current: 2.5 Amps	• Noise Level: Min. 2 Sones Max. 6 Sones
• Fan Speed: 1599 RPM	

Options

- Filters: Aluminium Mesh Filters, Baffle Filters
- Chimney Flues: A1.CH10 - short (7'-8' ceilings)
A1.CH18 - standard (8'-9' ceilings)
A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

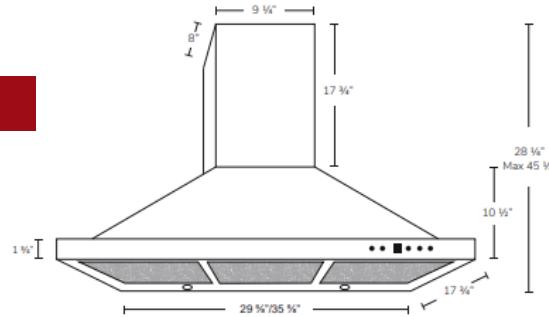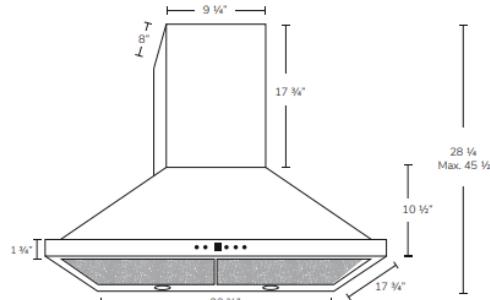

Model	Colour	Ducting	Filters	Size	CFM
SC50024	Stainless Steel	6"	Mesh	24"	550
SC50030	Stainless Steel	6"	Mesh	30"	550
SC50036	Stainless Steel	6"	Mesh	36"	550
SCB50024	Stainless Steel	6"	Baffle	24"	550
SCB50030	Stainless Steel	6"	Baffle	30"	550
SCB50036	Stainless Steel	6"	Baffle	36"	550