

MRRE215 - 15" REFRIGERATOR

THE ESSENTIAL COLLECTION



DESIGN

- Cylindrical door pull on stainless steel model.
- Matte black interiors with stainless steel accents on shelves.
- Panel-ready model accepts custom door panel.
- Zero-clearance, low-profile pin hinges on stainless steel models, panel-ready models require additional clearance.

FEATURES

- Built for both indoor & outdoor use.
- Carbon filter for enhanced air quality and odor reduction.
- Center Cabinet Vertical Lighting: Complete illumination for full visibility throughout the entire interior.
- Door alarm activates when the door is left open.
- Door lock provides added security.
- Effortless Entry Door: Minimizes the physical effort needed, enhancing ease of use for all family members.
- Electronic touch control enables precise temperature selection from 34°F to 61°F.
- Evenly distributed forced-air refrigeration system delivers rapid cool down and temperature stability.
- Field reversible door is shipped right-hand hinged.
- Four leveling legs adjustable up to 1 inch.
- Sabbath Mode disables interior lights, alarms, and digital displays while maintaining consistent cooling performance.
- Six-color multi-point LED lighting in adjustable white: bright white, warm white, cool white, and light blue, deep blue, and teal.

STORAGE

- 3.0 cu. ft. capacity stores up to 88 12-oz cans.
- Additional lower storage area.
- Three adjustable glass shelves.

CAPACITY

Volume	3.0 cu. ft.
Cans (12 oz)	88

DIMENSIONS

Product Depth	21 1/4" (54 cm)
Product Height (Min.)	33 5/8" (85.4 cm)
Product Width	15" (38.1 cm)
Product Weight	95 lbs
Shipping Depth	31" (78.7 cm)
Shipping Height	37" (94 cm)
Shipping Width	19" (48.3 cm)
Shipping Weight	115 lbs

CUSTOM PANEL DIMENSIONS

Panel Height	30 7/16" (77.3 cm)
Panel Thickness	5/8" (1.6 cm) or 3/4" (1.9 cm)
Panel Width	23 5/8" (60 cm)
Panel Weight (Max.)	40 lbs
Panel Type	2-3/4" (7 cm) solid panel

SUSTAINABILITY

Refrigerant Type	R600a
GWP (Global Warming Potential)	3 (very low)

TECHNICAL DETAILS

Cord Length	6 ft.
Electrical Requirements	115V / 60 Hz / 15A

WARRANTY

2 year parts & labor warranty / 6 year sealed system parts warranty (see complete warranty for details).



MRRE215 - 15" REFRIGERATOR


THE ESSENTIAL COLLECTION



INSTALLATION

- No additional clearance is needed for ventilation.
- Do not obstruct front grille air flow.
- Panel ready model requires 3/4" or 5/8" custom panel and handle (not supplied by Marvel).
- Add 1/2" for panel ready models with 3/4" integrated panel.

PRODUCT DIMENSIONS

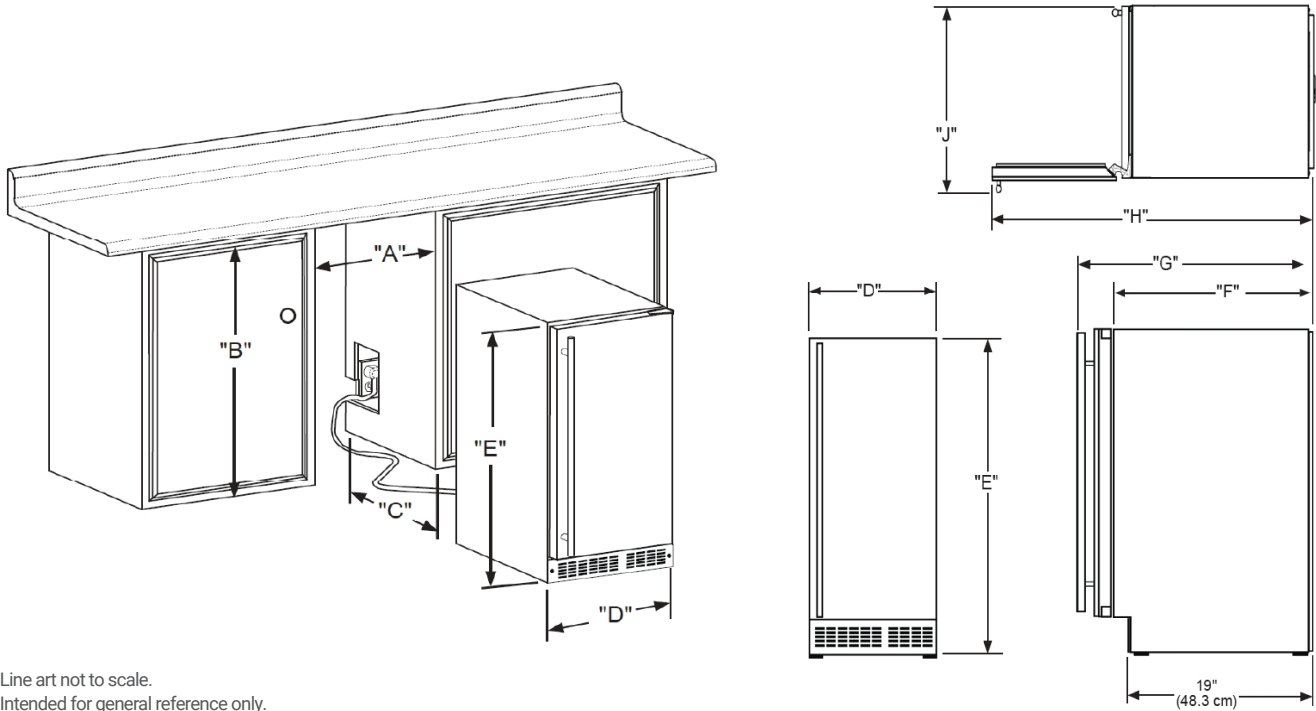

ROUGH IN DIMENSIONS		
"A"	"B"	"C"
15 1/4"	34 1/8" to 35 1/8"	24"
(38.7 cm)	(86.7 cm to 89.2 cm)	(61 cm)

CABINET DIMENSIONS					
"D"	"E"	"F"	"G"	"H"	"J"
15"	33 5/8" to 34 5/8"	21 1/4"	22 3/4"	36 1/2"	16 3/4"
(38.1 cm)	(85.4 cm to 88 cm)	(54 cm)	(57.8 cm)	(92.7 cm)	(42.5 cm)

MODELS



MRRE215-SS31A
Stainless Steel Solid



MRRE215-IS31A
Panel Ready Solid