



Dishwashers

FFBD1821M S/W

18" Built-In



Product Dimensions

Height (Adjustable)	32-1/2" – 34-7/8"
Width	17-5/8"
Depth (Including Door)	23"

More Easy-To-Use Features

Attractive Stainless Steel Exterior¹

Multiple Cycle Options

Features easy-to-use cleaning cycle options including China & Crystal and Heavy Wash.

Ready-Select® Controls

Easily select options with the touch of a button.

High Temperature Wash

Control Lock Option

ENERGY STAR®



Available in:



Stainless (S)



White (W)

¹Select model only.

Signature Features

Energy Saver Plus Cycle

Eco-friendly cycle uses less energy without compromising cleaning performance.

Energy Saver Dry Option

No heat dry option.


Stainless Steel Interior

Premium stainless steel interior for maximum durability.

Delay Start

Set your dishwasher to run on your schedule.

Features	
Control Design	Ready-Select*
Digital Display	
Door Latch	Pull Latch
Stay-Put Door Hinge Design	
Low Rinse-Aid Indicator Light	
Interior Design	Standard
Interior Colour	Stainless Steel
Wash System	Direct Feed
Wash Levels/Wash Speeds	4/1
Sound Package	UltraQuiet™ III
Filter	Manual Clean
Filter Trap	Removable
Soft Food Disposer	
dB Level	55
Drying System	Static Vent
Cycles	
Number of Cycles	6
Heavy	Yes
Normal	Yes
Light	Yes
Delicate	
Favourite	
China/Crystal	Yes
Rinse Only	Yes
Energy Saver	Yes
Upper Rack Wash Only	
Cycle Indicator Light	Yes
Control Lock	Yes
Options	
Heat/No Heat Dry	Yes
Hi-Temp Wash	
NSF® Certified Sanitize Rinse	
Delay Start	2 or 4 Hour
Rack System	
Rack Design/Rack Coating	Deluxe/Nylon
Upper Rack -	
Stemware/Champagne Glass Holders	
Fold-Down Tines	
Cup Shelves	
Lower Rack -	
Silverware Basket	Standard
Fold-Down Tines	
Small Items Cover	
Certifications	
ENERGY STAR®	Yes
Specifications	
Water Inlet Location	Left Bottom Front
Water Usage (Gallons)	3.96
Water Pressure (PSI)	20 - 120
Integral Air Gap on Supply	Yes
Leveling Legs	4
Power Supply Connection Location	Right Bottom Front
Voltage Rating	120V/60Hz/15A
Connected Load (kW Rating) @ 120 Volts ¹	1.44
Amps @ 120 Volts	8.5
Shipping Weight (Approx.)	71 Lbs.

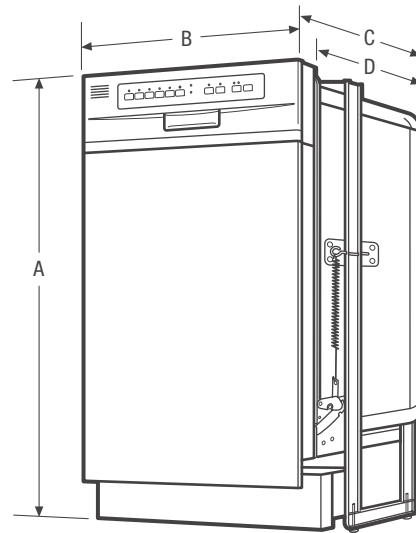

NOTE: For planning purposes only. Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions		Cutout Dimensions	
A - Height (Adjustable)	32-1/2" - 34-7/8"	Height (Min.)	32-1/2"
B - Width	17-5/8"	Height (Max.)	35-1/4"
C - Depth (Including Door)	23"	Width (Min.-Max.)	17-5/8" - 18"
D - Depth (To Tub Flange)	22-1/2"	Depth (Min.)	24"
Depth with Door Open 90°	46"		

¹For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

Accessories information available on the web at frigidaire.ca