

FRIGIDAIRE

GALLERY®



Built-In Cooktop

FGIC3667MB

36" Induction



Product Dimensions

Width	36-3/4"
Depth	21-1/2"
Height	4-3/8"

More Easy-To-Use Features

Cooktop Stays Cooler

With induction cooking, heat is transferred directly to the cookware, so the cooktop gets cooler to the touch — making it easier to clean.

Power Assist Function

Generates rapid heat for a faster boil.

Fits-More™ Cooktop

The Fits-More™ cooktop features five induction elements so you can cook more at once.

Cooking Versatility

Gentle enough to melt chocolate and powerful enough to boil water, so it's great for entertaining or getting dinner on the table quickly.

Express-Select® Controls

Easily go from warm to boil.

Smoothtop Ceramic Glass Cooking Surface

Hot Surface Indicators

Available in:



Black
(B)

Elements	Size	Watts
Right Front	10"	2,500 / 3,400
Right Rear	7"	1,800 / 2,600
Left Front	6"	1,450 / 2,000
Left Rear	8"	2,300 / 3,200
Center	8"	2,300 / 3,200

Signature Features



More Responsive

Cooking with induction is more responsive than gas or electric so you can easily go from simmer to boil.



Versatile Induction Elements

With up to five powerfully efficient induction elements, the Induction Cooktop offers the superior cooking flexibility. And the 10" induction element offers up to 3,400 watts of power, so you can bring water to a boil quickly.



Exceptional Temperature Control

Adjust heat with greater accuracy than on gas or electric cooktops especially at lower settings.




More Energy-Efficient

Cooking with induction is 70% more efficient than gas and 20% more efficient than electric.

Features	
Controls	Express-Select*
Surface Type	Black Ceramic Glass
Right Front Element (Watts)	10" - 2,500 / 3,400
Right Rear Element (Watts)	7" - 1,800 / 2,600
Left Front Element (Watts)	6" - 1,450 / 2,000
Left Rear Element (Watts)	8" - 2,300 / 3,200
Center Element (Watts)	8" - 2,300 / 3,200
Hot Surface Indicators	Yes
Control Location	Center Front
Certifications	
Sabbath Mode (Star-K® Certified)	
Specifications	
Power Supply Connection Location	Right Rear
Voltage Rating	240V / 208V / 60Hz
Connected Load (kW Rating) @ 240 / 208 Volts ¹	10.8 / 9.4
Amps @ 240 / 208 Volts	45.2 / 45.0
Minimum Circuit Required (Amps)	40
Approved for Electric Single Wall Oven Combination Installation ²	Yes
Shipping Weight (Approx.)	58 Lbs.

¹Single phase 3- or 4-wire cable, 120/240 or 120/208 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line.

²Cooktops are approved for installation above any of our Electric Single Wall Ovens.

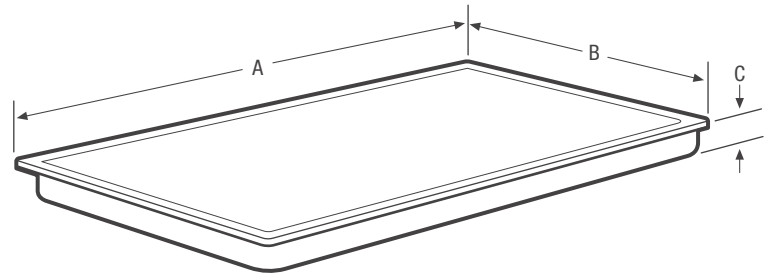

NOTE: For planning purposes only. Always consult local and national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.ca.



Product Dimensions	
A - Width	36-3/4"
B - Depth	21-1/2"
C - Height	4-3/8"

Cutout Dimensions	
Width (Min.) / (Max.)	35-7/8" / 36"
Depth (Min.) / (Max.)	20-3/8" / 20-1/2"
Height	4-1/2"

Granite Countertop Installation Kit available.

Accessories information available on the web at frigidaire.ca