


# CIRRUS CC34E6 RANGE HOOD

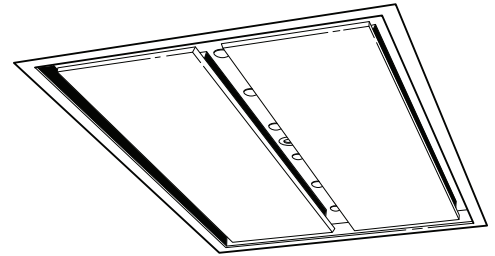


Today's open-living concepts integrate rooms and broad vistas. CIRRUS fits in with its linear, discrete, and virtually out of sight design that won't get in the way of any vista.

### FEATURES

- Italian design
- Ceiling mount
- Finishes: 430 brushed stainless steel #4
- Width: 110 cm (43-3/8")
- Ducted only
- 8" round duct connector/backdraft damper
- 3-level LED lighting (6 lamps included - 3 watts each - 3000K-3500K)
- 4-speed electronic light touch control
- Remote control included
- Use with exterior-mounted or attic-installed remote blowers, up to 6AMPS MAX., for different levels of exhaust capacities (see specifications)
- Delay timer control automatically shuts off range hood after 10 minutes
- Filter clean reminder
- Dishwasher-safe filters feature a quick-release latch
- For indoor use only

### OPTIONS (Not included with hood. Purchase separately.)

- 8-in. to 10-in. transition (Model 414)
- White glass door panels (Model AGPCC34W)
- Make-up air dampers (Models MD6T, MD8T, MD10T)

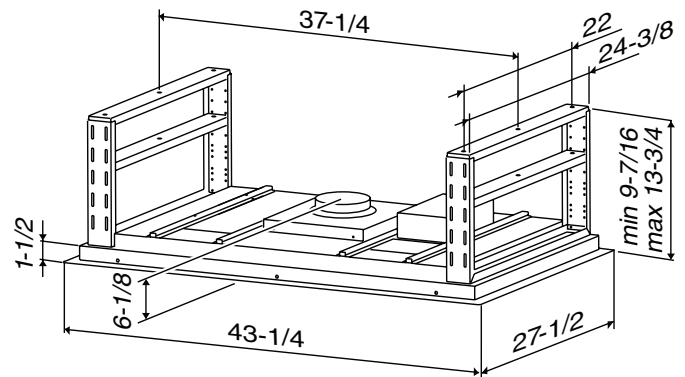

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6	wall or roof mount remote blowers	600 max.	120	0.22 (lights only) + 6.0 max. (blower only)	8-in. round at the hood.
EB9		900 max.			
EB12		1200 max.			
EB15		1500 max.			
ILB3	attic installed inline blowers	280 max.			See blower specs for duct requirements.
ILB6		600 max.			
ILB9		800 max.			
ILB11		1100 max.			



BEST Hartford, Wisconsin [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 800-558-1711  
 BEST Drummondville, QC, Canada [www.BestRangeHoods.com](http://www.BestRangeHoods.com) 866-737-7770

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date