

C1304C/B

FEATURES

Four elements and bridging option to accommodate different pan sizes

40% faster temperature response than gas or electric

Magnetic induction technology provides fast and perfectly distributed heat

Incredible cooking control, with lightning fast high heat and very low lows

Can be installed flush with countertop for smooth, continuous surface

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Cooktop stays relatively cool for added safety and easy cleanup

Cookware sensing guards against hot burners being left on

Efficiently transfers heat, because energy is supplied directly to the cookware




COOKTOP SPECIFICATIONS


- 1 - 1400 W Element
- 1 - 2100 W Element
- 1 - 2100 W Element with 3000 W Boost
- 1 - 2600 W Element with 3150 W Boost

DIMENSIONS


Technical drawing of the cooktop showing dimensions and conduit connection. The cooktop is 30" (762) wide and 21" (533) high. The drawing includes a side view showing the conduit connection. The conduit is 2 1/2" (64) high and 7/8" (22) wide. The conduit is connected to the cooktop at a height of 1 1/4" (32) from the bottom edge.



STANDARD INSTALLATION

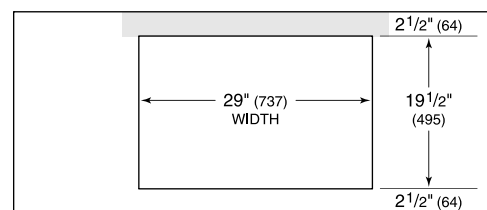

COUNTERTOP CUT-OUT

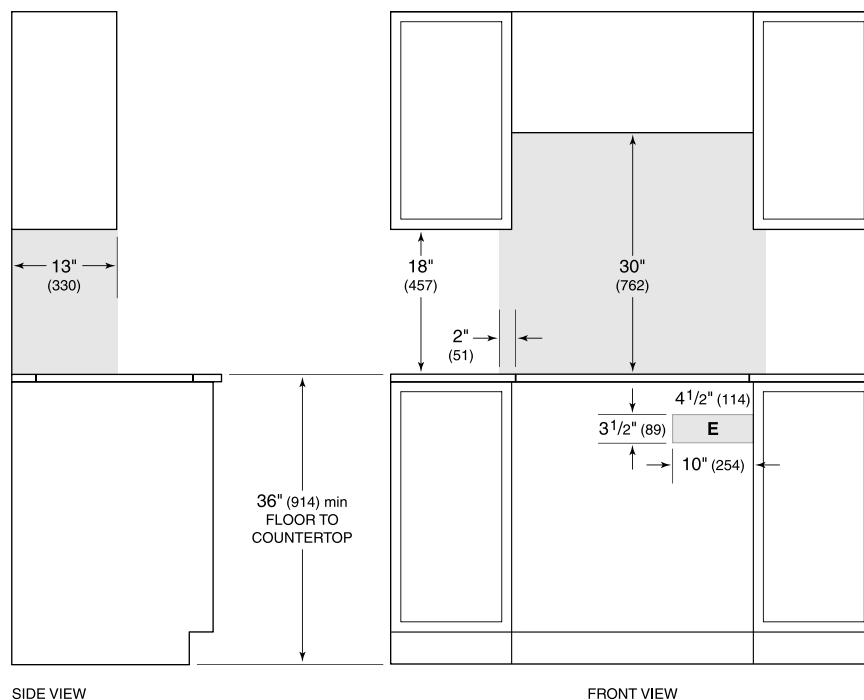

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical supply location only applies to installations with built-in oven.*