

15" Marvel Professional Clear Ice Machine with Tri-Color Illuminice[™] Lighting

Model # MP15CP

Performance

- The quietest ice machine you can buy
- New energy-saving options conserve water and energy
- Engineered to consistently produce pure, clear ice with unrivaled clarity, immediate cooling and slower melt
- Its uniform size and compact density prove to be the optimal shape to provide faster cooling, while taking up less space in your glass
- Produces up to 39 pounds of clear ice daily, the equivalent of nearly eight convenience-store bags of ice
- Streamlined componentry and single-connection water fitting for simple installation

Storage Capabilities

- Large-capacity bin stores 35 pounds of clear ice, while preserving quality and assuring fresh ice production
- Sleek scoop design is positioned for easy reach
- Easy-to-clean, hygienic interior surface

Touchpad Controls

- Marvel Intuit[™] Integrated Controls feature all-new settings for ultimate programmability
- Eco Ice[™] mode moderates ice production to conservative usage, saving 25% water (91 gallons monthly) and 25% energy (\$45 annually)**
- Delay Start/Vacation option automatically postpones operation by 1/4/6/8 (hour or day) intervals, preventing wasteful water and energy use
- Audible alerts and programmed cleaning reminders

Aesthetics

- New Illuminice[™] feature projects waterproof LED light through clear ice for a dazzling illumination effect
- At the touch of a button, change the interior light color to sapphire blue, amber glow, or arctic white
- Two-stage theater-style lighting offers full or half illumination
- Midnight black interior and the first-ever glass door option add drama to the ice presentation, perfect for entertaining
- Soft-close integrated hinge provides a seamless zero clearance installation and a smooth, gentle close
- Finish options: stainless steel (solid or glass door) or overlay (panel ready)*

Additional Convenience

- Includes factory installed drain pump
- Close Door Assist System[™] prevents energy loss by automatically drawing door to a gentle close
- Stainless steel toe kick adjustable to 4" with leveling legs
- 3-year parts and labor warranty, 5-year sealed system parts warranty



Ordering Options

| Solid Stainless Steel Door, Integrated Right Hinge, Professional Handle | MP15CPS2RS |
|--|------------|
| Solid Stainless Steel Door, Integrated Left Hinge, Professional Handle | MP15CPS2LS |
| Stainless Steel Frame Glass Door, Integrated Right Hinge, Professional Handle | MP15CPG2RS |
| Stainless Steel Frame Glass Door, Integrated Left Hinge, Professional Handle | MP15CPG2LS |
| Panel-Ready Solid Overlay Door, Integrated Right Hinge (Handle Not Included)* | MP15CPP2RP |
| Panel-Ready Solid Overlay Door, Integrated Left Hinge (Handle Not Included)* | MP15CPP2LP |

*Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.



Finish Options








Stainless Steel Frame


Solid Stainless Steel

Solid Overlay (Panel Ready)*

marvelrefrigeration.com | 800.223.3900

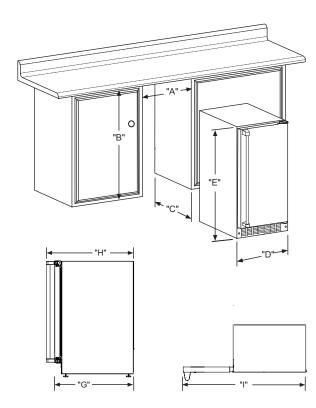

Panel Overlay Dimensions

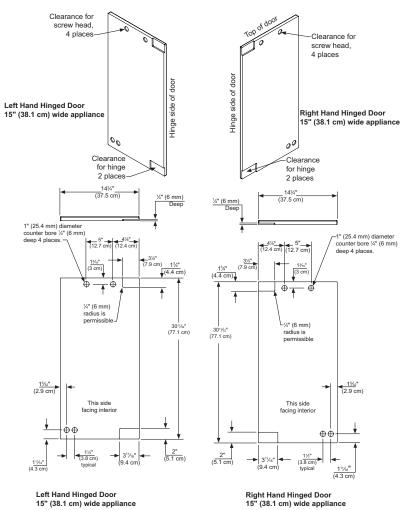

Right Hand Hinged Door 15" (38.1 cm) wide appliance

Rough-In Dimensions

| A. Rough-In Width | 15″ | |
|--------------------|--------------------|--|
| B. Rough-In Height | 34 1/4" to 35 1/4" | |
| C. Rough-In Depth | 24″ | |

Product Dimensions

| D. Width | 14 7/8″ | |
|------------------------------------|----------------------------|------------------------------|
| E. Height | 34" to 35" | |
| F. Depth | 21 1/2" | |
| G. Depth to Front of Door | Solid Door | 23 23/32″ |
| | Overlay Door | 22 7/8" Without Handle |
| H. Depth to Handle | 26 7/32" (Stainless Steel) | |
| I. Depth with door at 90° | Solid Door | 37 13/32" |
| | Overlay Door | 37 1/2" |

Product Features

| Interior Cabinet Finish | Black | |
|-------------------------|--|--|
| Capacity | Up to 35 lbs of clear ice | |
| Shelving System | NA | |
| Shelf Fronts | NA | |
| Other Storage | Ice Bin | |
| Interior Lighting | Tri-Color LED | |
| Toe Grill Finish | Stainless Steel | |
| Hinge | Soft Close Integrated Hinge | |
| Handle | Professional (Panel Overlay Does Not Include Handle) | |
| Control Type | Intuit™ | |
| Temperature Range | NA | |
| Lock | No | |
| Electrical Requirements | 120V / 60Hz / 15A | |
| Length of Power Cord | 6′ | |
| Shipping Weight | 127 lbs | |
| Finishes | Stainless Steel, Overlay | |
| Vacation Mode | Yes | |
| Agency Approvals | CSA | |

For comprehensive installation instructions, please visit www.marvelrefrigeration.com to access the owner's guide.