

24" Marvel Professional Refrigerated Drawers

Model # MP24RD

Performance

- Dynamic Cooling Technology[™] delivers the industry's best temperature stability and rapid cool down, tested and proven to cool nearly 2x faster than competitors
- Interior durably constructed from stainless steel, the most hygienic, easy-to-clean and stain-resistant of materials
- Insulated thermal-efficient cabinet and drawer fronts ensure optimum efficiency and preservation
- Now even quieter operation thanks to exclusive design enhancements to buffer and minimize sound

Storage Capabilities

- 5.0 cu. ft. capacity, stores up to (108) 12-oz cans in two large-capacity smooth-glide drawers
- Adjustable divider included in the top and bottom drawers

Touchpad Controls

- Multifunction Marvel Intuit[™] Integrated Controls allow you to select a precise cabinet temperature from 34° F to 42° F
- Vacation mode conserves energy during times when unit is not in use

Aesthetics

- Specially designed for a truly flush, zero clearance fit with adjoining cabinetry
- At the touch of a button, change the interior light color to sapphire blue, amber glow, or arctic white
- Two-stage theater-style lighting offers full or half illumination
- Elegant midnight black cabinet interior with sleek stainless steel drawers
- Professional styling: sleek stainless steel drawers, sturdy full-length handles and stainless steel toe kick adjustable to 4" with leveling legs
- Finish options: stainless steel or overlay (panel ready)

Additional Convenience


- Close Door Assist System[™] gently and automatically brings drawers to a close, ensuring they're never ajar
- Lock provides added safety and security for both drawers
- 3-year parts and labor warranty, 5-year sealed system parts warranty

Ordering Options

Solid Stainless Steel Drawer Fronts with Lock, Professional Handle	MP24RDS3NS
Panel-Ready Solid Overlay Drawer Fronts with Lock (Handle Not Included)*	MP24RDP3NP

^{*}Easy installation! No panel kit required. Consult your cabinet maker for overlay panel and handle options.



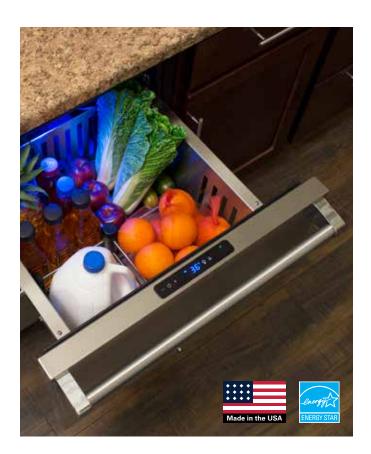











Solid Overlay (Panel Ready)*

Product Dimensions

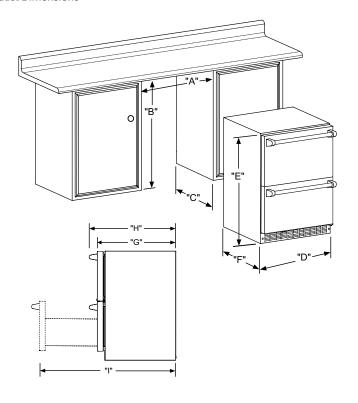

Panel Overlay Dimensions

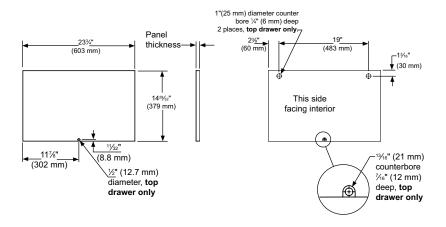

Rough-In Dimensions

A. Rough-In Width	24"	
B. Rough-In Height	34 1/4" to 35 1/25"	
C. Rough-In Depth	24"	

Product Dimensions

D. Width	23 7/8"	
E. Height	34" to 35"	
F. Depth	21 1/2"	
G. Depth to Front of Drawer	Solid Door	23 23/32"
	Overlay Door	22 7/8" Without Handle
H. Depth to Handle	26 7/32" (Stainless Steel)	
I. Depth with drawer open	Solid Door	39 5/32"
	Overlay Door	38 5/16

Product Features

Froduct reatures		
Interior Cabinet Finish	Black	
Capacity	Up to 108 12-oz cans	
Shelving System	NA	
Shelf Fronts	NA	
Other Storage	Double Drawer Storage	
Interior Lighting	Tri-Color LED	
Toe Grill Finish	Stainless Steel	
Hinge	NA	
Handle	Professional (Panel Overlay Does Not Include Handle)	
Control Type	Intuit™	
Temperature Range	34° to 42° F	
Lock	Yes	
Electrical Requirements	120V / 60Hz / 15A	
Length of Power Cord	6′	
Shipping Weight	160 lbs	
Finishes	Stainless Steel, Overlay	
Vacation Mode	Yes	
Agency Approvals	CSA, ENERGY STAR	