


DUNE WC35E SERIES RANGE HOOD



Imagine the softly shaped landscape of rolling hills or desert. DUNE found its inspiration from these simple clean shapes. With a shape that, by nature, provides good function - the reflective control is like touching water, controlling the hood magically.

FEATURES


- Italian design
- Wall mount
- Finish: 430 Stainless Steel, no. 4 Brushed
- Width: 35 7/16"
- Telescopic flue accommodates 8' to 9' ceilings
- 8" round duct connector/backdraft damper
- 1-level LED lighting (2 LED modules, 6 Watts max.)
- 4-speed, electronic control, glass capacitive touch
- Use with exterior-mounted or attic installed remote blowers for different levels of exhaust capacity (see specifications)
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filter
- Dishwasher-safe filters feature a quick-release latch
- For indoor use only

OPTIONS (Purchase separately.)

- 8-in. to 10-in. transition (Model 414)
- Flue extension for 10-ft. to 11-ft. ceilings (Model AEWC345IQSB) stainless steel

SPECIFICATIONS

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6	WALL OR ROOF MOUNT REMOTE BLOWERS	600 max.	120	0.4 (lights only) + 6.0 max. (blower only)	8-in. round at the hood.
EB9		900 max.			
EB12		1200 max.			
EB15		1500 max.			
ILB3	ATTIC INSTALLED INLINE BLOWERS	280 max.			See blower specs for duct requirements.
ILB6		600 max.			
ILB9		800 max.			
ILB11		1100 max.			

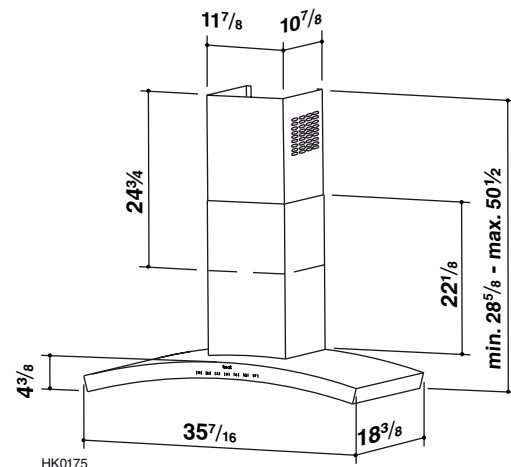


NOTE: DIMENSIONS SHOWN ARE IN INCHES.




BEST Drummondville, QC, Canada www.BestRangeHoods.ca 866-737-7770

REFERENCE	QTY.	REMARKS	Project	
			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

WC35E SERIES WIRING

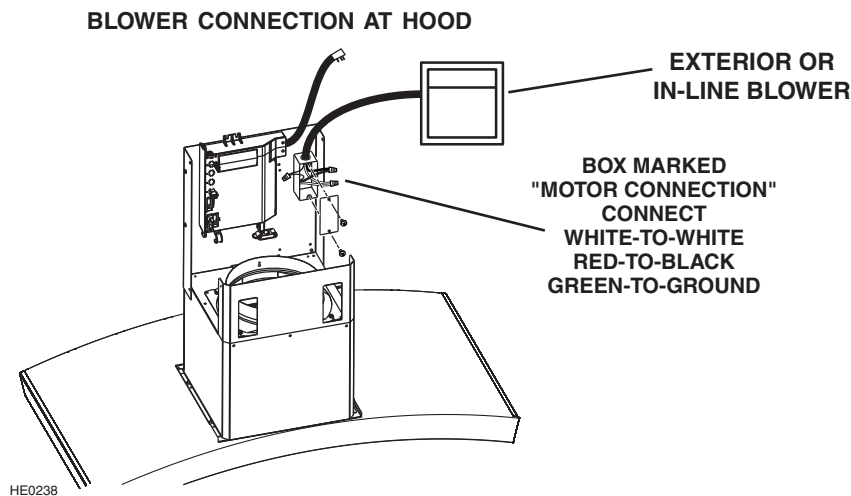

WC35E SERIES MOUNTING

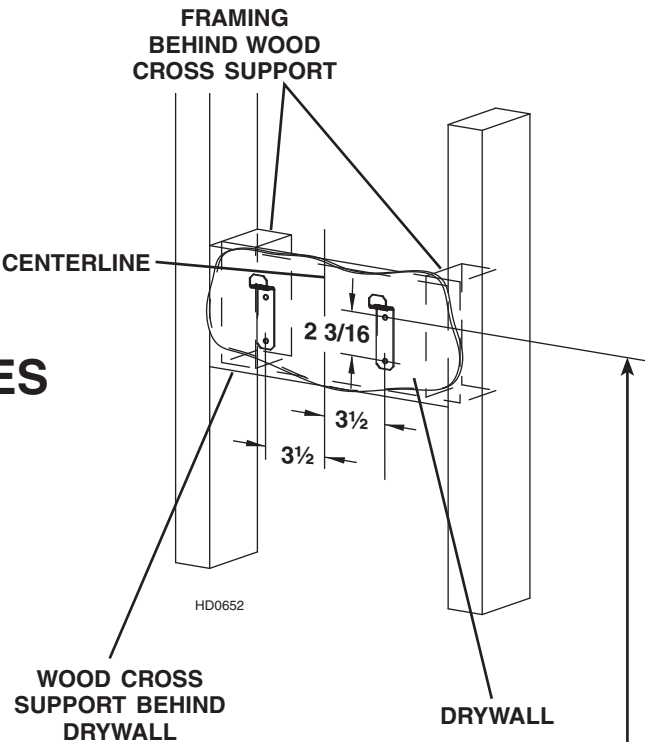

CEILING HEIGHT	DUCT METHOD	HOOD DISTANCE ABOVE 36" HIGH COOK TOP (see notes below)						
		24"	25"	26"	27"	28"	29"	30"
		MOUNTING BRACKET CENTER HOLE LOCATION ABOVE 36" HIGH COOKTOP						
8 FEET	DUCTED	37 7/8"	38 7/8"	39 7/8"	40 7/8"	41 7/8"	42 7/8"	43 7/8"
	NON-DUCTED	37 7/8"	38 7/8"	39 7/8"	40 7/8"	41 7/8"	42 7/8"	43 7/8"
9 FEET	DUCTED OR NON-DUCTED	---	---	---	40 7/8"	41 7/8"	42 7/8"	43 7/8"
10 FEET (see note b.)		37 7/8"	38 7/8"	39 7/8"	40 7/8"	41 7/8"	42 7/8"	43 7/8"

Notes:

- a. Minimum hood distance above cook top must not be less than 24". A maximum of 30" above cook top is highly recommended for best capture of cooking impurities. Distances over 30" are at the installer and user's discretion; and if ceiling height and flue length permit.
- b. Requires optional 10-ft. to 11-ft. flue extension, ducted model AEWC345IQSB.