


# COLONNE WPP9E SERIES RANGE HOOD



HB0143

The traditional chimney hood design from Italy has stood the test of time. The Colonne builds on this legacy with a new powerful design that can handle the needs of pro-style cooking.

### FEATURES


- Italian design
- Wall mount
- Finish: 430 Stainless Steel, no. 4 Brushed
- Widths: 36", 42", 48", 54"
- Telescopic flue accommodates 8' to 9' ceilings
- 10" round duct connector/backdraft damper
- 2-level halogen lamps, T4, G9, 25 Watts (3 lamps on 36" & 42" widths, 4 lamps on 48" & 54" widths)
- Use with exterior-mounted or attic installed remote blowers for different levels of exhaust capacity (see specifications)
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filters
- Dishwasher-safe, mesh lined, Hi-Flow™ baffle filters
- For indoor use only

### OPTIONS (Purchase separately.)

- 8-in. to 10-in. transition (Model 414)
- Flue extension for 10-ft. to 11-ft. ceilings (Model AEWPP9SB)

### SPECIFICATIONS

WITH OPTIONAL BLOWER MODELS		BLOWER CFM	VOLTS	AMPS	DUCT
EB6	WALL OR ROOF MOUNT REMOTE BLOWERS	600 max.	120	0.63 (36", 42")	10-in. round at the hood.  See blower specs for duct requirements.
EB9		900 max.			
EB12		1200 max.			
EB15		1500 max.			
ILB3	ATTIC INSTALLED INLINE BLOWERS	280 max.		0.84 (48", 54")  (lights only) + 6.0 max. (blower only)	
ILB6		600 max.			
ILB9		800 max.			
ILB11		1100 max.			

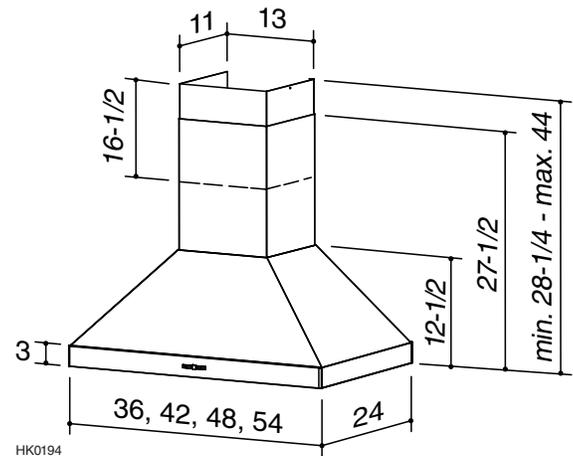

HK0194


NOTE: DIMENSIONS SHOWN ARE IN INCHES




BEST Drummondville, QC, Canada www.BestRangeHoods.ca 866-737-7770

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by <span style="float: right;">Date</span>

# WPP9E SERIES WIRING

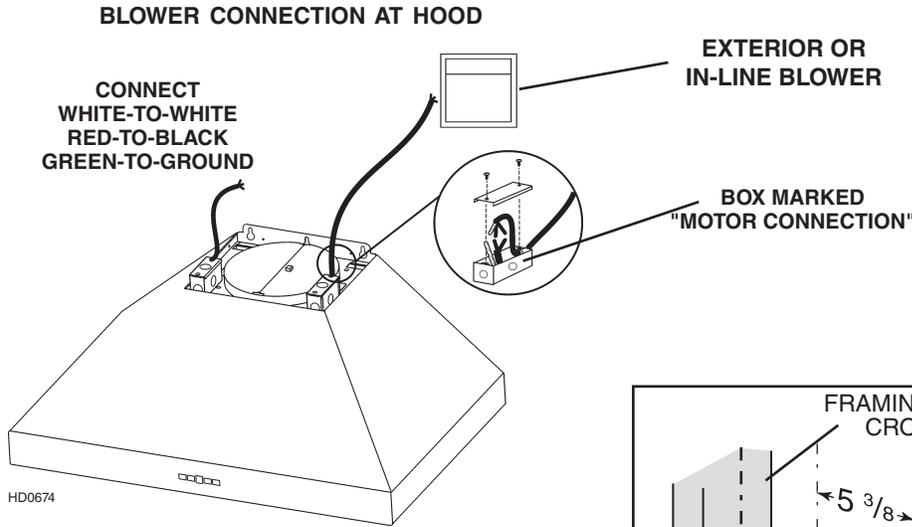

## WPP9E SERIES MOUNTING

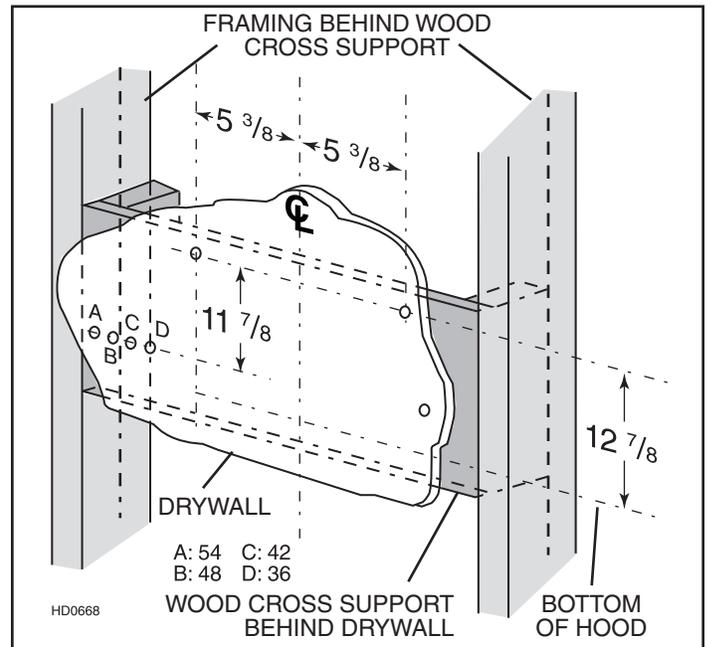

NOTE: DIMENSIONS SHOWN ARE IN INCHES.

CEILING HEIGHT	DUCT METHOD	DISTANCE ABOVE 36" HIGH COOKTOP - TO BOTTOM OF HOOD (see notes below)													
		24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	34"	35"	36"	
8 FEET	Ducted	X	X	X	X	X	X	X	X	X					
	Non-ducted	X	X	X	X	X									
9 FEET	Ducted						X*	X*	X*	X*	X	X	X	X	
	Non-ducted						X	X	X	X	X	X	X	X	
10 FEET (see note b.)	Ducted	X	X	X	X	X	X	X	X	X					
	Non-ducted	X	X	X	X	X	X	X	X	X	X	X			
11 FEET (see note b.)	Ducted									X	X	X	X	X	
	Non-ducted									X	X	X	X	X	

X Mounting height is possible.

X\* Mounting height is possible, but non-duct opening exposed.

■ Mounting height is not possible.

a. Minimum hood distance above cook top must not be less than 24". A maximum of 36" above cooktop is highly recommended for best capture of cooking impurities.

Distances over 36" are at the installer and user's discretion; and if ceiling height and flue length permit.

b. Requires optional 10-ft. to 11-ft. flue extension, ducted model AEWPP9SB or non-ducted model AEWPP9SBN.