

**FEATURES** HOOD:

•

•

•

•

•

•

•

•

Depth - 24"

Bulbs included.)

SOFFIT CHIMNEY:

**AEWP** Series

BACKSPLASH:

excess heat is detected For indoor use only

### SPECIFICATION SHEET

# **CENTRO RANGE HOOD** WP29M SERIES

page 2 when planning your installation.

Widths available - 30, 36, 42, 48, 54, 60"

Dishwasher safe, mesh lined, Hi-Flow<sup>™</sup> baffle filters

Solid-State, infinite speed blower control with speed memory

ANKWP Series (Optional - For use with P3, P6 & iQ6 blowers) • Stainless steel, type 304

Stainless Steel, 20 gauge, type 304

NON-DUCTED RECIRCULATING KIT:

Available for hood widths up to 48"

Widths - 30, 36, 42, 48, 54, 60 Height - 6" or 12" versions Stainless Steel, 22 gauge, type 304



SPECIFICATION: 120 VAC, 60 Hz

BACKSF LAGT.
RMP Series (Optional)
Widths - 30, 36, 42, 48, 54, 60
Stainless steel, 22 gauge, type 430 - protects back wall and

Recommended for use when installation location has no soffit

•

wipes clean easily

1.7 Amps (without blower - 30", 36", 42" widths) •

Two (2) dual position condiment storage shelves


2.5 Amps (without blower - 48, 54, 60, widths) •

BEST Drummondville, QC Canada www.BestRangeHoods.ca 866-737-7770					
REFERENCE	QTY.	REMARKS		Project	
				Location	
				Architect	
				Engineer	
				Contractor	
				Submitted By	Date


PRODUCT SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

WP29Md150904

### - WP29M SERIES RANGE HOOD SYSTEMS -INTERIOR BLOWERS

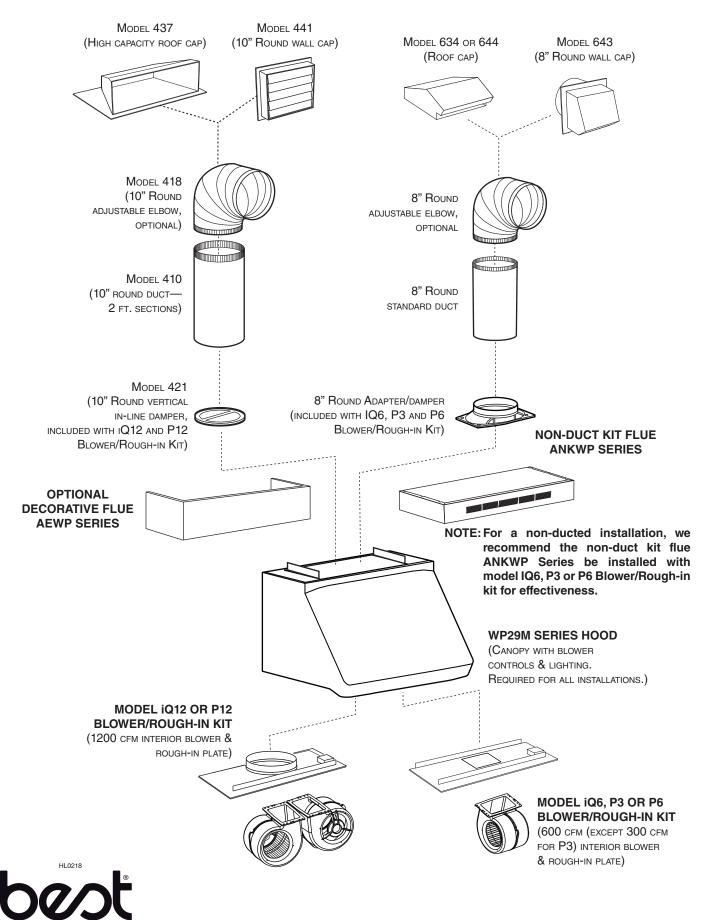

### - WP29M SERIES RANGE HOOD SYSTEMS -IN-LINE AND EXTERIOR BLOWERS

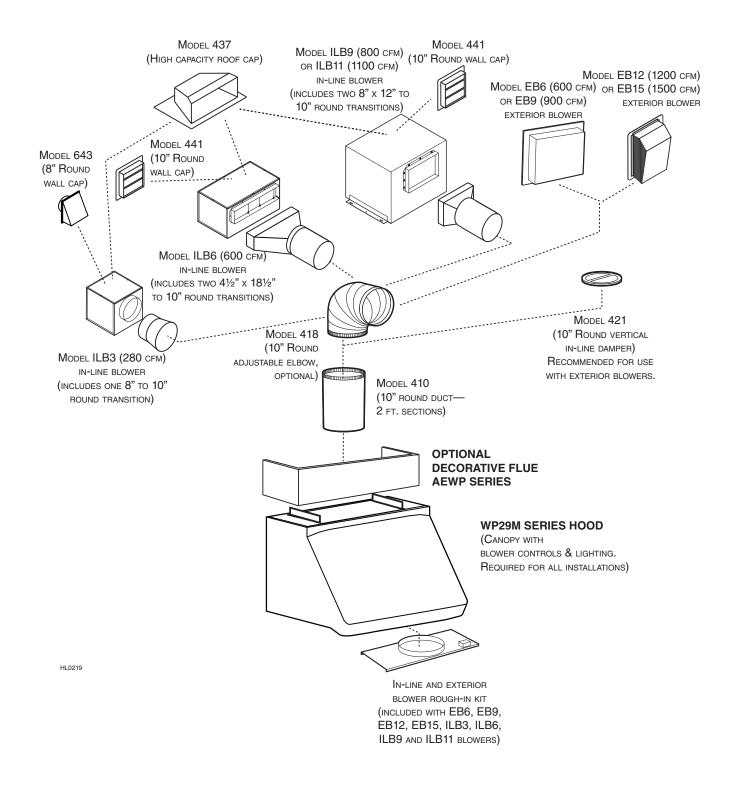




## - WP29M SERIES RANGE HOOD SYSTEM -BLOWER DUCTING POSITION


### **BLOWER DUCTING POSITION**

(Choice of transition will determine the final duct placement.)


### MODEL EB6, EB9, EB12, EB15, ILB3, ILB6, ILB9, ILB11, P12 & iQ12:

Horizontal outlet **back view** 





#### MODEL P3, P6 & iQ6:



HD0609

Note: The electrical box dimensions are 2.5" x 3".

