


# COLONNE WPP9IQ SERIES RANGE HOOD



HB0143

The traditional chimney hood design from Italy has stood the test of time. The Colonne builds on this legacy with a new powerful design that can handle the needs of pro-style cooking.

### FEATURES

- Italian design
- Wall mount
- Finish: 430 Stainless Steel no. 4 Brushed
- Widths: 36", 42", 48", 54"
- Ducted/non-ducted telescopic flue accommodates 8' to 9' ceilings (Purchase non-duct recirculation kit separately.)
- 8" round duct connector/backdraft damper on single blower (10" round on dual blowers)
- 2-level halogen lamps, T4, G9, 25 Watts (3 lamps on 36" & 42" widths, 4 lamps on 48" & 54" widths)
- 3-speed plus boost, electronic pushbutton with display
- Quiet blower system with high-efficiency BLDC motor (iQ6 - 600 CFM - 36" & 42") (iQ12 - 1200 CFM - 36", 42", 48" & 54")
- Heat Sentry™ - automatically turns blower to high speed when excess cooking heat is detected
- Delay timer control automatically shuts off range hood after 10 minutes
- Special control indicates when it's time to clean the filters
- Dishwasher-safe, mesh lined, Hi-Flow™ baffle filters
- For indoor use only

### OPTIONS (Not included with hood. Purchase separately.)

- Non-ducted recirculation kit (Model ANKWPP9 - for single blowers only)
- Charcoal filters (Model AFCROUND2 - for single blowers only)
- Flue extension for 10-ft. to 11-ft. ceilings (ducted Model AEWPP9SB) (non-ducted Model AEWPP9SBN)

### SPECIFICATIONS

BLOWER	VOLTS	AMPS	CFM / SONES (Boost)	CFM / SONES (High Speed)	CFM / SONES (Med. Speed)	CFM / SONES (Low Speed)	DUCT
SINGLE	120	4.5	600 / 8.0	460 / 5.0	290 / 2.0	140 / <0.3	8" round
DUAL	120	8.5	1100 / 10.5	980 / 7.5	640 / 4.0	295 / <0.3	10" round


This product was tested by Broan-NuTone for airflow performance using the ANSI/AMCA 210 Standard, which is equivalent to the Home Ventilating Institute HVI 916 - Procedure for Air Flow Testing, and tested for sound performance using the ANSI S12.51 Standard, which is equivalent to the Home Ventilating Institute HVI 915 - Procedure for Loudness Rating of Residential Fan Products.

BEST Drummondville, QC, Canada www.BestRangeHoods.ca 866-737-7770

iQ6 - (600 CFM) or  
iQ12 (1200 CFM) Blower  
System providing:



- Best in class quiet operation.
- Up to 30% faster smoke and odor removal than comparable models.
- Up to 22x more energy efficient than comparable models.
- Guaranteed Performance System (GPS) technology calibrates the hood system to every installation to provide up to 30% more CFM than standard range hoods.
- Using a duct reducer with this hood may prevent the product from calibrating.

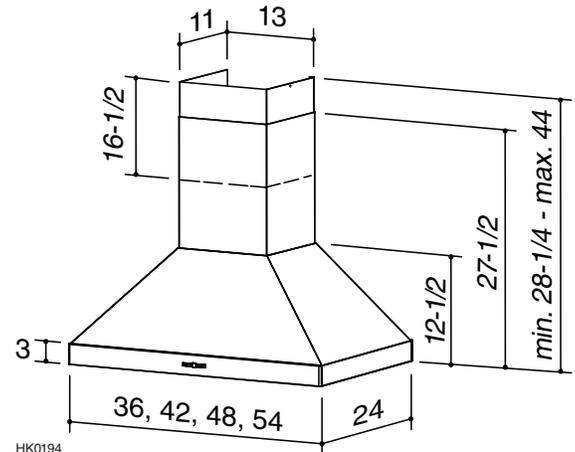


HK0194

NOTE: DIMENSIONS SHOWN ARE IN INCHES




REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

# WPP9IQ SERIES WIRING

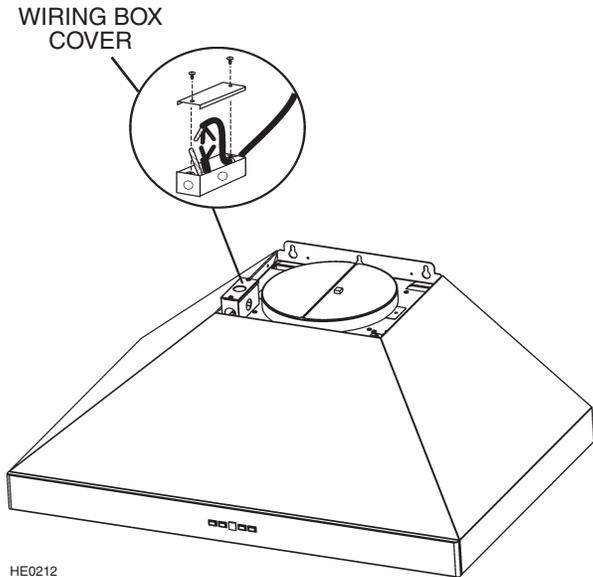

## WPP9IQ SERIES MOUNTING

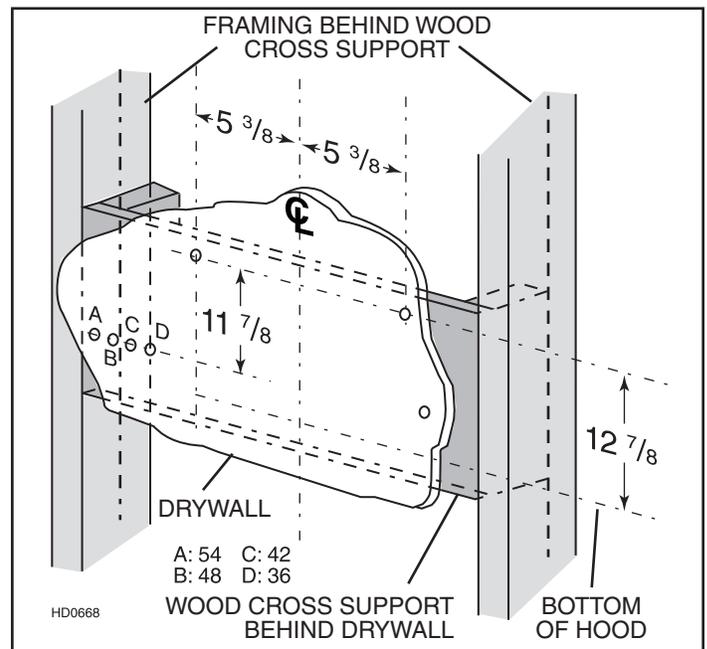

NOTE: DIMENSIONS SHOWN ARE IN INCHES.

CEILING HEIGHT	DUCT METHOD	DISTANCE ABOVE 36" HIGH COOKTOP - TO BOTTOM OF HOOD (see notes below)													
		24"	25"	26"	27"	28"	29"	30"	31"	32"	33"	34"	35"	36"	
8 FEET	Ducted	X	X	X	X	X	X	X	X	X					
	Non-ducted	X	X	X	X	X									
9 FEET	Ducted						X*	X*	X*	X*	X	X	X	X	
	Non-ducted						X	X	X	X	X	X	X	X	
10 FEET (see note b.)	Ducted	X	X	X	X	X	X	X	X	X					
	Non-ducted	X	X	X	X	X	X	X	X	X	X	X			
11 FEET (see note b.)	Ducted									X	X	X	X	X	
	Non-ducted									X	X	X	X	X	

X Mounting height is possible.

X\* Mounting height is possible, but non-duct opening exposed.

■ Mounting height is not possible.

a. Minimum hood distance above cook top must not be less than 24". A maximum of 36" above cooktop is highly recommended for best capture of cooking impurities.

Distances over 36" are at the installer and user's discretion; and if ceiling height and flue length permit.

b. Requires optional 10-ft. to 11-ft. flue extension, ducted model AEWPP9SB or non-ducted model AEWPP9SBN.