T24UW810LS / T24UW810RS UNDER-COUNTER WINE RESERVE WITH GLASS DOOR



MASTERPIECE® SERIES HANDLE







Also Available:

T24UW820LS - Left Hand Door Swing with Professional Series Handle

T24UW820RS - Right Hand Door Swing with Professional Series Handle

T24UW800LP - Left Hand Door Swing, Custom Panel Ready T24UW800RP - Right Hand Door Swing, Custom Panel-Ready

FEATURES & BENEFITS

- Dual zone wine storage with adjustable temperature zones
- Full-extension wine racks
- UV resistant tempered glass door
- SoftClose® door hinges for ultra-smooth closing of the door
- LED theater lighting
- Touch electronic controls for precise temperature management

GENERAL PROPERTIES	
Panel Ready	N/A
UV Resistant Glass Door	Yes
Reversible Door Swing	Left and Right Available
SoftClose® Door Hinges	Yes
Lighting	Adjustable LED Lighting
Full Width Shelves	6
Shelf Material	Wenge Hardwood w/ Aluminum Front Caps
Full Extension Wine Racks	Yes
Dual Zone Wine Storage	Yes
Door Open Alarm	Yes
Touch Electronic Controls	Yes
CAPACITY	
Number of Bottles	41
TEMPERATURE RANGES	
Upper Zone	40°F (3°C) to 52°F (10°C)
Lower Zone	52°F (11°C) to 64°F (18°C)
TECHNICAL DETAILS	
Watts (W)	150 W
	150 W 15 Amp
Watts (W)	
Watts (W) Current (A)	15 Amp
Watts (W) Current (A) Volts (V)	15 Amp 115 V
Watts (W) Current (A) Volts (V) Frequency (Hz)	15 Amp 115 V 60 Hz
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.)	15 Amp 115 V 60 Hz 64"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type	15 Amp 115 V 60 Hz 64"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT	15 Amp 115 V 60 Hz 64" 120V 3-Wire
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.)	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 34 3/4" – 35 1/4" ×
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.)	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 34 3/4" – 35 1/4" × 24 3/16" × 24 9/16"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs)	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 34 3/4" – 35 1/4" × 24 3/16" × 24 9/16"
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 34 3/4" – 35 1/4" × 24 3/16" × 24 9/16" 190 / 205 lbs
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY Annual Energy Consumption	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* × 23 7/8" × 24" 34 3/4" – 35 1/4" × 24 3/16" × 24 9/16" 190 / 205 lbs
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY Annual Energy Consumption WARRANTY Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* x 23 7/8" x 24" 34 3/4" - 35 1/4" x 24 3/16" x 24 9/16" 190 / 205 lbs
Watts (W) Current (A) Volts (V) Frequency (Hz) Power Cord Length (in.) Plug Type DIMENSIONS & WEIGHT Appliance Dimensions (H x W x D) (in.) Required Cutout Size (H x W x D) (in.) Net / Gross Weight (lbs) EFFICIENCY Annual Energy Consumption WARRANTY Limited, Entire Appliance, Parts and Labor on Any Part of the Refrigerator that Fails Because of a Manufacturing Defect Limited Warranty for Sealed Refrigeration	15 Amp 115 V 60 Hz 64" 120V 3-Wire 34 1/4"* x 23 7/8" x 24" 34 3/4" - 35 1/4" x 24 3/16" x 24 9/16" 190 / 205 lbs 227 kWh

*Height adjustable + 1/2" (13 mm) with legs fully extended

Page 1 of 3 11 / 17


^{**}Sealed refrigeration system includes compressor, evaporator, condenser, dryer / strainer and connection tubing

T24UW810LS / T24UW810RS UNDER-COUNTER WINE RESERVE WITH GLASS DOOR




MASTERPIECE® SERIES HANDLE


GLASS DOOR WINE RESERVE PRODUCT DIMENSIONS

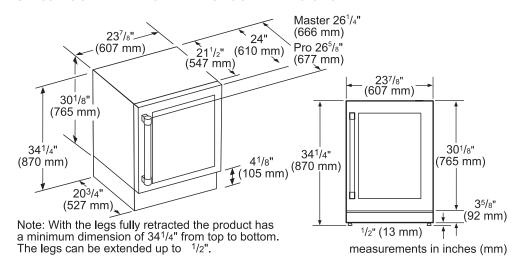

GLASS DOOR WINE RESERVE CUTOUT DIMENSIONS




measurements in inches (mm)



measurements in inches (mm)

GLASS DOOR WINE RESERVE CUTOUT DIMENSIONS & ELECTRICAL LOCATION

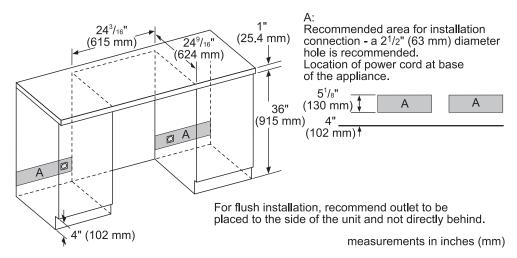


Page 2 of 3


T24UW810LS / T24UW810RS UNDER-COUNTER WINE RESERVE WITH GLASS DOOR




MASTERPIECE® SERIES HANDLE

GLASS DOOR WINE RESERVE CUTOUT & DOOR SWING DIMENSIONS

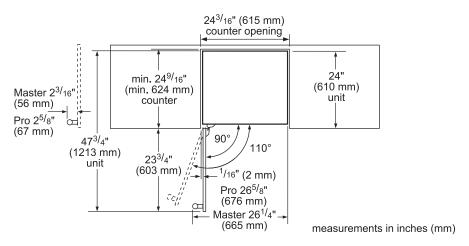

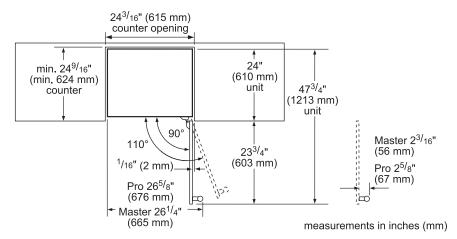

GLASS DOOR WINE RESERVE SIDE-BY-SIDE INSTALLATION

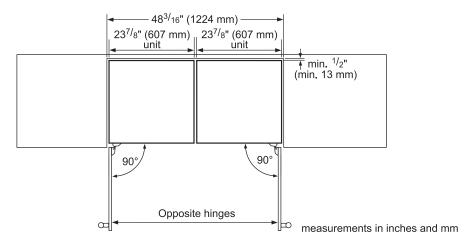

These warranties give you specific legal rights and you may have other rights that vary from state to state. Full warranty and limited warranty from date of installation. For complete warranty details, refer to your Use & Care manual, or ask your dealer.

Specifications are for planning purposes only. Refer to installation instructions and consult your countertop supplier prior to making counter opening. Consult with a heating and ventilation engineer for your specific ventilation requirements. For the most detailed information, refer to installation instructions accompanying product or write to Thermador indicating the model number. Specifications are correct at time of printing. Thermador reserves the right to change product specifications or design without notice. Some models are certified for use in Canada. Thermador is not responsible for products that are transported from the U.S. for use in Canada.

1 800 735 4328 | USA THERMADOR.COM | CANADA THERMADOR.CA | @2017 BSH HOME APPLIANCES CORPORATION. ALL RIGHTS RESERVED.

Page 3 of 3