

24" ADA Solid Door Refrigerator • ADA Series



STAINLESS
SOLID (LOCK)



INTEGRATED
SOLID



BLACK
SOLID (LOCK)

FEATURES & BENEFITS


| | |
|-------------------|--|
| PERFORMANCE | <ul style="list-style-type: none">• Volume of 5.3 cu ft holds up to 70 bottles (12 oz) or 140 cans (12 oz)• Digital Touch Pad Control is conveniently located on upper face of unit• Temperature range: 34°F - 45°F• Convection cooling system rapidly and efficiently takes items to the set temperature |
| INTERIOR/EXTERIOR | <ul style="list-style-type: none">• 32" height meets ADA height requirement yet maximizes allowable space• White interior is illuminated with LED lighting• Three adjustable glass shelves• Stainless steel handle (7/8" diameter)• Door swing is field reversible, and is shipped right-hand hinged• Door lock is standard on stainless and black models |
| INTEGRATION | <ul style="list-style-type: none">• Unit is designed to be built-in or can be freestanding• Four independently adjustable leveling legs provide a precise undercounter fit• Available in the following finishes: Stainless, Integrated, or Black• Integrated model requires 3/4" custom door panel (panels not supplied by U-Line) |

MODEL DETAILS


| Model | Voltage/Hz | Door Swing | Finish | Shipping Weight |
|-----------------|------------|------------------|------------------------|-----------------|
| U-ADA24RS-13B | 115 / 60 | Field Reversible | Stainless Solid (Lock) | 123 lb |
| U-ADA24RINT-00A | 115 / 60 | Field Reversible | Integrated | 117 lb |
| U-ADA24RB-13B | 115 / 60 | Field Reversible | Black Solid (Lock) | 123 lb |

DIMENSIONS

Dimensions shown apply to all finishes, including Integrated (INT) models with 3/4" integrated panel/frame installed.

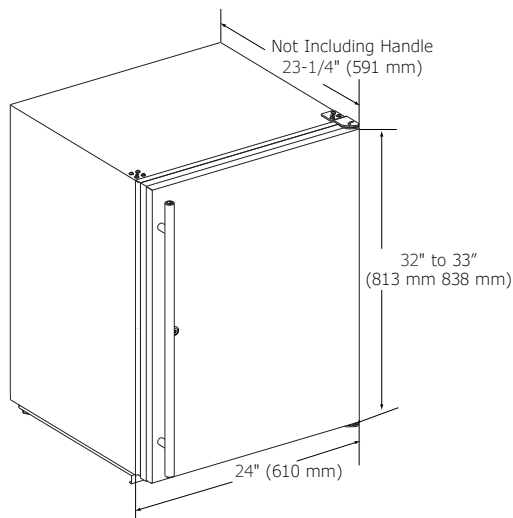

CABINET CUT-OUT

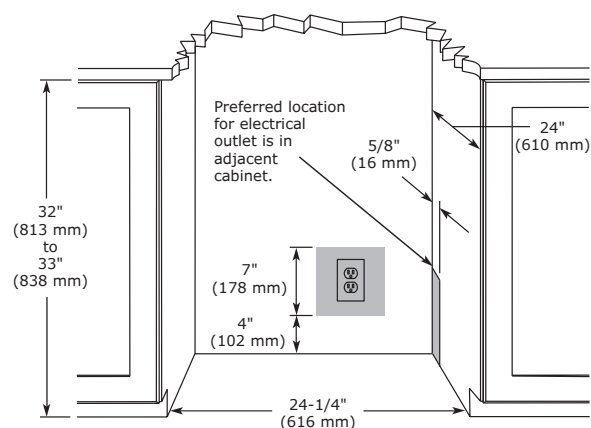

INSTALLATION NOTES

When installing adjacent to wall, ensure 2 1/2" clearance on hinged side for 90° door opening, allowing ample room for door handle.

Cutout includes the additional 1/4" width overall to ensure proper installation.


No additional clearance around sides, top or rear of unit is needed for ventilation.

Do not obstruct front grille air flow.

SPECIFICATIONS

| | |
|-----------------------------------|----------------------|
| Model | ADA24R |
| Amps: Running | 1.2 |
| Capacity: Bottle (12 oz) | 70 |
| Capacity: Can (12 oz) | 140 |
| Capacity: Volume (cu ft) | 5.3 |
| Control Type | Digital Touch Pad |
| Dimensions: Product Depth | 23 1/4" / 591 mm |
| Dimensions: Product Height | 32" / 813 mm |
| Dimensions: Product Width | 24" / 610 mm |
| Energy Consumption: Avg. Per Year | 240 kWh |
| ENERGY STAR / CEE RATING | ENERGY STAR / Tier 3 |
| Panel Height | 30 1/4" / 768 mm |
| Panel Thickness | 3/4" / 20 mm |
| Panel Type | Solid Panel |
| Panel Width | 23 3/4" / 603 mm |
| Product Weight: Max | 117 lb |
| Refrigerant Type | R600a |
| Sabbath (Star K Certified) | Yes |
| Temperature Range | 34°F - 45°F |

COOLING SYSTEM



ELECTRICAL REQUIREMENTS

This unit requires a grounded, polarized 115 VAC, 60 Hz, 15 A power supply (normal household current).



Please visit u-line.com to view this model's User Guide & Service Manual. All Specifications are subject to change without notice.