



## 6 SERIES BUILT-IN ELECTRIC 30"W. OVENS

VIKING VIRTUOSO 6 SERIES – MVSOE/MVDOE

### FEATURES AND FUNCTIONS

- State-of-the-art color interface controls both ovens
- New, transitional design fits perfectly in today's transitional/contemporary kitchens
- Can be installed flush or standard mount
- Two speed convection system circulates air throughout the entire oven cavity
- Concealed 6 pass bake element makes clean-up easy
- 10-pass broiler with heat reflector
- Two halogen oven lights
- Two Full-Extension TruGlide™ racks, one standard/five porcelain coated rack positions (both ovens of double oven)
- Digital clock/oven functions
- 100 minute timer
- Set cooking time for up to 12 hours
- Delay timed cooking feature
- Tone and digital display indicate pre-set cooking time is finished
- Meat probe - timer sounds and oven shuts off when desired temp is reached Only in upper oven of double oven
- Self-Clean ovens
- Oven functions
  - Two element bake
  - Convection bake
  - TruConvec™ convection cook (element around fan)
  - Convection roast
  - Convection broil
  - Hi broil
  - Med broil
  - Low broil
- Extra large self-cleaning ovens
  - Overall - 25"W. x 16"H. x 18 ½"D. – 4.3 cu. ft.
  - AHAM standard - 25"W. x 16"H. x 16 ¾"D. – 3.8 cu. ft.
- Can be installed flush or standard mount

### EASY MAINTENANCE AND CLEANUP

- Extra large self-clean convection oven
- Concealed six-pass bake element makes cleaning bottom of oven easy
- Durable metal die-cast knobs with child-proof, push-to-turn safety feature



**MVSOE630**



**MVDOE630**

### MODEL NUMBERS

- MVSOE630SS – 30"W. Single Oven
- MVDOE630SS – 30"W. Double Oven

### COLOR FINISHES

Available in Stainless Steel

### WARRANTY

- 2-year full - complete product
- 90-day full - cosmetic parts such as glass, painted items and decorative items
- 5-year limited - electric heating elements




## 6 SERIES BUILT-IN ELECTRIC 30"W. OVENS

VIKING VIRTUOSO 6 SERIES – MVSOE/MVDOE

ELECTRIC OVENS		
DESCRIPTION	MVSOE630	MVDOE630
Overall Width	29-3/4" (75.6 cm)	
Overall Height	29-3/8" (74.6 cm)	51-3/8" (130.5 cm)
Overall Depth To front of glass door To front of handle	24" (61.0 cm) 26-7/16" (67.2 cm)	
Cutout Width Standard Mount Flush Mount	28-1/2" (72.4 cm) 30" (76.2 cm)	
Cutout Height Standard Mount Flush Mount	28-1/4" (71.8 cm) 29-1/2" (74.9 cm)	50-5/8" (128.5 cm) 51-1/2" (130.8 cm)
Cutout Depth	24" (61.0 cm)	
Electrical Requirements	4-wire ground, 240 VAC, 30 amp electrical connection for single ovens/ 50 amp for double ovens. Unit is equipped with No. 10 ground wire in conduit. Should be fused separately.	
Maximum Amp Usage	240 VAC - 24.0 amps 208 VAC - 20.8 amps	240 VAC - 40.0 amps 208 VAC - 34.7 amps
Interior Dimensions	25"W. (63.5 cm) x 16"H. (40.6 cm) x 18-1/2"D. (50.0 cm)	
Oven Volume	(AHAM Standard) 3.8 cu. ft.; Total Oven Cavity 4.3 cu. ft	
Approximate Shipping Weight		

Please do not prepare installation from brochure data only. See installation instructions for important clearance/installation information.

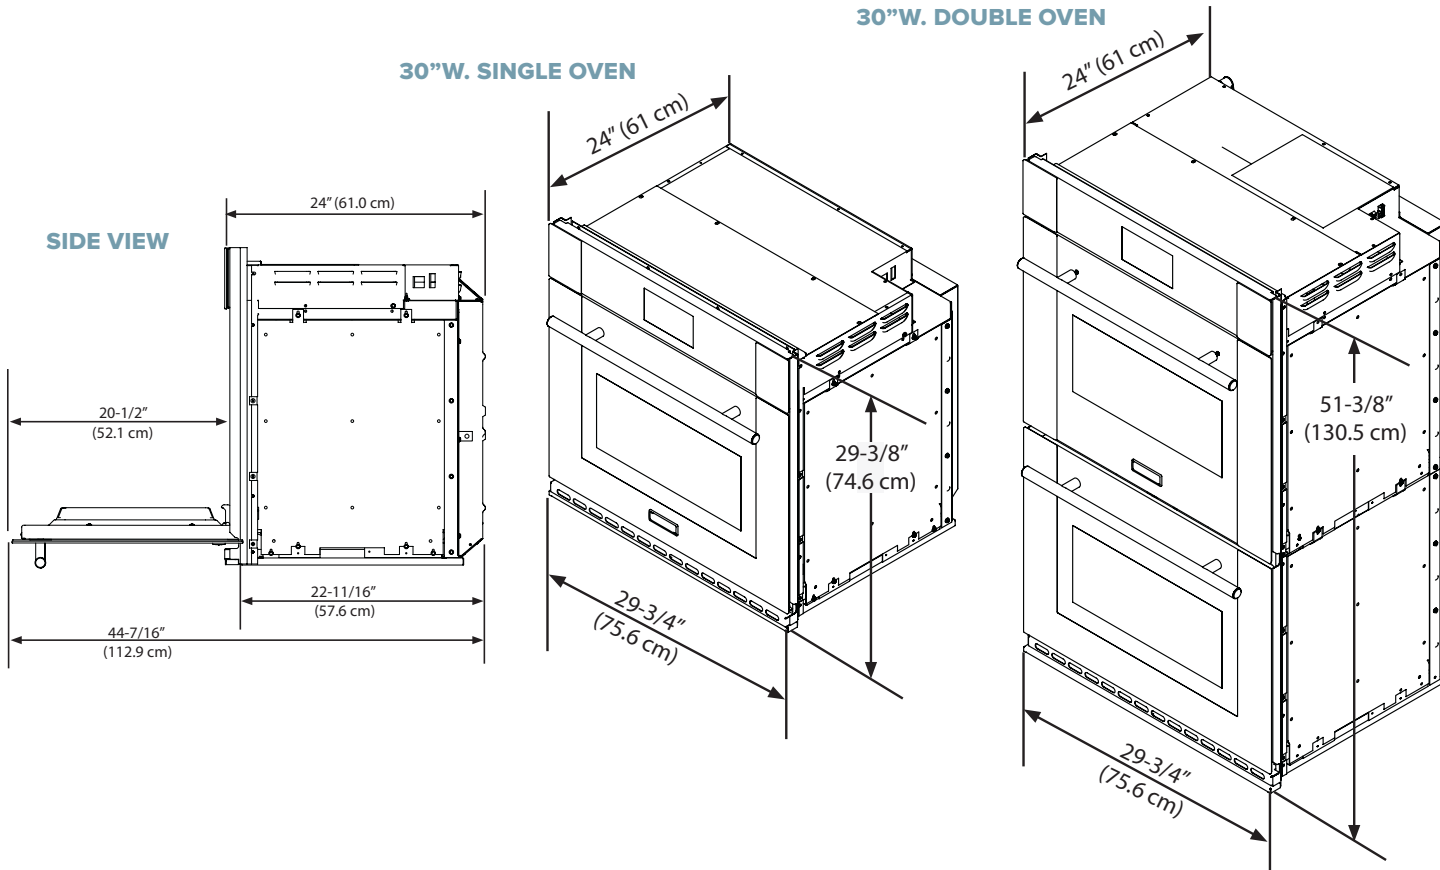




## 6 SERIES BUILT-IN ELECTRIC 30"W. OVENS



VIKING VIRTUOSO 6 SERIES – MVSOE/MVDOE

### CUTOUT DIMENSIONS - STANDARD

#### 30"W. DOUBLE OVEN

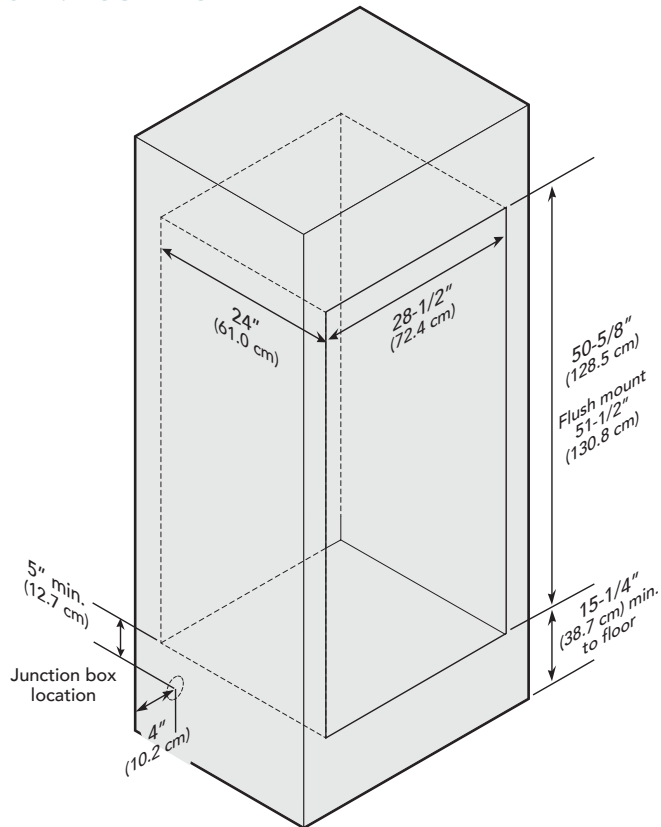

#### 30"W. SINGLE OVEN

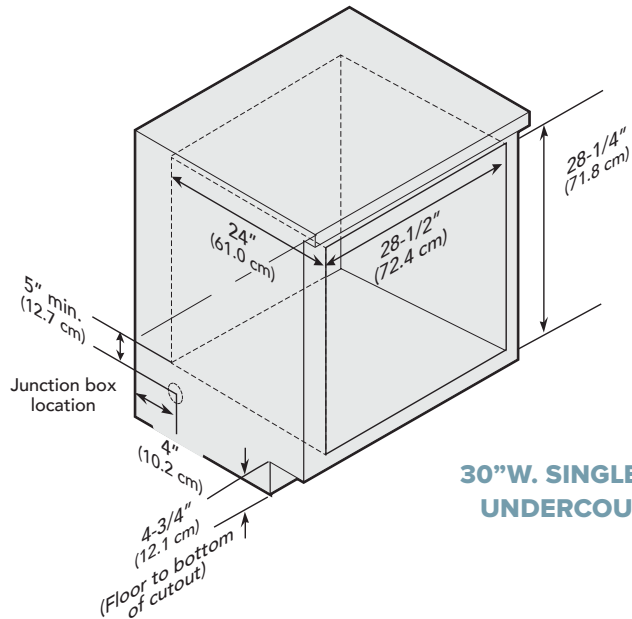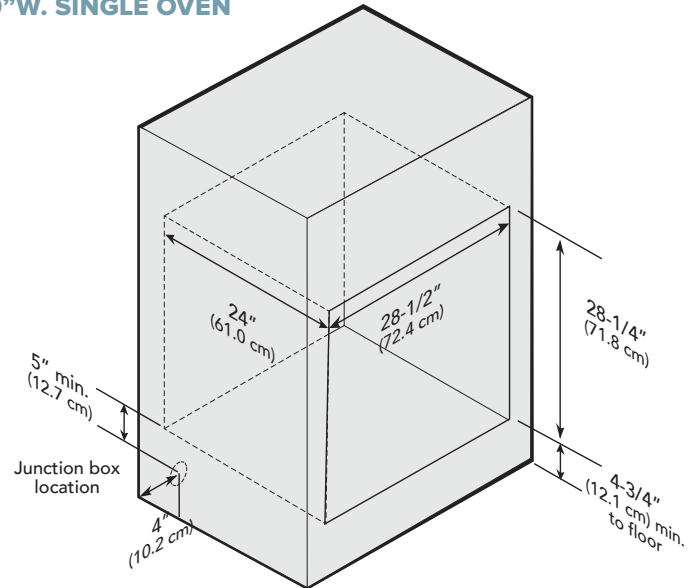

#### 30"W. SINGLE OVEN UNDERCOUNTER




## 6 SERIES BUILT-IN ELECTRIC 30"W. OVENS


VIKING VIRTUOSO 6 SERIES – MVSOE/MVDOE

### CUTOUT DIMENSIONS - FLUSH MOUNT


#### 30"W. DOUBLE OVEN

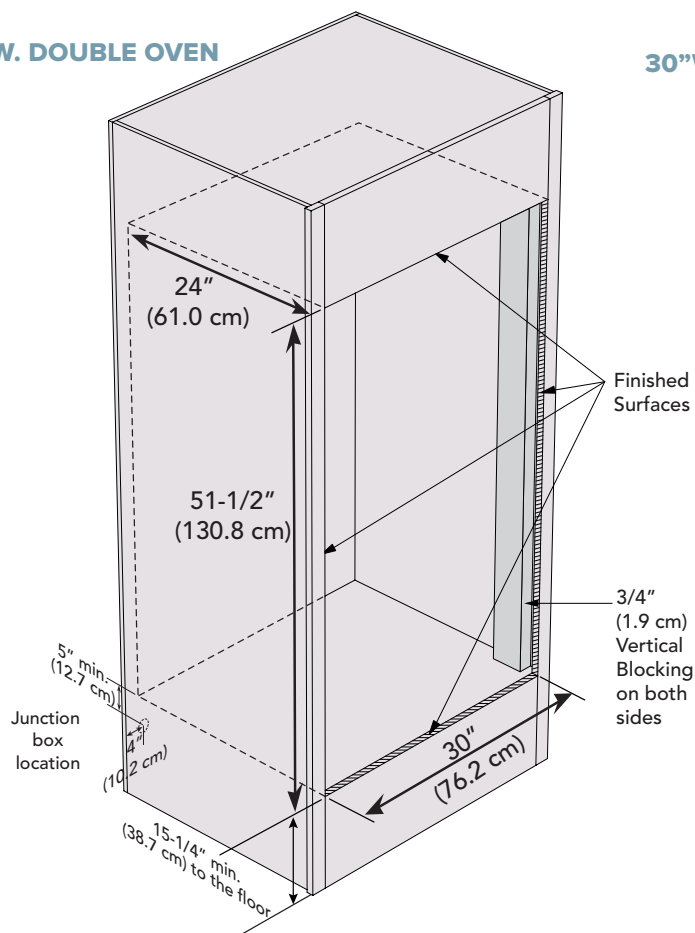


#### 30"W. SINGLE OVEN

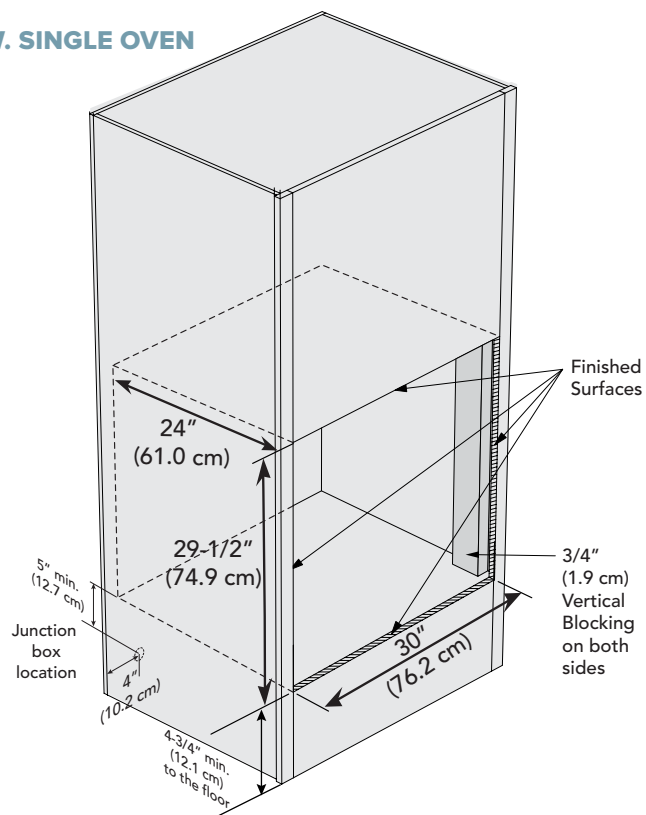

#### 30"W. SINGLE OVEN UNDERCOUNTER

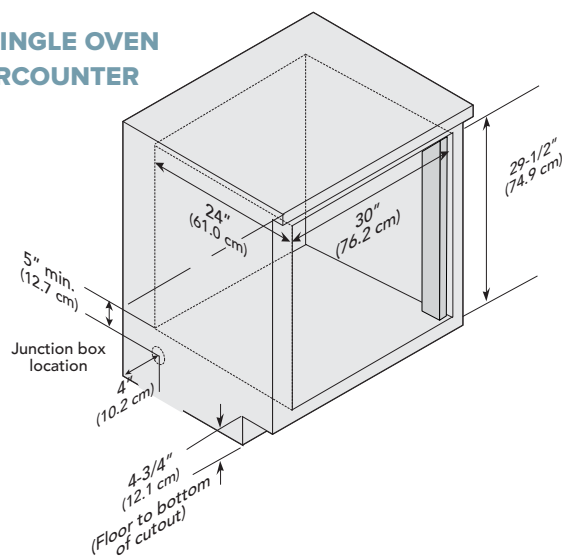

#### TOP VIEW

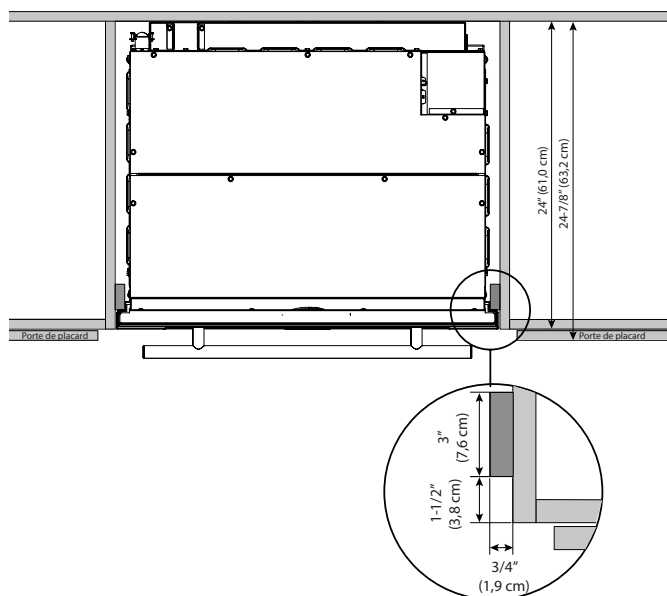

VIKING RANGE, LLC 111 FRONT STREET GREENWOOD, MISSISSIPPI 38930 USA

For detailed product information, model numbers, or to request a quote call 1-888-845-4641 or visit [vikingrange.com](http://vikingrange.com)

© 2018 Viking Range, LLC All rights reserved. Specifications subject to change without notice.