

CORE

BREEZE II

UNDER-CABINET

Updated with dual-level BriteStrip™ LED lighting the Breeze II's modern, clean lines provide a perfect complement to any interior. Equipped with 3-speed electronic controls, 400-CFM blower, convenient dishwasher-safe

aluminum filters and an auto delay-off feature that clears the air and powers down after 5 minutes. Available in black, white, stainless steel and black stainless finishes.

ZEPHYR

ZEPHYRONLINE.COM



Stainless Steel




Black Stainless




Black




White

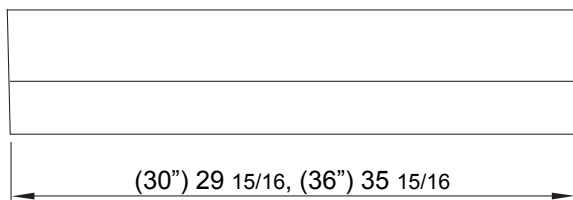

Front

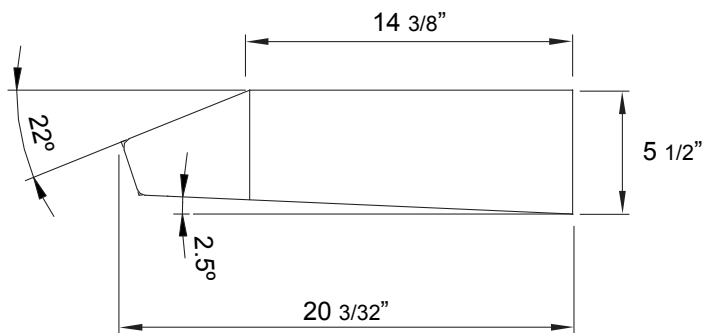

Side

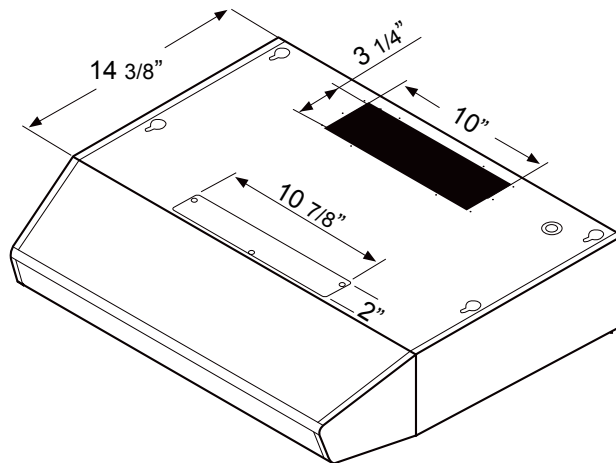

Top

MODEL		
Black	AK1200BB	AK1236BB
White	AK1200BW	AK1236BW
Black Stainless	AK1200BBS	AK1236BBS
Stainless Steel	AK1200BS	AK1236BS
Size		
Blower CFM (Min. - Max.)	30" (29-15/16")	36" (35-15/16")
Sones (Min. - Max.)	175 - 400	175 - 400
	1.9 - 4.5	1.9 - 4.5
FEATURES		
Controls	Electronic Touch	Electronic Touch
Speed Levels	3	3
Auto Delay-Off	Yes	Yes
Lighting	BriteStrip™ LED x1	BriteStrip™ LED x1
Dual-Level Lighting	Yes	Yes
Filters	Aluminum Mesh x2	Aluminum Mesh x2
Recirculating Option	Yes	Yes
DUCT SPECIFICATIONS		
Vertical Internal Blower	3-1/4" x 10"	3-1/4" x 10"
Horizontal Internal Blower	3-1/4" x 10"	3-1/4" x 10"
AC POWER	120V, 60Hz at Max. 0.8A	120V, 60Hz at Max. 0.8A
OPTIONAL ACCESSORIES		
Recirculating Kit	OAK11-21001	OAK11-21001
MOUNTING HEIGHT RANGE*		
	24" - 32"	24" - 32"
WARRANTY		
	3 years parts, 1 year labor	3 years parts, 1 year labor

*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.