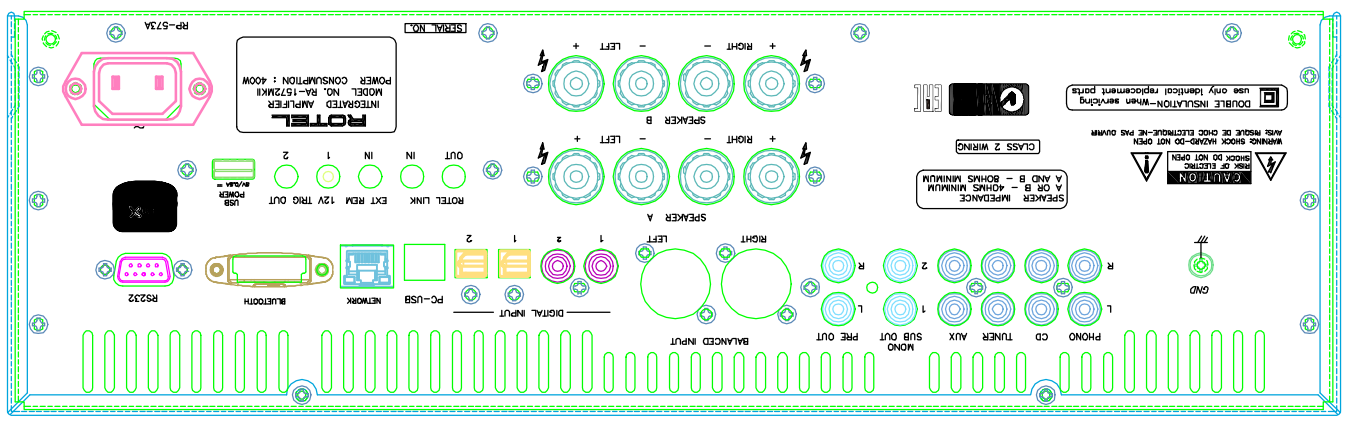
PHONO
CD
TUNER
AUX
MONO SUB OUT
PRE OUT
BALANCED INPUT
DIGITAL INPUT
PC-USB
NETWORK
BLUETOOTH
RS232
GND
SPEAKER A
SPEAKER B
ROTEL LINK
EXT REM
12V TRIG OUT
USB POWER
CAUTION
RISK OF ELECTRIC SHOCK DO NOT OPEN
WARNING: SHOCK HAZARD-DO NOT OPEN
AVIS: RISQUE DE CHOC ELECTRIQUE-NE PAS OUVRIR
SPEAKER IMPEDANCE
A OR B – 4OHMS MINIMUM
A AND B – 8OHMS MINIMUM
CLASS 2 WIRING
DOUBLE INSULATION–When servicing use only identical replacement parts
ROTEL
INTEGRATED AMPLIFIER
MODEL NO. RA-1572MKII
POWER CONSUMPTION : 400W
SERIAL NO.
RP-573A

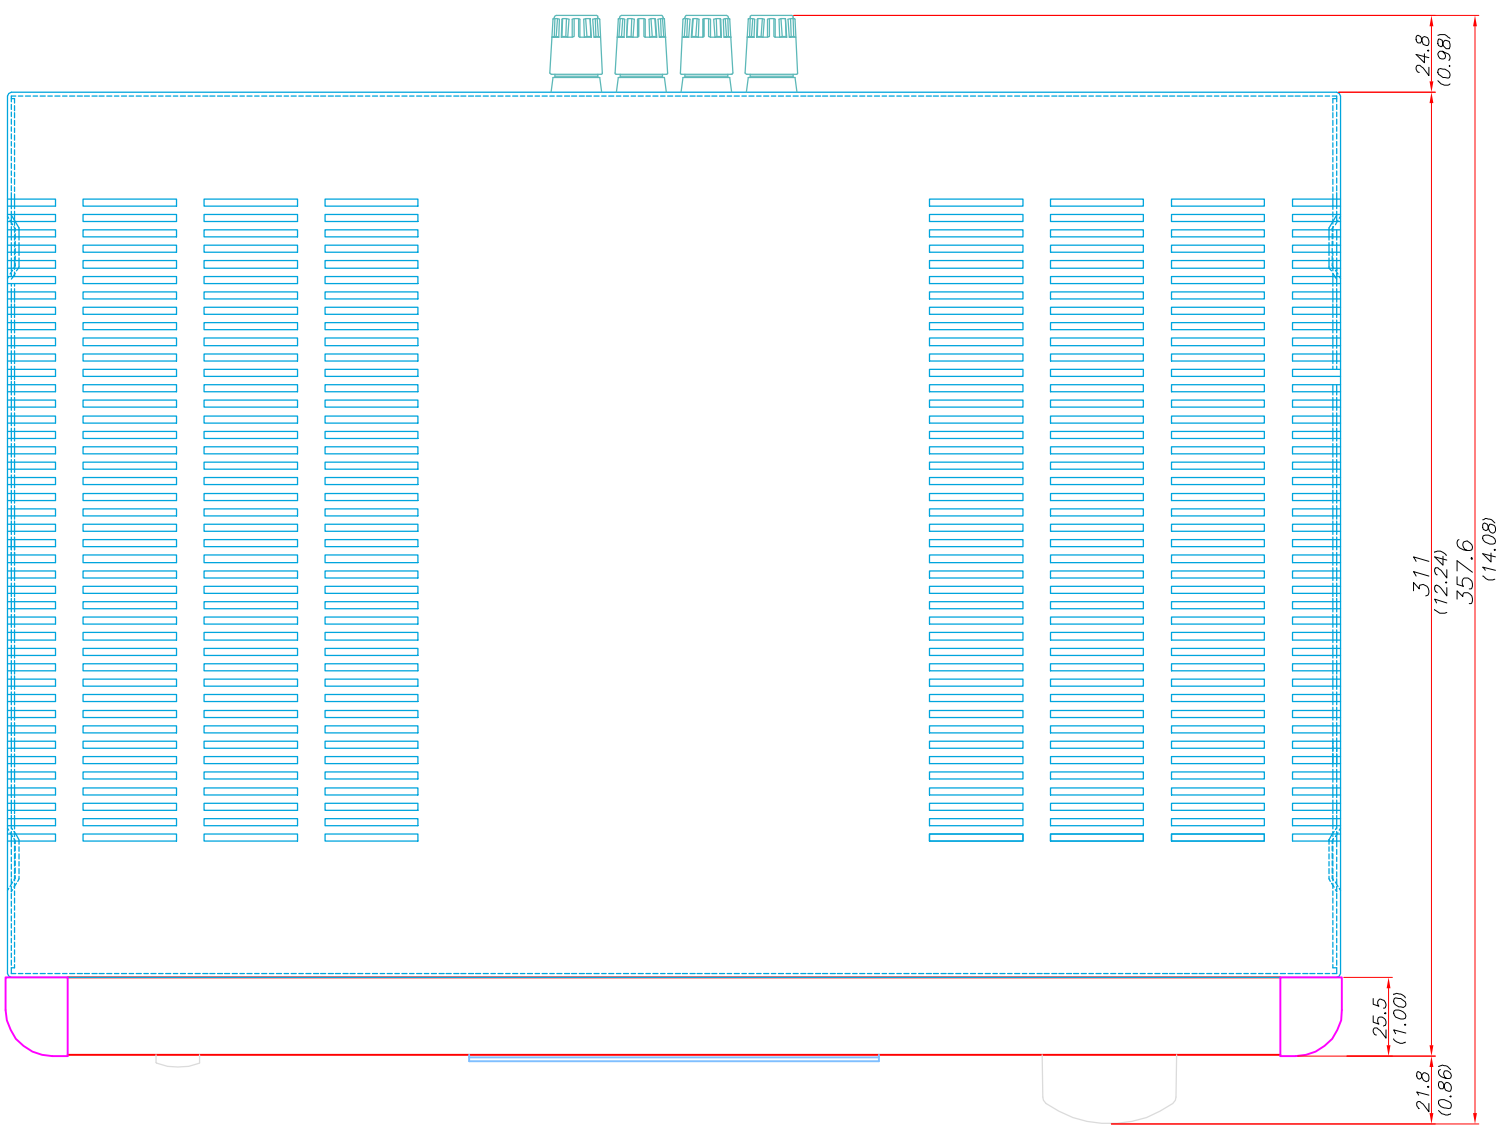
24.8
(0.98)
311
(12.24)
357.6
(14.08)
25.5
(1.00)
21.8
(0.86)

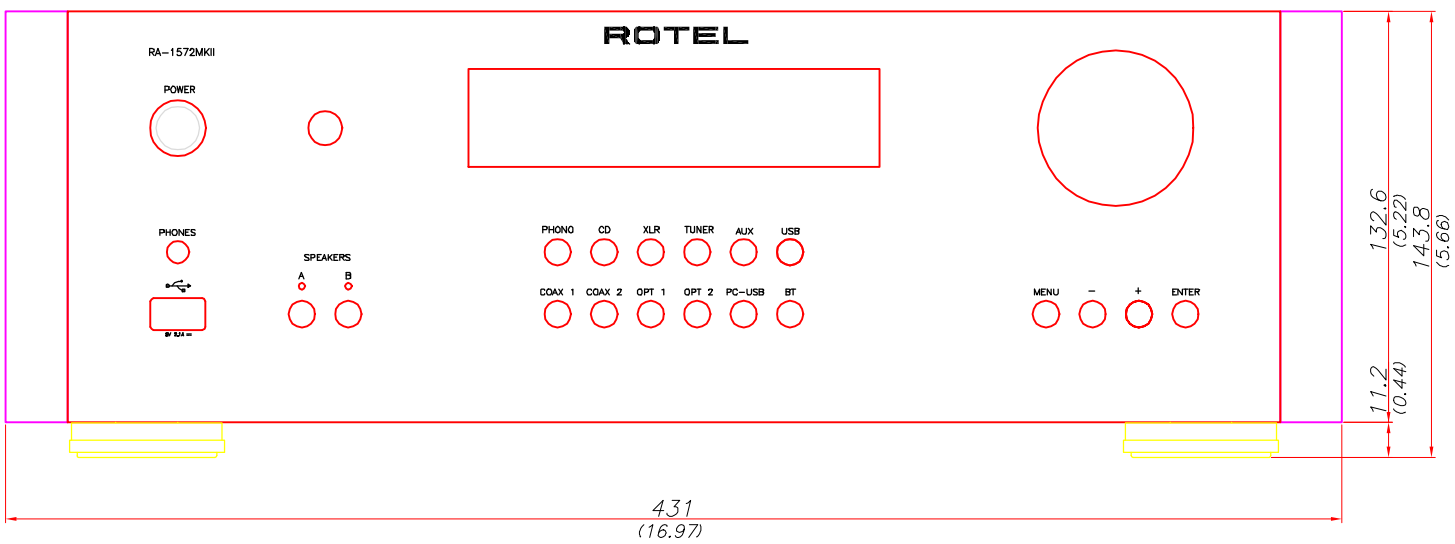
ROTEL
RA-1572MKII
POWER
PHONES
SPEAKERS
A
B
PHONO
CD
XLR
TUNER
AUX
USB
COAX 1
COAX 2
OPT 1
OPT 2
PC-USB
BT
MENU
–
+
ENTER
132.6
(5.22)
143.8
(5.66)
11.2
(0.44)
431
(16.97)