

500 Series, Single Wall Oven, 30", Stainless steel HBL5344UC





The Bosch All-in-One Wall Oven combines all your favorite kitchen tools into one appliance for the ultimate cooking versatility without the countertop clutter.

- **Pyrolytic self-cleaning:** Automatically cleans the oven, just wipe out the ash.
- Heavy-duty Metal Knobs for a Premium Look and Feel.

Technical Data

Cooking mode : Conventional heat, Half width grill, warming Integrated Cleaning system : Self Clean Interior Lights - cavity 1 : 1 Timer settings : Alarm, Off, On, timer Included accessories : 1 x oven racks /upper Bake Element Wattages cavity 1 : 2400 W Broil Element Wattages cavity 1 : 3800 W

Included accessories 1 x oven racks /upper

Optional accessories HEZTR301 : Telescopic Oven Rack 30"



500 Series, Single Wall Oven, 30", Stainless steel HBL5344UC

The Bosch All-in-One Wall Oven combines all your favorite kitchen tools into one appliance for the ultimate cooking versatility without the countertop clutter.

Design

- Bosch black stainless steel is a special material that helps guard against scratches and fingerprints
- Industrial-style design heavy-duty metal knobs have a premium look and feel

Performance

- Concealed bake element is protected by a porcelain cavity liner making wiping up food spills easier
- A 12 pass broil element sears, browns, and chars meats and casseroles to perfection
- Keep food warm without overcooking until ready to serve by using the warm mode

Efficiency

- 2, 3, and 4 hour self-clean cycles available, saving time and energy

Convenience


- Large transparent oven window lets you easily monitor the cooking progress without opening the door
- 1 interior oven light provides visibility into the cavity so you can see your meal's cooking progress
- Comes with 2 standard racks that can be placed into 6 different rack positions - perfect for a variety of baking needs

Capacity

- 4.6 cu. ft. generous interior capacity fits a large turkey and multiple side dishes with ease




500 Series, Single Wall Oven, 30", Stainless steel HBL5344UC



* Installation not recommended

measurements in inches (mm)





19¹/4" (488) * 27-28⁵/8" (686-727) min. 4³/4"-max. 18" (121-456)

*Junction box may be located above or next to the unit within the reach of the power cable. *Junction box may be located below (depending on space) or next to the unit within the reach of the power cable. *Most combinations available as combo oven (one cut-out, one electrical hook-up). Minimum dimension between cut-outs: 1" (25 mm) for wall oven cut-out height of 28⁵/s" 2⁵/s" (67 mm) for wall oven cut-out height of 27"

measurements in inches (mm)


Flush installation Speed oven or microwave above a 30" single oven** Side view 1" (25) Cleats 20¹/8" (511) flush cut-out height Cleats 29¹/8" (740) flush cut-out height Wall oven *IMPORTANT: Base has to be able to support the weight of the oven. Please check oven manual for minimum weight requirements. $-\frac{24^{1}/2''}{(622)}$

Speed oven or microwave *Flush installation requires a base plate underneath the body: 30" products – Dimensions: H $^5/_{16}$ (8) x W 28 $^1/_2$ " (724) x D 22 $^1/_2$ " (571) minimum 1/2" (13) required

*Most combinations available as combo oven (one cut-out, one electrical hook-up).


measurements in inches (mm)

Standard installation 30" single oven over storage or warming drawer



>	*Wall oven junction box may be located above or to the right or left of the unit within reach of the power cable.
	**Electrical hook-up may be located below (depending on space) or next to the drawer within reach of the power cable.
>	minimum ³ /4" (18) required between cut-outs


measurements in inches (mm)



measurements in inches (mm)




500 Series, Single Wall Oven, 30", Stainless steel HBL5344UC

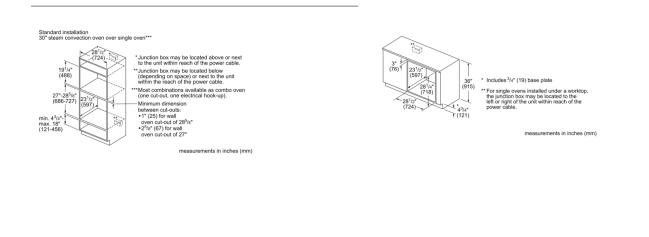



For single ovens installed in a wall cabinet, the junction box may be located above or beneath the unit within reach of the power cable


measurements in inches (mm)



measurements in inches (mm) Standard side-by-side-by-side inst $\begin{array}{c} 30^{\circ} & 30^{\circ} \\ \hline (762) & & & & & & & \\ 3^{\circ} & & & & & & \\ 3^{\circ} & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & & & \\ 3^{\circ} & & & & & \\ 3^{\circ} & & & & & & \\ 3^{$ 28½" (724) 28½" (724) 28½" (724) 29³/₄" (755) - (755) (755) (755) 1/4" (6) 29¾" (755) 29¾" (755) Configuration Side-by-side-by-side 1 Side-by-side-by-side 2 A D E E C D E

Left oven type Middle oven type Right oven type Conventional over ABCDEF

speed or n tional over nicrowave n. Bottom hinge door modules only. of recommended



A: Left reveal clea B: Right reveal clea C: Cut-out width D: Cut-out width E: Cut-out width F: Installation not mmended