

# SEU122B



Product Family  
Built-in type  
Dimensions  
Power supply  
Type  
EAN code

Hob  
Ultra-low profile  
12"  
Electric  
Ceramic  
8017709240929



## Aesthetics



|                         |             |
|-------------------------|-------------|
| Colour                  | Black       |
| Finishing               | Glass       |
| Aesthetics              | Universale  |
| Material                | Glass       |
| Glass type              | Ceramic     |
| Glass edge              | Angled edge |
| Type of control setting | Digi Touch  |
| Control knob position   | Front       |
| Serigraphy colour       | Grey        |

## Programs / Functions



|                                   |   |
|-----------------------------------|---|
| Total no. of cook zones           | 2 |
| No. of ceramic cook zones         | 2 |
| No. of cooking zones with booster | 2 |
| Power levels                      | 9 |

## Technical Features



Front-centre - Ceramic - Single - 1.00 kW - Ø 14.8 cm  
Rear-centre - Ceramic - Single - 1.40 kW - Ø 18.4 cm

Residual heat indicator Yes


Automatic switch off when overheat Yes

Automatic switch off when overflow Yes

## Electrical Connection

Electrical connection rating (W) 2400 W  
Current 22 A  
Voltage (V) 120 V  
Type of electric cable Single phase

Frequency (Hz) 60 Hz  
Power supply cable length 47 1/4 "  
Terminal box 3 poles

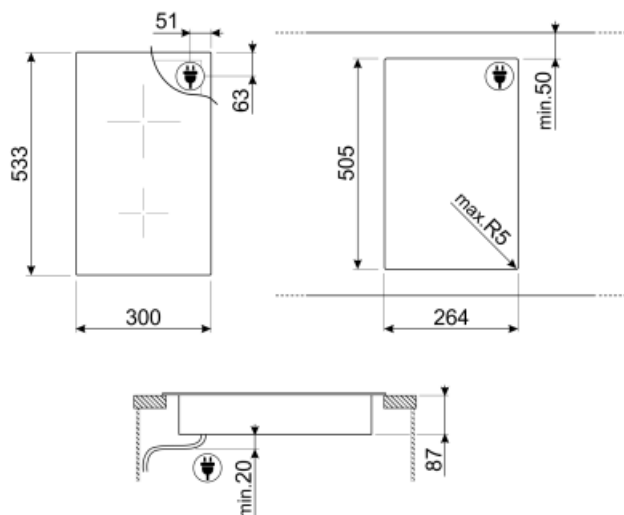

---

## Not included accessories








---



### SCRP

Non-scratch hob scraper - suitable for induction and ceramic hobs

## Symbols glossary (TT)

|  |   |   |   |
|--|---|---|---|
|  | Power booster: option allows the zone to work at full power when very intense cooking is necessary.   |  | Ultra-low profile: Installation of product with flat edge - height of 1 mm.   |
|  | Touch control   |  | Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit. |
|  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light.  |  | Overfill protection: The special overfill protection shuts down the stove in the presence of overflow of liquids.       |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |   |   |