



Innovative personality.

Valentina Plus Insert offers a polished, contemporary look with lasting appeal. Seamlessly integrated and softly illuminated with dynamic lighting, it combines effortless style with SRS technology for a quieter, more comfortable cooking experience.

<i>EAN code</i>	<i>8034122370347</i>
<i>Model Code</i>	<i>FIVAL34B6MB-R Built-in - 34 " (87 cm) - black - 600 CFM</i>
<i>Collection</i>	<i>Built-in</i>

FEATURES AND PROPERTIES

<i>Materials/Finishes</i>	<i>Matte black painted steel</i>
<i>Lighting</i>	<i>Strip LED</i> <i>Dynamic Light (2700K - 5600K)</i>
<i>Control</i>	<i>Electronic control</i>
<i>Installation type</i>	<i>Insert</i>
<i>Ducting type</i>	<i>External ducting/Recirculating</i>
<i>Filters</i>	<i>Metallic grease filter, removable and washable</i> <i>Charcoal filter (optional)</i>
<i>*Chimney</i>	<i>Possible to duct wall mounted from rear</i>
<i>Dimensions</i>	<i>34 in</i>
<i>Features</i>	<i>Perimeter suction</i> <i>Possible to duct wall mounted from rear</i> <i>SRS Speed reduction system</i>

OPTIONAL ACCESSORIES

<i>Code</i>	<i>Description</i>
103050091	FFCHAR3C0BL - Round charcoal filter Ø 6" - Type 6
101080141	Metallic filter aluminium base (Valentina Ins. 87) 239x190,3

OPTIONAL ACCESSORIES

Code	Description
105080053	Remote control
KACL.815	Protective cleaning cloths for stainless steel (box 10 pcs)

ELECTRICAL CONNECTION AND CONSUMPTION

Maximum consumption	340W
Voltage/Frequency	110-120V 60Hz
Connection type	Hood comes standard with Nema 5-15P power cord

BLOWER PERFORMANCE

Motor	600 CFM
-------	---------


TECNICAL SPECS OF COOKERHOOD WITH 600 CFM MOTOR

	SRS 2*		SRS 3*	
Motor Speed	1	2	3	4
CFM (rated at the motor)	210	295	395	600
Sones (estimated value)	1.5	3	4.25	6
Duct Size	6"	6"	6"	6"


*If activated SRS has 2 settings; 3 speed max & 2 speed max

WEIGHTS AND DIMENSIONS


Gross weight	38 lbs
Net weight	31 lbs
Packaging dimensions	L 39 in H 15 in D 16 in
Notes	Recommended mounting height from cooking surface to hood bottom: 24" - 35

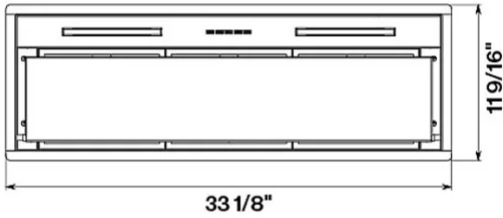


Bottom view

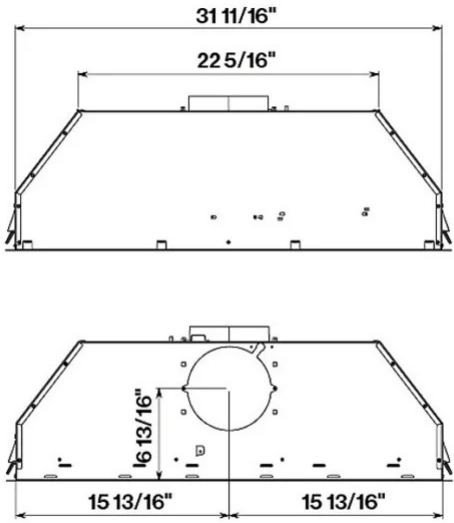


Frontal/rear view

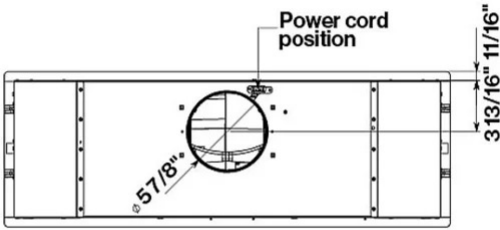

Top view



Side view

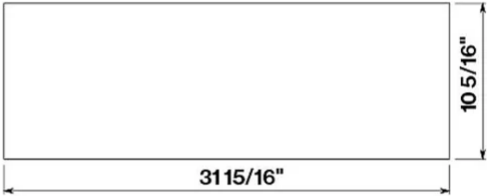

Hole sizes