

#### SRT364C



## **FEATURES**

4 dual-stacked burners plus 16,000 Btu infrared charbroiler

Dual-stacked burners go from 20,000 Btu down to a mere breath of flame

Continuous cast-iron grates for easy movement of pots and pans

Signature red infinite control knobs

Rigorously tested in our U.S. manufacturing facilities for decades of use

Exceptional 24/7 support from our Customer Care team in Madison

Heavy-gauge stainless steel

Spark ignition system re-ignites if flame goes out

## **ACCESSORIES**

2-Burner Wok Grate

Filler Trim

S-Grates

Stainless steel, brass or chrome bezels

High altitude conversion kit

Signature red, black or stainless steel control knobs

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.




### **KNOB OPTIONS**







# **TOP CONFIGURATION**



### **RANGETOP SPECIFICATIONS**

- 1 9,200 Btu Burner
- 1 15,000 Btu Burner
- 1 18,000 Btu Burner
- 1 20,000 Btu Burner
- 1 16,000 Btu Charbroiler




### PRODUCT SPECIFICATIONS

Model	SRT364C
Dimensions	35 7/8"W x 8 1/2"H x 28 1/2"D
Weight	220 lbs
Electrical Supply	110/120 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


## **ELECTRICAL**

## **GAS**




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

## **DIMENSIONS**

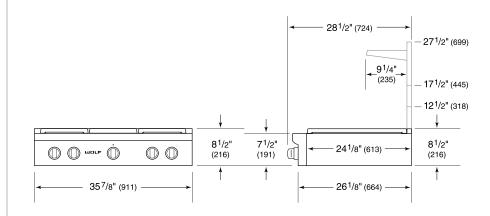

### STANDARD INSTALLATION

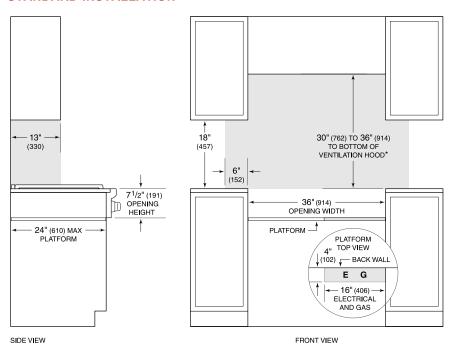

\*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces,

combustible materials cannot be located within this area. Electrical and gas supply located through bottom of platform.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.