


### **SPECIFICATION SHEET**

# FORTE RANGE HOOD WTT32I48SB




Traditional Italian design wall mount chimney hood. Design includes modern features and high performance necessary in today's upscale residential kitchens.

#### **FEATURES**

- Wall mount
- Finish: 430 Stainless Steel #4 Brushed
- Width: 48"
- Depth: 22"
- Duct connector with back draft damper 10" round
- Three-setting cook top lighting. Uses three (3), 50W, GU10 halogen lamps. Bulbs included.
- Quick release stainless steel / aluminum mesh filters are dishwasher safe.
- 4-speed electronic push button control with blue backlit selection indicators.
- Powerful, centrifugal blower with high efficiency motor produces 1200 CFM
- Quiet operation
- Heat Sentry <sup>™</sup> automatically turns blower to high speed when excess cooking heat is detected.
- Delay timer control automatically shuts off range hood after 5 minutes.
- Special control indicates when it's time to clean the filters.

#### **OPTIONS**

- Flue extension for 10-foot ceilings AEWTT328SB
- Make-up Air damper MD6T (6" duct), MD8T (8" duct)
- Relay and transformer included



NOTE: DIMENSIONS SHOWN ARE IN INCHES



#### **SPECIFICATIONS**

MODEL	MODEL VOLTS AMPS		CFM / SONES (High Speed)	CFM/ SONES (Low Speed)	DUCT	
WTT32I48SB	120	8.5	1200 / 12.0	400 / 2.0	10" round	




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.


BEST Drummondville, QC, Canada www.BestRangeHoods.ca 866-737-7770

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by Date

## WTT32I48SB WIRING

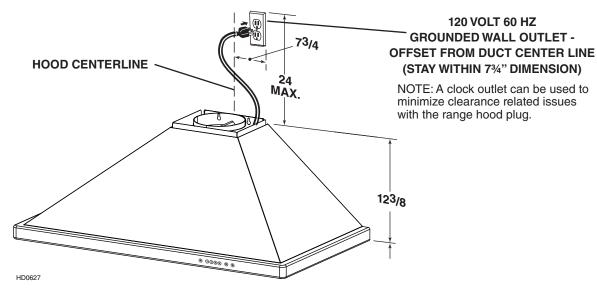

# WTT32I48SB MOUNTING

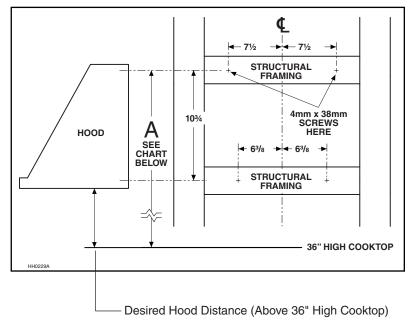

	24"	25"	26"	27"	28"	29"	30"		
Ceiling Height	Upper Mounting Screws Location (Distance above 36" High Cooktop) (DIMENSION "A")								
8 Feet	361/8"	371/8"	381/8"	391/8"	401/8"	411/8"	421/8"		
9 Feet					401/8"	411/8"	421/8"		
9 Feet with AEWTT328SB	36¹/ <sub>8</sub> "	37¹/8"	381/8"						
10 Feet with AEWTT328SB	36¹/8"	371/8"	381/8"	391/8"	401/8"	411/8"	421/8"		



# WTT32I48SB RANGE HOOD SYSTEM

