

## 46-INCH GAS COOKTOP


HPCT466G | PROFESSIONAL STYLE



## FEATURES & BENEFITS

- → Exclusive Bead-Blasted, PermaClean<sup>™</sup> Finish on a onepiece sealed spill basin makes cleaning easy and keeps cooktop scratch-free.
- Continuous Platform Grates are porcelain coated and allow extra large pots and pans to be moved effortlessly from burner to burner.
- → Burner Configuration: 6 Burners (64,500 Total BTUs)
  - 2 Sealed Gas Burners (14000 BTU)
  - 1 Sealed Gas Burner (12500 BTU)
  - 3 Sealed Gas Burners (8,500 BTU) HPCT466
- → Perma-Flame™ Technology automatically re-ignites a flame for continuous heating and uninterrupted cooking should a burner unexpectedly go out.
- → Exclusive SmartFlame<sup>™</sup> Technology reduces flame contact with grate to prevent grate discoloration and increase longevity.
- Brass Burners and Valves for superior reliability and longevity.
- → Downdraft Compatible.

GENERAL PROPERTIES						
FINISH	STAINLESS STEEL					
OPTIONAL ACCESSORIES						
WOK RING	AWR					
SIMMER PLATE	ASP10					
TECHNICAL INFORMATION						
ELECTRICAL REQUIREMENTS	120VAC/60HZ/15AMP					
GAS CONFIGURATIONS	NG - NATURAL GAS NG / H - NATURAL GAS / HIGH ALTITUDE LP - LIQUID PROPANE LP / H - LIQUID PROPANE / HIGH ALTITUDE					
PRODUCT DIMENSIONS						
APPLIANCE DIMENSIONS (H X W X D) (IN.)	4" X 46" X 21"					
ALL TOLERANCES	– 1/16" ( – 1.6MM) UNLESS OTHERWISE NOTED					





 $^{\ast}$  INCLUDING EMBOSSES/SCREWS IN SIDE OF CHASSIS

CONFIGURATION	CUTOUT TYPE	(C)	(D)	(E)	(F)	(G)	(H)
HPCT466 W/O DOWNDRAFT	SQUARE	2 7/8" (7.3 CM)	19 3/4" (50.2 CM)	44 1/2" (113.03 CM)	NA	NA	NA
HPCT466 WITH DOWNDRAFT PRV46	NOTCHED	3/8" (1.0CM)	22 1/2" (57.2CM)	44 1/2" (113.03CM)	43 1/2" (110.5CM)	5/8" (1.6CM)	2 5/8" ** (6.0CM)

 $<sup>\</sup>ensuremath{^{*}\text{Total}}$  cutout depth accommodates both the cooktop and downdraft.

DO NOT add notch depth to total cutout depth (D).

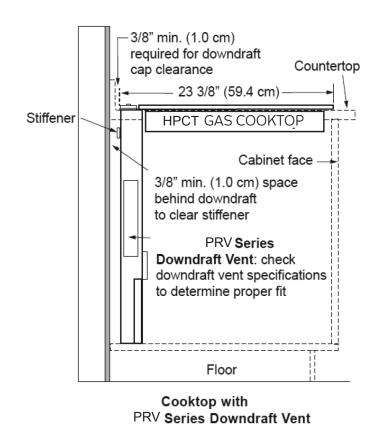

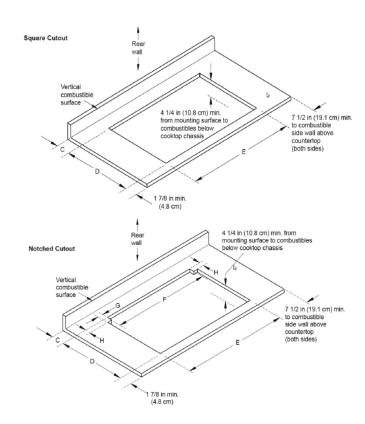

<sup>\*\*</sup>IMPORTANT: Notch depth is included in total cutout depth (D.).