## 24" Recessed Handle Dishwasher

800 Series - Stainless Steel SHEM78ZH5N





SHEM78ZH5N Stainless Steel

Patented CrystalDry™ technology transforms moisture into heat to get dishes, including plastics, 60% drier.\*

#### **Features & Benefits**

42 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

Home Connect™ delivers peace of mind with remote start, check cycle status, remote diagnostics, and automated tab replenishment through Amazon Dash.

The Flexible 3rd Rack with fold down sides adds 30% more\*\* loading area, perfect for utensils and ramekins.

The AquaStop® leak protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are away or at home.

General Properties	
Number of wash cycles	6
Number of options	6
dBA	42
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Touch Control
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Water softener	No
Five-level wash	Yes
ChildLock	No
Special features	Home Connect
Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5
Capacity	
Number of place settings	16



Technical Details		
Watts (W)	1440 W	
Current (A)	12 Amps	
Volts (V)	120 V	
Frequency (Hz)	60 Hz	
Power cord length - Install length from corner of unit	67"	
	45"	
Minimum water pressure (lb/sin)	14	
Length outlet hose (in)	79"	
Dimensions & Weight		
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"	
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"	
Adjustable feet	Yes	
Net weight (lbs)	102 lbs	
Accessories-Optional		
Junction Box	SMZPCJB1UC	
Bosch Dishwasher Water Supply Hose	SMZSH002UC	
Dishwasher Drain Hose Extension Kit	SGZ1010UC	
Dishwasher Accessory Kit	SMZ5000	
Anti-Tarnish Silverware Cassette	SMZ5002UC	
Edge Protector	SMZEP001UC	







<sup>\*</sup>Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry on combined household load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry. Drying performance may vary by dish type.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


<sup>\*\*</sup>Compared to a Bosch dishwasher with 2 racks.


### 24" Recessed Handle Dishwasher


800 Series - Stainless Steel SHEM78ZH5N





#### **Installation Details**

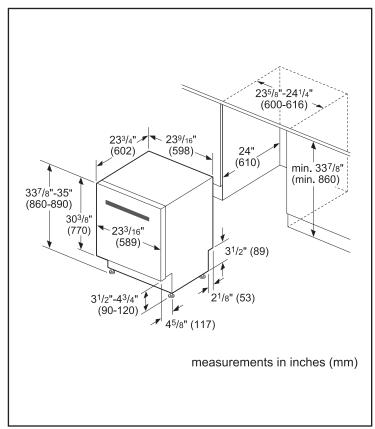

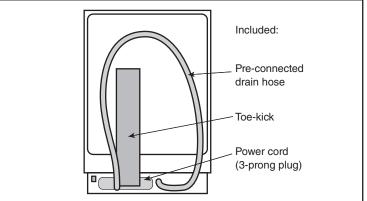

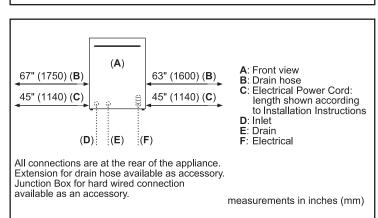

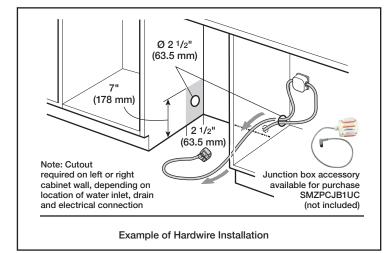

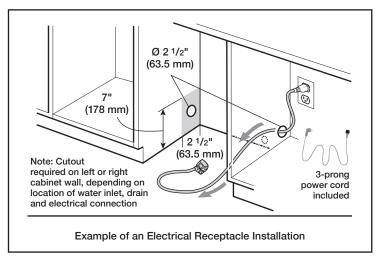

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


# 24" Recessed Handle Dishwasher

800 Series - Stainless Steel SHEM78ZH5N



#### **Installation Details**





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.